

不锈钢快插接头 STAINLESS STEEL PUSH IN FITTINGS

特点 Features

除密封圈外所有零件都采用SUS316L材料制成，这种材料具有很强的抗腐蚀能力。密封圈采用氟橡胶(FKM)，这种材料抗化学腐蚀性能力很强，而且耐酸、耐高温。这些零件都属于无油规格并符合食品卫生法，广泛应用于食品、化学、医疗等工业。The materials ensure Anti-Corrosion highly, all of them are made from SUS316L except the seal ring. FKM is used as the seal ring, which can ensures Anti-Corrosion and acid resistant, also can be used in high temperature. The accessories are oil-free and reach the Food Hygiene Law of People's Republic of China, which are applied widely in the range. of industry such as food service industry, chemical industry and medical industry.

使用范围说明 Specifications

使用流体/Fluid	空气、水、蒸气等/Air, Water, Steam
使用压力范围/Operating Pressure	0 – 1.5MPa
耐压/Max Pressure	1.8MPa
使用温度范围/Operating Temperature	-20℃ ~ 140℃

SUS不锈钢系列

产品标识形色 Product code system

SSC	6	—	01	X
①	②		③	④

①型号

②配管径：


编号	4	6	8	10	12	16
尺寸	φ 4mm	φ 6mm	φ 8mm	φ 10mm	φ 12mm	φ 16mm

③牙径：

编号	M5	01	02	03	04
尺寸	M5 × 0.8	R1/8	R1/4	R3/8	R1/2



结构图 Structural diagram

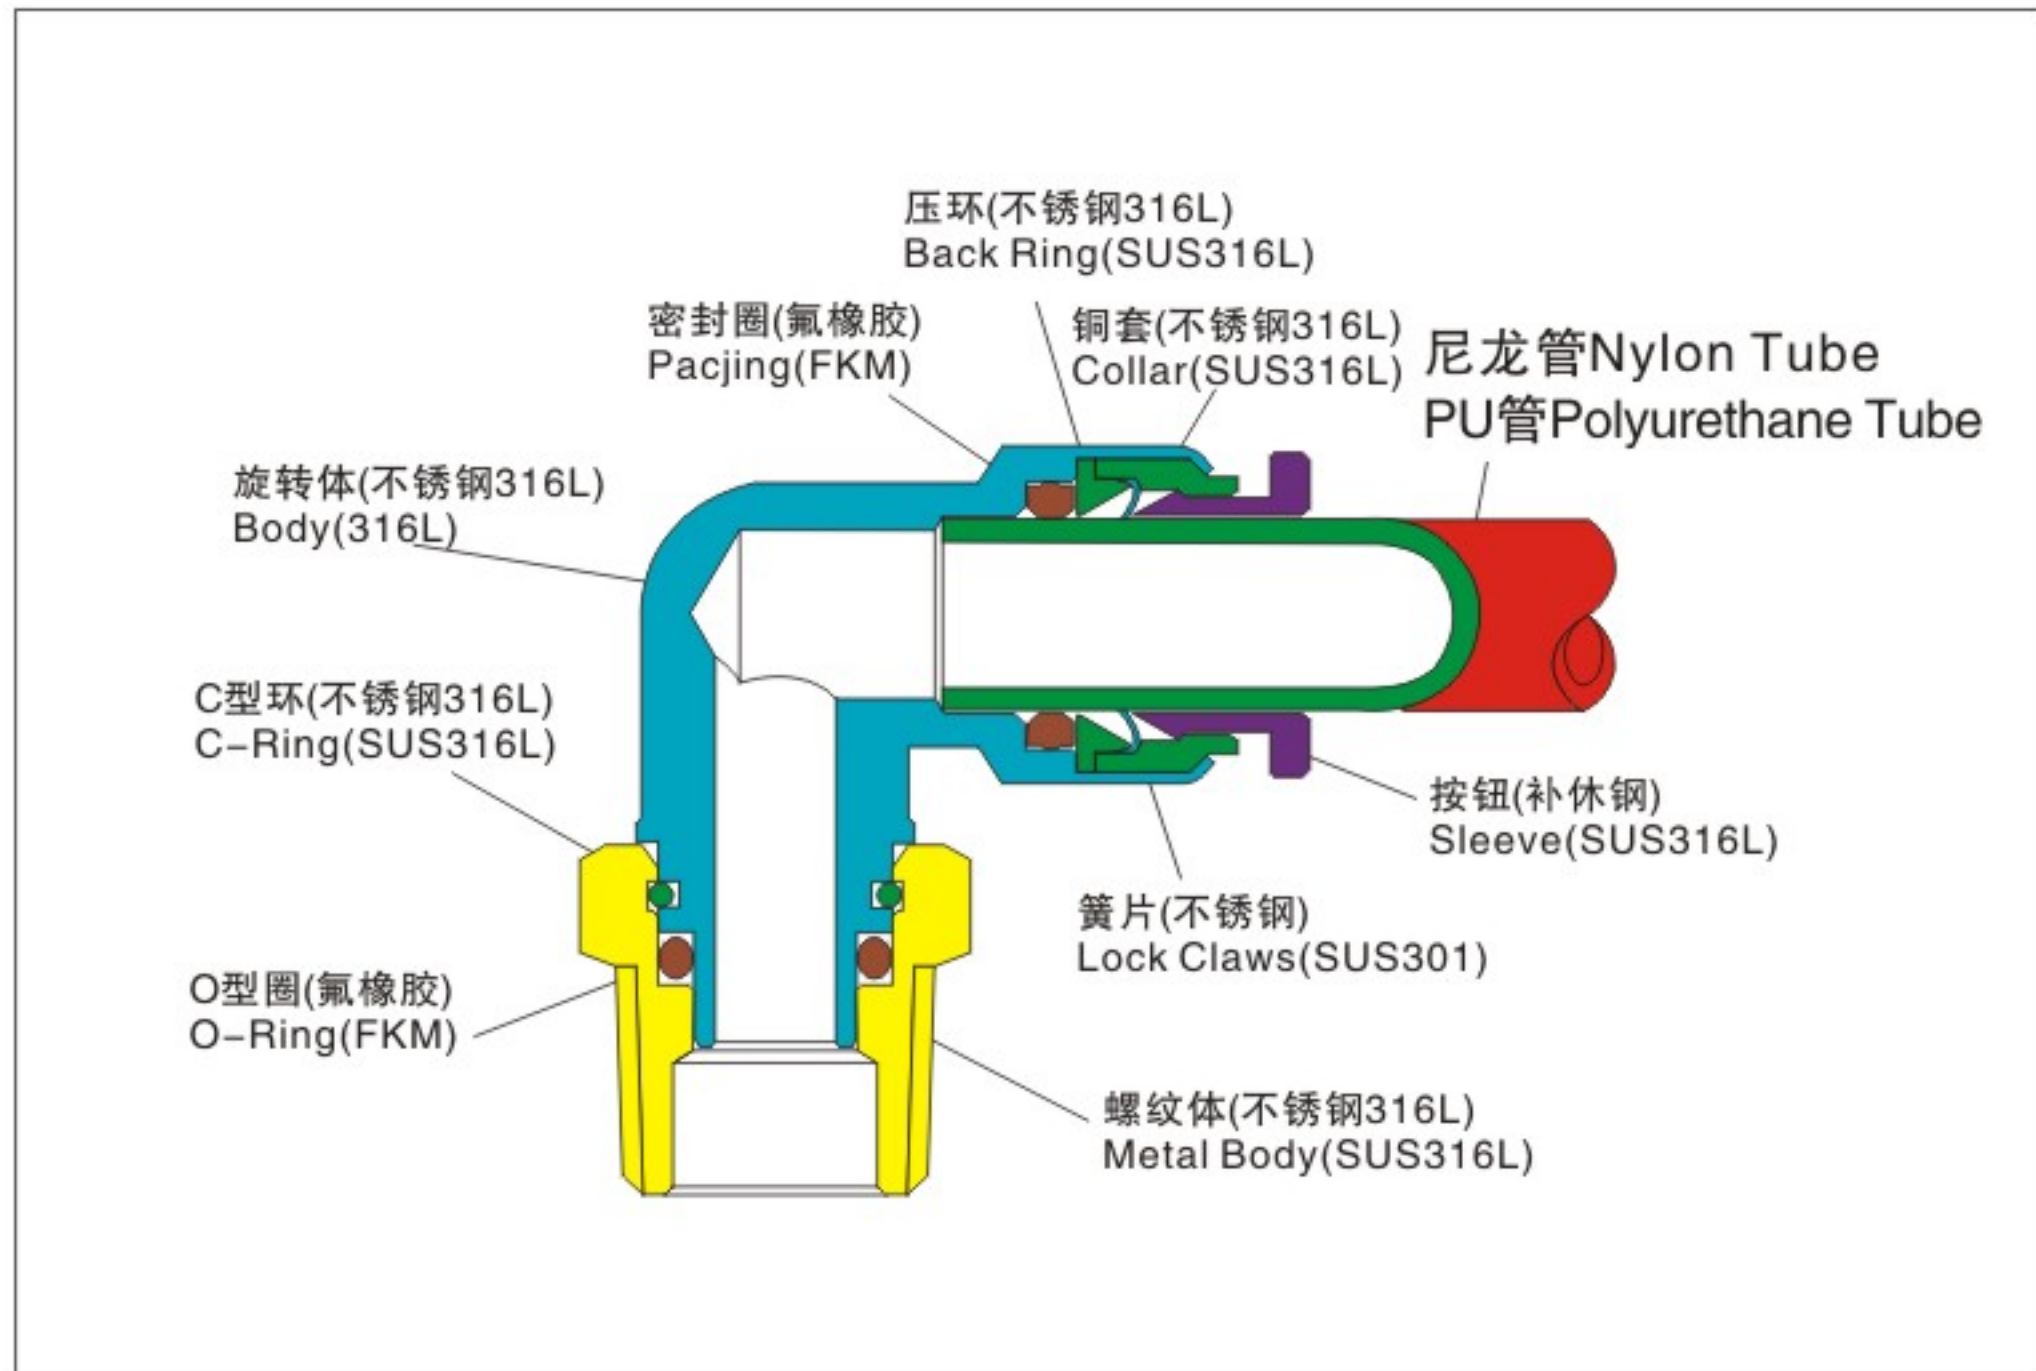

不锈钢快插接头 STAINLESS STEEL PUSH IN FITTINGS



型号Model(φ D)			
管(公制)Tube (metric)			
SSC04-M5	SSC06-03	SSC10-03	SSC14-04
SSC04-M6	SSC06-04	SSC10-04	SSC16-02
SSC04-01	SSC08-01	SSC12-01	SSC16-03
SSC04-02	SSC08-02	SSC12-02	SSC16-04
SSC06-M5	SSC08-03	SSC12-03	
SSC06-M6	SSC08-04	SSC12-04	
SSC06-01	SSC10-01	SSC14-02	
SSC06-02	SSC10-02	SSC14-03	



型号Model(φ D)		
管(公制)Tube (metric)		
SSC04-G01	SSC08-G03	SSC12-G03
SSC04-G02	SSC08-G04	SSC12-G04
SSC06-G01	SSC10-G01	SSC14-G02
SSC06-G02	SSC10-G02	SSC14-G03
SSC06-G03	SSC10-G03	SSC14-G04
SSC06-G04	SSC10-G04	SSC16-G02
SSC08-G01	SSC12-G01	SSC16-G03
SSC08-G02	SSC12-G02	SSC16-G04



型号Model(φ D)			
管(公制)Tube (metric)			
SSL04-M5	SSL06-03	SSL10-03	SSL14-04
SSL04-M6	SSL06-04	SSL10-04	SSL16-02
SSL04-01	SSL08-01	SSL12-01	SSL16-03
SSL04-02	SSL08-02	SSL12-02	SSL16-04
SSL06-M5	SSL08-03	SSL12-03	
SSL06-M6	SSL08-04	SSL12-04	
SSL06-01	SSL10-01	SSL14-02	
SSL06-02	SSL10-02	SSL14-03	



型号Model(φ D)		
管(公制)Tube (metric)		
SSL04-G01	SSL08-G03	SSL12-G03
SSL04-G02	SSL08-G04	SSL12-G04
SSL06-G01	SSL10-G01	SSL14-G02
SSL06-G02	SSL10-G02	SSL14-G03
SSL06-G03	SSL10-G03	SSL14-G04
SSL06-G04	SSL10-G04	SSL16-G02
SSL08-G01	SSL12-G01	SSL16-G03
SSL08-G02	SSL12-G02	SSL16-G04



型号Model(φ D)			
管(公制)Tube (metric)			
SSB04-M5	SSB06-03	SSB10-03	SSB14-04
SSB04-M6	SSB06-04	SSB10-04	SSB16-02
SSB04-01	SSB08-01	SSB12-01	SSB16-03
SSB04-02	SSB08-02	SSB12-02	SSB16-04
SSB06-M5	SSB08-03	SSB12-03	
SSB06-M6	SSB08-04	SSB12-04	
SSB06-01	SSB10-01	SSB14-02	
SSB06-02	SSB10-02	SSB14-03	



型号Model(φ D)		
管(公制)Tube (metric)		
SSB04-G01	SSB08-G03	SSB12-G03
SSB04-G02	SSB08-G04	SSB12-G04
SSB06-G01	SSB10-G01	SSB14-G02
SSB06-G02	SSB10-G02	SSB14-G03
SSB06-G03	SSB10-G03	SSB14-G04
SSB06-G04	SSB10-G04	SSB16-G02
SSB08-G01	SSB12-G01	SSB16-G03
SSB08-G02	SSB12-G02	SSB16-G04



型号Model(φ D)			
管(公制)Tube (metric)			
SSF04-M5	SSF06-03	SSF10-03	SSF14-04
SSF04-M6	SSF06-04	SSF10-04	SSF16-02
SSF04-01	SSF08-01	SSF12-01	SSF16-03
SSF04-02	SSF08-02	SSF12-02	SSF16-04
SSF06-M5	SSF08-03	SSF12-03	
SSF06-M6	SSF08-04	SSF12-04	
SSF06-01	SSF10-01	SSF14-02	
SSF06-02	SSF10-02	SSF14-03	



型号Model(φ D)	
管(公制)Tube (metric)	
SSU04-04	
SSU06-06	
SSU08-08	
SSU10-10	
SSU12-12	
SSU14-14	
SSU16-16	



型号Model(φ D)	
管(公制)Tube (metric)	
SSG06-04	
SSG08-06	
SSG10-06	
SSG10-08	
SSG12-08	
SSG12-10	



型号Model(φ D)	
管(公制)Tube (metric)	
SSV-04	
SSV-06	
SSV-08	
SSV-10	
SSV-12	
SSV-14	
SSV-16	



型号Model(φ D)	
管(公制)Tube (metric)	
SSE-04	
SSE-06	
SSE-08	
SSE-10	
SSE-12	
SSE-14	
SSE-16	



型号Model(φ D)	
管(公制)Tube (metric)	
SSM-04	
SSM-06	
SSM-08	
SSM-10	
SSM-12	
SSM-14	
SSM-16	



型号Model(φ D)	
管(公制)Tube (metric)	
SSNC04-M5	SSNC08-02
SSNC04-01	SSNC08-03
SSNC04-02	SSNC10-01
SSNC06-M5	SSNC10-02
SSNC06-01	SSNC10-03
SSNC06-02	SSNC10-04
SSNC06-03	SSNC12-03
SSNC08-01	SSNC12-04



型号Model(φ D)	
管(公制)Tube (metric)	
SSY06-04	SSY-08
SSY08-06	SSY-10
SSY10-06	SSY-12
SSY10-08	
SSY12-08	
SSY12-10	
SSY-04	
SSY-06	

不锈钢快拧接头 STAINLESS STEEL QUICK CONNECTOR

特点 Features

采用不锈钢#SUS304(#SUS316选用)材质，具有很高的耐腐蚀触性，此系列适用化工、密闭的特殊环境(医疗，半导体，食品等...)

规格

使用流体	空气、水/Air,Water
使用压力范围	配合搭配管材
工作真空	-29.8in.Hg(-100kPa)
使用温度范围	配合搭配管材

产品标识形色 Product code system

MNSC	04	-	01	S
①	②		③	④

③型号 ②管材直径：

编号	0420	0425	0640	0860	1075	1080	1290	1210
外径	φ 4	φ 4	φ 6	φ 8	φ 10	φ 10	φ 12	φ 12
内径	φ 2	φ 2.5	φ 4	φ 6	φ 7.5	φ 8	φ 9	φ 10

编号	1/4	5/16	3/8	1/2
外径	φ 6.35	φ 7.94	φ 9.53	φ 12.7
内径	φ 4.57	φ 6	φ 6.99	φ 9.56

③牙径：

编号	01	02	03	04
外径	R1/8	R1/4	R3/8	R1/2
内径	Rc1/8	Rc1/4	Rc3/8	Rc1/2

④材质：

代码	-	S
外径	SUS304	SUS316



MNSC 外螺纹直通	
型号Model(φ D)	
管(公制)Tube (metric)	
MNSC04-M5	MNSC10-02
MNSC04-01	MNSC10-03
MNSC04-02	MNSC10-04
MNSC04-03	MNSC12-01
MNSC04-04	MNSC12-02
MNSC06-M5	MNSC12-03
MNSC06-01	MNSC12-04
MNSC06-02	MNSC14-03
MNSC06-03	MNSC14-04
MNSC06-04	MNSC16-03
MNSC08-01	MNSC16-04
MNSC08-02	MNSC16-06
MNSC08-03	
MNSC08-04	
MNSC10-01	

MNSF 内螺纹直通	
型号Model(φ D)	
管(公制)Tube (metric)	
MNSF04-M5	MNSF10-02
MNSF04-01	MNSF10-03
MNSF04-02	MNSF10-04
MNSF04-03	MNSF12-01
MNSF04-04	MNSF12-02
MNSF06-M5	MNSF12-03
MNSF06-01	MNSF12-04
MNSF06-02	MNSF14-03
MNSF06-03	MNSF14-04
MNSF06-04	MNSF16-03
MNSF08-01	MNSF16-04
MNSF08-02	MNSF16-06
MNSF08-03	
MNSF08-04	
MNSF10-01	

MNSL 外螺纹弯通	
型号Model(φ D)	
管(公制)Tube (metric)	
MNSL04-01	MNSL12-03
MNSL04-02	MNSL12-04
MNSL06-01	MNSL14-02
MNSL06-02	MNSL14-03
MNSL06-03	MNSL14-04
MNSL06-04	MNSL16-04
MNSL08-01	MNSL16-06
MNSL08-02	
MNSL08-03	
MNSL08-04	
MNSL10-01	
MNSL10-02	
MNSL10-03	
MNSL10-04	
MNSL12-02	

MNSLF 内螺纹弯通	
型号Model(φ D)	
管(公制)Tube (metric)	
MNSLF04-01	MNSLF12-03
MNSLF04-02	MNSLF12-04
MNSLF06-01	MNSLF14-02
MNSLF06-02	MNSLF14-03
MNSLF06-03	MNSLF14-04
MNSLF06-04	MNSLF16-04
MNSLF08-01	MNSLF16-06
MNSLF08-02	
MNSLF08-03	
MNSLF08-04	
MNSLF10-01	
MNSLF10-02	
MNSLF10-03	
MNSLF10-04	
MNSLF12-02	

MNSB T型边部螺纹	
型号Model(φ D)	
管(公制)Tube (metric)	
MNSB04-01	MNSB12-03
MNSB04-02	MNSB12-04
MNSB06-01	MNSB14-03
MNSB06-02	MNSB14-04
MNSB06-03	MNSB16-03
MNSB06-04	MNSB16-04
MNSB08-01	MNSB16-06
MNSB08-02	
MNSB08-03	
MNSB08-04	
MNSB10-01	
MNSB10-02	
MNSB10-03	
MNSB10-04	
MNSB12-02	

MNSD T型中部螺纹	
型号Model(φ D)	
管(公制)Tube (metric)	
MNSD04-01	MNSD12-03
MNSD04-02	MNSD12-04
MNSD06-01	MNSD14-03
MNSD06-02	MNSD14-04
MNSD06-03	MNSD16-03
MNSD06-04	MNSD16-04
MNSD08-01	MNSD16-06
MNSD08-02	
MNSD08-03	
MNSD08-04	
MNSD10-01	
MNSD10-02	
MNSD10-03	
MNSD10-04	
MNSD12-02	

不锈钢卡套接头 STAINLESS STEEL BITE TYPE FITTINGS

产品标识形色 Product code system

AMSC	6	-	01	X
①	②		③	④

①型号

②配管径：

编号	4	6	8	10	12	16
尺寸	φ 4	φ 6	φ 8	φ 10	φ 12	φ 16

③牙径：

编号	M5	01	02	03	04
尺寸	M5×0.8	R1/8	R1/4	R3/8	R1/2

规格

使用流体	空气、水/Air,Water
使用压力范围	配合搭配管材
工作真空	-29.8in.Hg(-100kPa)
使用温度范围	配合搭配管材

AMSC 外螺纹直通		
型号Model(φ D)		
管(公制)Tube (metric)		
AMSC04-01	AMSC08-03	AMSC12-04
AMSC04-02	AMSC08-04	AMSC14-02
AMSC06-01	AMSC10-01	AMSC14-03
AMSC06-02	AMSC10-02	AMSC14-04
AMSC06-03	AMSC10-03	AMSC16-04
AMSC06-04	AMSC10-04	AMSC16-06
AMSC08-01	AMSC12-02	
AMSC08-02	AMSC12-03	

MNSM 隔板直通	
型号Model(φ D)	
管(公制)Tube (metric)	
MNSM04-04	
MNSE06-06	
MNSM08-08	
MNSM10-10	
MNSM12-12	
MNSM14-14	
MNSM16-16	

MNSE T型三通	
型号Model(φ D)	
管(公制)Tube (metric)	
MNSE04-04-04	
MNSE06-06-06	
MNSE08-08-08	
MNSE10-10-10	
MNSE12-12-12	
MNSE14-14-14	
MNSE16-16-16	

MNSU 联管直通	
型号Model(φ D)	
管(公制)Tube (metric)	
MNSU04-04	
MNSU06-06	
MNSU08-08	
MNSU10-10	
MNSU12-12	
MNSU14-14	
MNSU16-16	

MNSV 联管弯通	
型号Model(φ D)	
管(公制)Tube (metric)	
MNSV04-04	
MNSVSLT06-06	
MNSVSLT08-08	
MNSVSLT10-10	
MNSVSLT12-12	
MNSVSLT14-14	
MNSVSLT16-16	

MNSU 联管直通	
型号Model(φ D)	
管(公制)Tube (metric)	
MNSU06-04	
MNSU08-06	
MNSU10-08	
MNSU12-10	
MNSU14-12	
MNSU16-14	

MNSZA 联管四通	
型号Model(φ D)	
管(公制)Tube (metric)	
MNSZA-04	
MNSZA-06	
MNSZA-80	
MNSZA-10	
MNSZA-12	
MNSZA-14	
MNSZA-16	

AMSV 联管直通	
型号Model(φ D)	
管(公制)Tube (metric)	
AMSV04-04	
AMSV06-06	
AMSV08-08	
AMSV10-10	
AMSV12-12	
AMSV14-14	
AMSV16-16	

AMSE T型三通	
型号Model(φ D)	
管(公制)Tube (metric)	
AMSE04-04-04	
AMSE06-06-06	
AMSE08-08-08	
AMSE10-10-10	
AMSE12-12-12	
AMSE14-14-14	
AMSE16-16-16	

1108-06 外螺纹针阀	
型号Model(φ D)	
管(公制)Tube (metric)	
1108-06G1/8	
1108-06G1/4	
1108-06G3/8	
1108-06G1/2	

AMSV 联管弯通	
型号Model(φ D)	
管(公制)Tube (metric)	
AMSV04-04	
AMSV06-06	
AMSV08-08	
AMSV10-10	
AMSV12-12	
AMSV14-14	
AMSV16-16	

AMSA 联管四通	
型号Model(φ D)	
管(公制)Tube (metric)	
AMSA-04	
AMSA-06	
AMSA-80	
AMSA-10	
AMSA-12	
AMSA-14	
AMSA-16	

1108-08 卡套式针阀	
型号Model(φ D)	
管(公制)Tube (metric)	
1108-08-3MM	
1108-08-4MM	
1108-08-6MM	
1108-08-8MM	
1108-08-10MM	
1108-08-12MM	

不锈钢宝塔式系列管接头 STAINLESS STEEL BARB FITTINGS

特点 Features

采用不锈钢#SUS304(#SUS316选用)材质，具有很高的耐腐蚀触性，此系列适用化工、密闭的特殊环境(医疗，半导体，食品等...)

规格

使用流体	空气、水/Air,Water
使用压力范围	配合搭配管材
工作真空	-29.8in.Hg(-100kPa)
使用温度范围	配合搭配管材

产品标识形色 Product code system

MNSC	04	-	01	S
①	②		③	③

①型号 ②管材直径：

编号	0420	0425	0640	0860	1075	1080	1290	1210
外径	φ 4	φ 4	φ 6	φ 8	φ 10	φ 10	φ 12	φ 12
内径	φ 2	φ 2.5	φ 4	φ 6	φ 7.5	φ 8	φ 9	φ 10
编号	1/4	5/16	3/8	1/2				
外径	φ 6.35	φ 7.94	φ 9.53	φ 12.7				
内径	φ 4.57	φ 6	φ 6.99	φ 9.56				

③牙径：

编号	01	02	03	04
外径	R1/8	R1/4	R3/8	R1/2
内径	Rc1/8	Rc1/4	Rc3/8	Rc1/2
④材质：				
代码	-		S	
外径	SUS304		SUS316	

NESC 终端接头	
	
型号Model(φ D)	
管(公制)Tube (matric)	
NESC04-M5	NESC10-04
NESC04-01	NESC12-01
NESC04-02	NESC12-02
NESC06-M5	NESC12-03
NESC06-01	NESC12-04
NESC06-02	NESC14-03
NESC06-03	NESC14-04
NESC06-04	NESC16-03
NESC08-01	NESC16-04
NESC08-02	NESC16-06
NESC08-03	NESC20-03
NESC08-04	NESC20-04
NESC10-01	
NESC10-02	
NESC10-03	

NESF 终端内螺纹接头	
	
型号Model(φ D)	
管(公制)Tube (matric)	
NESF04-M5	NESF10-04
NESF04-01	NESF12-01
NESF04-02	NESF12-02
NESF06-M5	NESF12-03
NESF06-01	NESF12-04
NESF06-02	NESF14-03
NESF06-03	NESF14-04
NESF06-04	NESF16-03
NESF08-01	NESF16-06
NESF08-02	
NESF08-03	
NESF08-04	
NESF10-01	
NESF10-02	
NESF10-03	

不锈钢迷你 STAINLESS STEEL MINI FITTINGS

特点 Features

可用于耐腐蚀环境
采用软管锁紧接头或倒钩接头连接


产品标识形色 Product code system

MS	5AU	-	3
----	-----	---	---

规格

适合管子材质	尼龙	软尼龙	聚氨酯
适合管子外径/内径	Φ4/Φ2.5, Φ6/Φ4	Φ3.18/Φ2.18, Φ4/Φ2.5, Φ6/Φ4	Φ3.18/Φ2, Φ4/Φ2.5, Φ6/Φ4
最高适用压力(20℃时)	1.5MPa	1.0MPa	0.8MPa
连接尺寸	Polyurethane and nylon		

结构图 Structural diagram

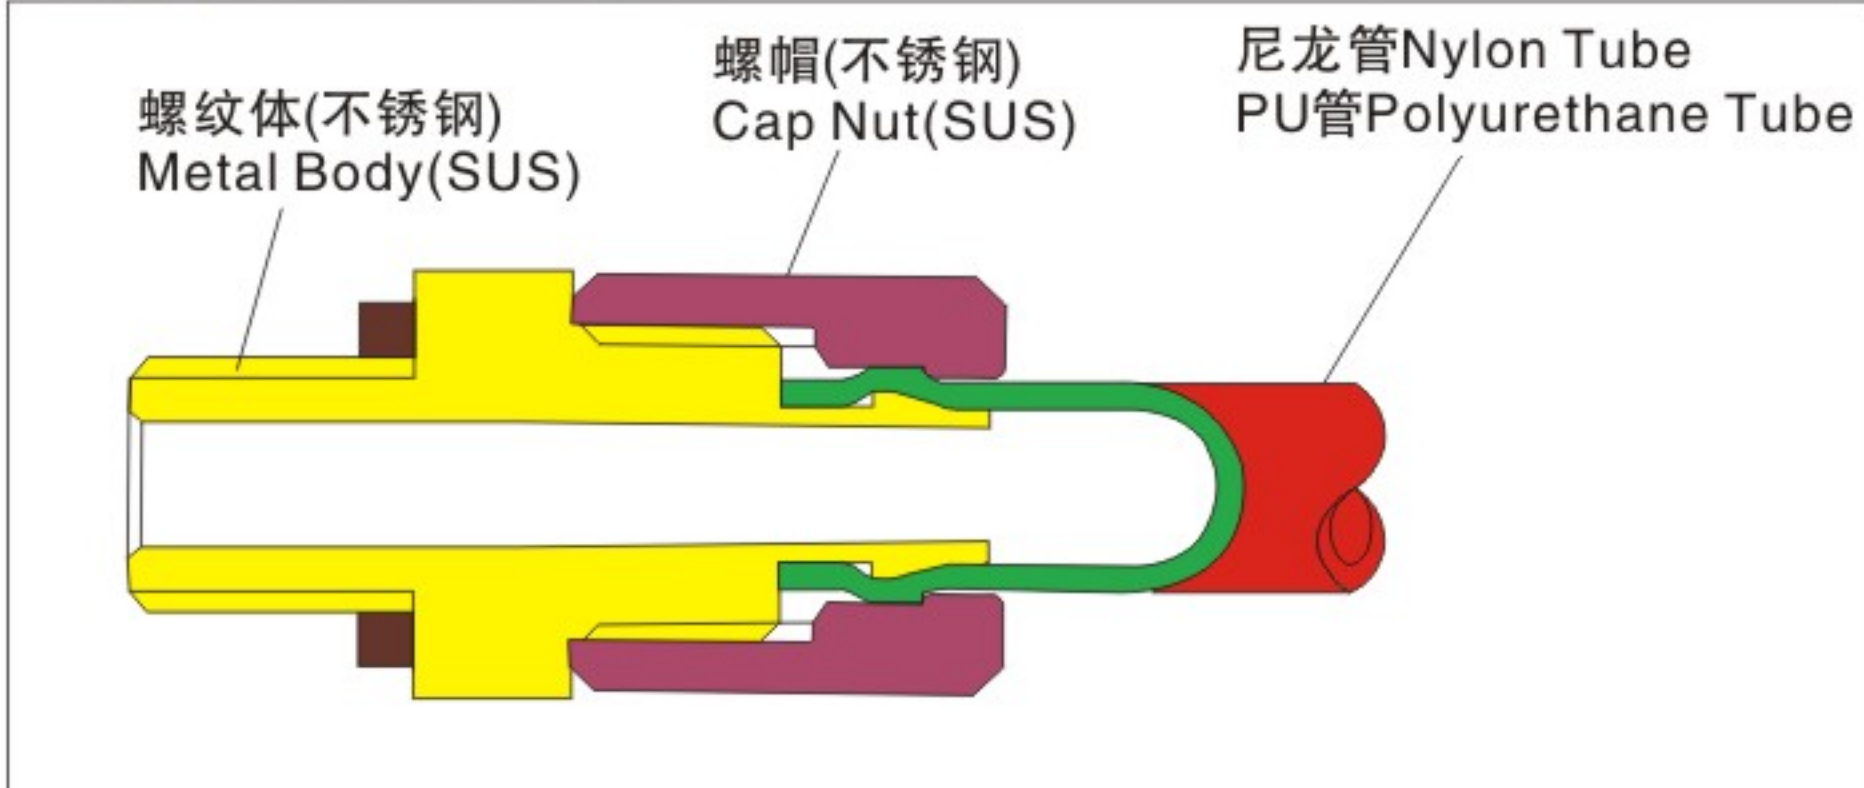

NESU 直通接头	
	
型号Model(φ D)	
管(公制)Tube (matric)	
NUSU-04	
NUSU-06	
NUSU-08	
NUSU-10	
NUSU-12	
NUSU-14	
NUSU-16	

NESE 三通接头	
	
型号Model(φ D)	
管(公制)Tube (matric)	
NESE-04	
NESE-06	
NESE-08	
NESE-10	
NESE-12	
NESE-14	
NESE-16	

NESL 直角外螺纹接头	
	
型号Model(φ D)	
管(公制)Tube (matric)	
NESL4-M5	NESL10-04
NESL4-01	NESL12-01
NESL4-02	NESL12-02
NESL6-M5	NESL12-03
NESL6-01	NESL12-04
NESL6-02	NESL14-02
NESL6-03	NESL14-03
NESL6-04	NESL14-04
NESL8-01	NESL16-04
NESL8-02	NESL16-06
NESL8-03	NESL20-03
NESL8-04	NESL20-04
NESL10-01	
NESL10-02	
NESL10-03	

EDT 三通中部螺纹接头	
	
型号Model(φ D)	
管(公制)Tube (matric)	
NESD4-M5	NESD10-04
NESD4-01	NESD12-01
NESD4-02	NESD12-02
NESD6-M5	NESD12-03
NESD6-01	NESD12-04
NESD6-02	NESD14-03
NESD6-03	NESD14-04
NESD6-04	NESD16-03
NESD8-01	NESD16-04
NESD8-02	NESD16-06
NESD8-03	
NESD8-04	
NESD10-01	
NESD10-02	
NESD10-03	

NESZA 四通管接头	
	
型号Model(φ D)	
管(公制)Tube (matric)	
NESZA-04	
NESZA-06	
NESZA-08	
NESZA-10	
NESZA-12	
NESZA-14	
NESZA-16	

四通内螺纹	
	
型号Model(φ D)	
管(公制)Tube (matric)	
01	
02	
03	
04	
N01	
N02	
N03	
N04	

MS-AU 软管用倒钩接头	
	
型号Model(φ D)	
管(公制)Tube (matric)	
MS-5AU-3	
MS-5AU-4	
MS-5AU-6	

MS-ATHU 软管用T形接头	
	
型号Model(φ D)	
管(公制)Tube (matric)	
MS-5ATHU-3	
MS-5ATHU-4	
MS-5ATHU-6	

MS-UL 万向弯头	
	
型号Model(φ D)	
管(公制)Tube (matric)	
MS-5UL	

MS-ALHU 软管用倒钩接头	
	
型号Model(φ D)	
管(公制)Tube (matric)	
MS-5ALHU-3	
MS-5ALHU-4	
MS-5ALHU-6	

四通边部外螺纹	
	
型号Model(φ D)	
管(公制)Tube (matric)	
01	
02	
03	
04	
N01	
N02	
N03	
N04	

T型三通内螺	
	
型号Model(φ D)	
管(公制)Tube (matric)	
G1/8	
G1/4	
G3/8	
G1/2	

YM堵头	
	
型号Model(φ D)	
管(公制)Tube (matric)	
M5	
G1/8	
G1/4	
G3/8	
G1/2	
G3/4	
G1	

YJ内外螺	
	
型号Model(φ D)	
管(公制)Tube (matric)	
G1/8-M5	
G1/8-G1/8	
G3/8-G1/4	
G1/2-G3/8	
G1/2-G1/2	
G3/4-G3/4	
G1-G1	

YD直通内螺	
	
型号Model(φ D)	
管(公制)Tube (matric)	
M5-M5	
G1/8-G1/8	
G1/4-G1/4	
G3/8-G3/8	
G1/2-G1/2	
G3/4-G3/4	
G1-G1	

LY直接外螺	
	
型号Model(φ D)	
管(公制)Tube (matric)	
M5-M5	
G1/8-G1/8	
G1/4-G1/4	
G3/8-G3/8	
G1/2-G1/2	
G3/4-G3/4	
G1-G1	

MS-LF 内螺纹弯头	
	
型号Model(φ D)	
管(公制)Tube (matric)	
MS-5LF-3	
MS-5LF-4	
MS-5LF-6	

MS-ET T型内螺纹三通	
	
型号Model(φ D)	
管(公制)Tube (matric)	
MS-5ET	

MS-H 软管锁紧接头	
	
型号Model(φ D)	
管(公制)Tube (matric)	
MS-5H-4	
MS-5H-6	

MS-HLH 软管锁紧弯头	
	
型号Model(φ D)	
管(公制)Tube (matric)	
MS-5HLH4	
MS-5HLH6	

MS-HU 锁管直通	
	
型号Model(φ D)	
管(公制)Tube (matric)	
MS-HU-3	
MS-HU-4	
MS-HU-6	

全铜快插接头 METAL FITTINGS

特点 Features

接头主体是全铜,具有坚固耐热使用可靠特点
管子接连用快插结构,安装拆卸方便
接头接管方向可任意旋转,密封可靠,使用方便

使用范围说明 Specifications

使用流体	Air(No other gases or liquids)	
使用压力	0~150PSI	0~10Kgf/cm²(0~1000kPa)
负压	-29.5in Hg	-750mm Hg (10Torr)
使用温度范围	32~140° F	-10~60℃
使用气管种类	Polyurethane and nylon	

产品标识形色 Product code system

MPC	08	—	02
①	②		③

① 型号

② 管径大小(D)

	Metric aize						Lnce size					
Code	04	06	08	10	12	16	5/32	3/16	1/4	5/16	3/8	1/2
Dia	φ 4	φ 6	φ 8	φ 10	φ 12	φ 16	φ 5/32	φ 3/16	φ 1/4	φ 5/16	φ 3/8	φ 1/2


③ 螺纹规格

*Metric thread & R(PT)thread						
	Metric aize		Taper pipe thread			
Code	M5	M6	01	02	03	04
Size	M5×0.8	M6×1.0	R1/8	R1/4	R3/8	R1/2

*Inch thread (NUF & NPT)					
	Unified fine thread		American standard taper pipe thread		
Code	U10U		U01U	U02U	U03U
Size	10-32UNF		NPT1/8	NPT1/4	NPT3/8



结构图 Structural diagram

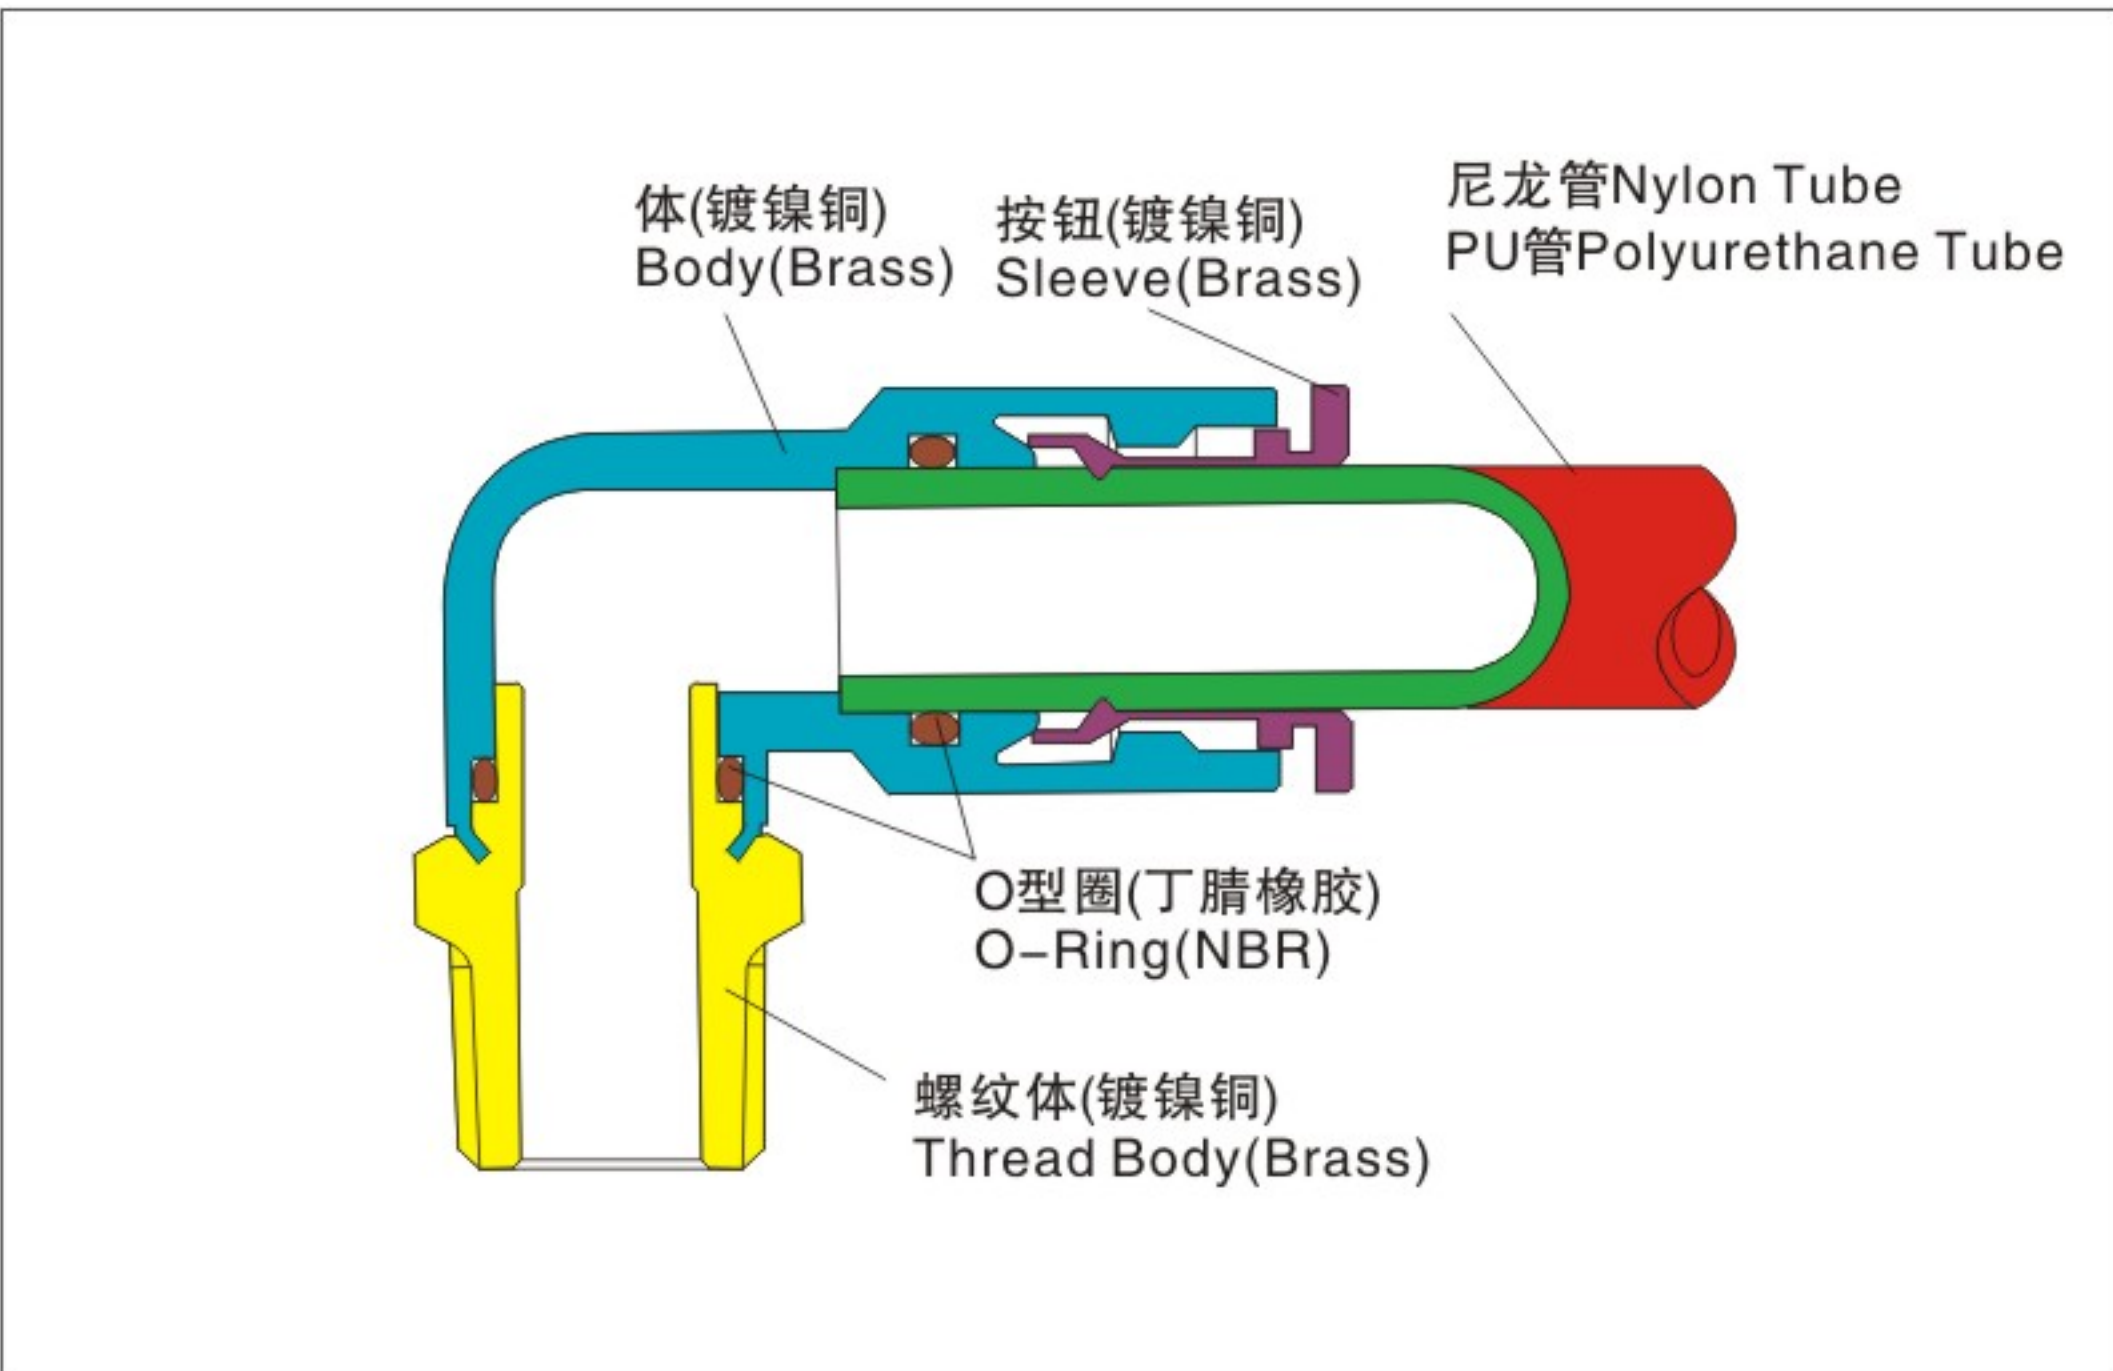

全铜快插接头 METAL FITTINGS

MPCT 终端接头	
型号Model(φ D)	
管(公制)Tube (metric)	
MPCT4-M5	MPCT10-04
MPCT4-01	MPCT12-01
MPCT4-02	MPCT12-02
MPCT6-M5	MPCT12-03
MPCT6-01	MPCT12-04
MPCT6-02	MPCT14-02
MPCT6-03	MPCT14-03
MPCT6-04	MPCT14-04
MPCT8-01	
MPCT8-02	
MPCT8-03	
MPCT8-04	
MPCT10-01	
MPCT10-02	
MPCT10-03	

MPOCT 圆柱内六角接头	
型号Model(φ D)	
管(公制)Tube (metric)	
MPOCT4-M5	MPOCT10-04
MPOCT4-01	MPOCT12-01
MPOCT4-02	MPOCT12-02
MPOCT6-M5	MPOCT12-03
MPOCT6-01	MPOCT12-04
MPOCT6-02	MPOCT14-02
MPOCT6-03	MPOCT14-03
MPOCT6-04	MPOCT14-04
MPOCT8-01	
MPOCT8-02	
MPOCT8-03	
MPOCT8-04	
MPOCT10-01	
MPOCT10-02	
MPOCT10-03	

MPCFT内螺纹接头	
型号Model(φ D)	
管(公制)Tube (metric)	
MPCFT4-M5	MPCFT10-04
MPCFT4-01	MPCFT12-01
MPCFT4-02	MPCFT12-02
MPCFT6-M5	MPCFT12-03
MPCFT6-01	MPCFT12-04
MPCFT6-02	MPCFT14-02
MPCFT6-03	MPCFT14-03
MPCFT6-04	MPCFT14-04
MPCFT8-01	
MPCFT8-02	
MPCFT8-03	
MPCFT8-04	
MPCFT10-01	
MPCFT10-02	
MPCFT10-03	

MPLT 直角外螺纹接头	
型号Model(φ D)	
管(公制)Tube (metric)	
MPLT4-M5	MPLT10-04
MPLT4-01	MPLT12-01
MPLT4-02	MPLT12-02
MPLT6-M5	MPLT12-03
MPLT6-01	MPLT12-04
MPLT6-02	MPLT14-02
MPLT6-03	MPLT14-03
MPLT6-04	MPLT14-04
MPLT8-01	
MPLT8-02	
MPLT8-03	
MPLT8-04	
MPLT10-01	
MPLT10-02	
MPLT10-03	

MPLFT 直角内螺纹接头	
型号Model(φ D)	
管(公制)Tube (metric)	
MPLFT4-M5	MPLFT10-04
MPLFT4-01	MPLFT12-01
MPLFT4-02	MPLFT12-02
MPLFT6-M5	MPLFT12-03
MPLFT6-01	MPLFT12-04
MPLFT6-02	MPLFT14-02
MPLFT6-03	MPLFT14-03
MPLFT6-04	MPLFT14-04
MPLFT8-01	
MPLFT8-02	
MPLFT8-03	
MPLFT8-04	
MPLFT10-01	
MPLFT10-02	
MPLFT10-03	

MPBT三通中部螺纹接头	
型号Model(φ D)	
管(公制)Tube (metric)	
MPBT4-M5	MPBT10-04
MPBT4-01	MPBT12-01
MPBT4-02	MPBT12-02
MPBT6-M5	MPBT12-03
MPBT6-01	MPBT12-04
MPBT6-02	MPBT14-02
MPBT6-03	MPBT14-03
MPBT6-04	MPBT14-04
MPBT8-01	
MPBT8-02	
MPBT8-03	
MPBT8-04	
MPBT10-01	
MPBT10-02	
MPBT10-03	

MPDT 三通边部螺纹接头	
型号Model(φ D)	
管(公制)Tube (metric)	
MPDT4-M5	MPDT10-04
MPDT4-01	MPDT12-01
MPDT4-02	MPDT12-02
MPDT6-M5	MPDT12-03
MPDT6-01	MPDT12-04
MPDT6-02	MPDT14-02
MPDT6-03	MPDT14-03
MPDT6-04	MPDT14-04
MPDT8-01	
MPDT8-02	
MPDT8-03	
MPDT8-04	
MPDT10-01	
MPDT10-02	
MPDT10-03	

MPZRT 四通螺纹接头	
型号Model(φ D)	
管(公制)Tube (metric)	
MPZRT4-M5	MPZRT10-04
MPZRT4-01	MPZRT12-01
MPZRT4-02	MPZRT12-02
MPZRT6-M5	MPZRT12-03
MPZRT6-01	MPZRT12-04
MPZRT6-02	MPZRT14-02
MPZRT6-03	MPZRT14-03
MPZRT6-04	MPZRT14-04
MPZRT8-01	
MPZRT8-02	
MPZRT8-03	
MPZRT8-04	
MPZRT10-01	
MPZRT10-02	
MPZRT10-03	

MPHT直角铰接式可旋转接头	
型号Model(φ D)	
管(公制)Tube (metric)	
MPHT4-M5	MPHT10-04
MPHT4-01	MPHT12-01
MPHT6-M5	MPHT12-03
MPHT6-01	MPHT12-04
MPHT6-02	MPHT14-02
MPHT6-03	MPHT14-03
MPHT6-04	MPHT14-04
MPHT8-01	
MPHT8-02	
MPHT8-03	
MPHT8-04	
MPHT10-01	
MPHT10-02	
MPHT10-03	

MPMMT S直通穿板接头	
型号Model(φ D)	
管(公制)Tube (metric)	
MPMMT4	
MPMMT6	
MPMMT8	
MPMMT10	
MPMMT12	
MPMMT14	

MPUT 二通接头	
型号Model(φ D)	
管(公制)Tube (metric)	
MPUT4	
MPUT6	
MPUT8	
MPUT10	
MPUT12	
MPUT14	

MPGT 直通变径接头	
型号Model(φ D)	
管(公制)Tube (metric)	
MPGT4-6	
MPGT6-8	
MPGT8-10	
MPGT10-12	
MPGT12-14	

MPVT 直角接头	
型号Model(φ D)	
管(公制)Tube (metric)	
MPVT-04	
MPVT-06	
MPVT-08	
MPVT-10	
MPVT-12	
MPVT-14	
MPVT-16	

MPET 三通接头	
型号Model(φ D)	
管(公制)Tube (metric)	
MPET-04	
MPET-06	
MPET-08	
MPET-10	
MPET-12	
MPET-14	
MPET-16	

MPZAT四通接头	
型号Model(φ D)	
管(公制)Tube (metric)	
MPZAT-04	
MPZAT-06	
MPZAT-08	
MPZAT-10	
MPZAT-12	
MPZAT-14	
MPZAT-16	

MPSCT 单向调速阀	
型号Model(φ D)	
管(公制)Tube (metric)	
MPSCT4-M5	MPSCT10-04
MPSCT4-01	MPSCT12-02
MPSCT4-02	MPSCT12-03
MPSCT6-M5	MPSCT12-04
MPSCT6-01	
MPSCT6-02	
MPSCT6-03	
MPSCT6-04	
MPSCT8-01	
MPSCT8-02	
MPSCT8-03	
MPSCT8-04	
MPSCT10-01	
MPSCT10-02	
MPSCT10-03	

PMFT 全铜隔板内螺纹直通	
型号Model(φ D)	
管(公制)Tube (metric)	
PMFT04-01	PMF12-04
PMFT04-02	
PMFT06-01	
PMFT06-02	
PMFT06-03	
PMFT08-01	
PMFT08-02	
PMFT08-03	
PMFT08-04	
PMFT10-01	
PMFT10-02	
PMFT10-03	
PMFT10-04	
PMFT12-02	
PMFT12-03	

PGJT 全铜插入型直通	
型号Model(φ D)	
管(公制)Tube (metric)	
PGJT06-04	
PGJT06-06	
PGJT06-08	
PGJT06-10	

全铜快拧接头 METAL RAPICL FITTINGS

特点 Features

- ①江淮接头JiangHuai FITTINGS
②快拧接头型号PUSH ON FITTINGS MODEL
BZL表示为不旋转弯头型号BZL WON'T BE SWIVEL ELBOW TYPE
③插气管外径. TUBE OUTER DIA

	Metric aize				
Code	04	06	08	10	12
Dia	4	6	8	10	12

- ④螺纹型式及尺寸THREAD TYPE AND SIZE

	55° Taper Pipe Thread				
Code	01	02	03	04	06
Dia	R1/8	R1/4	R3/8	R1/2	R3/4


	55° G- Thread				
Code	01	02	03	04	06
Dia	R1/8	R1/4	R3/8	R1/2	R3/4

产品标识形色 Product code system

I	BC	-	8	01	*	*
①	②		③	④	⑤	⑥

- 公制螺纹METRIC SIZE
用公制螺纹标准表示方法表示, 例: M5, M10X1
THE METHOD OF METRIC THREAD, EX: M5, M10X1
⑤表示插气管内径规格, 见右表
THE SPECIFICATION OF PUSHING TUBE I.D. REFER TO THE PICTURE AT RIGHT
⑥表示快拧接头螺母ATTACHED THE THREAD OF PUSH ON FITTING
空白BLANK:滚花螺母/KNURLING S: 六角螺母/HEXAGON

结构图 Structural diagram

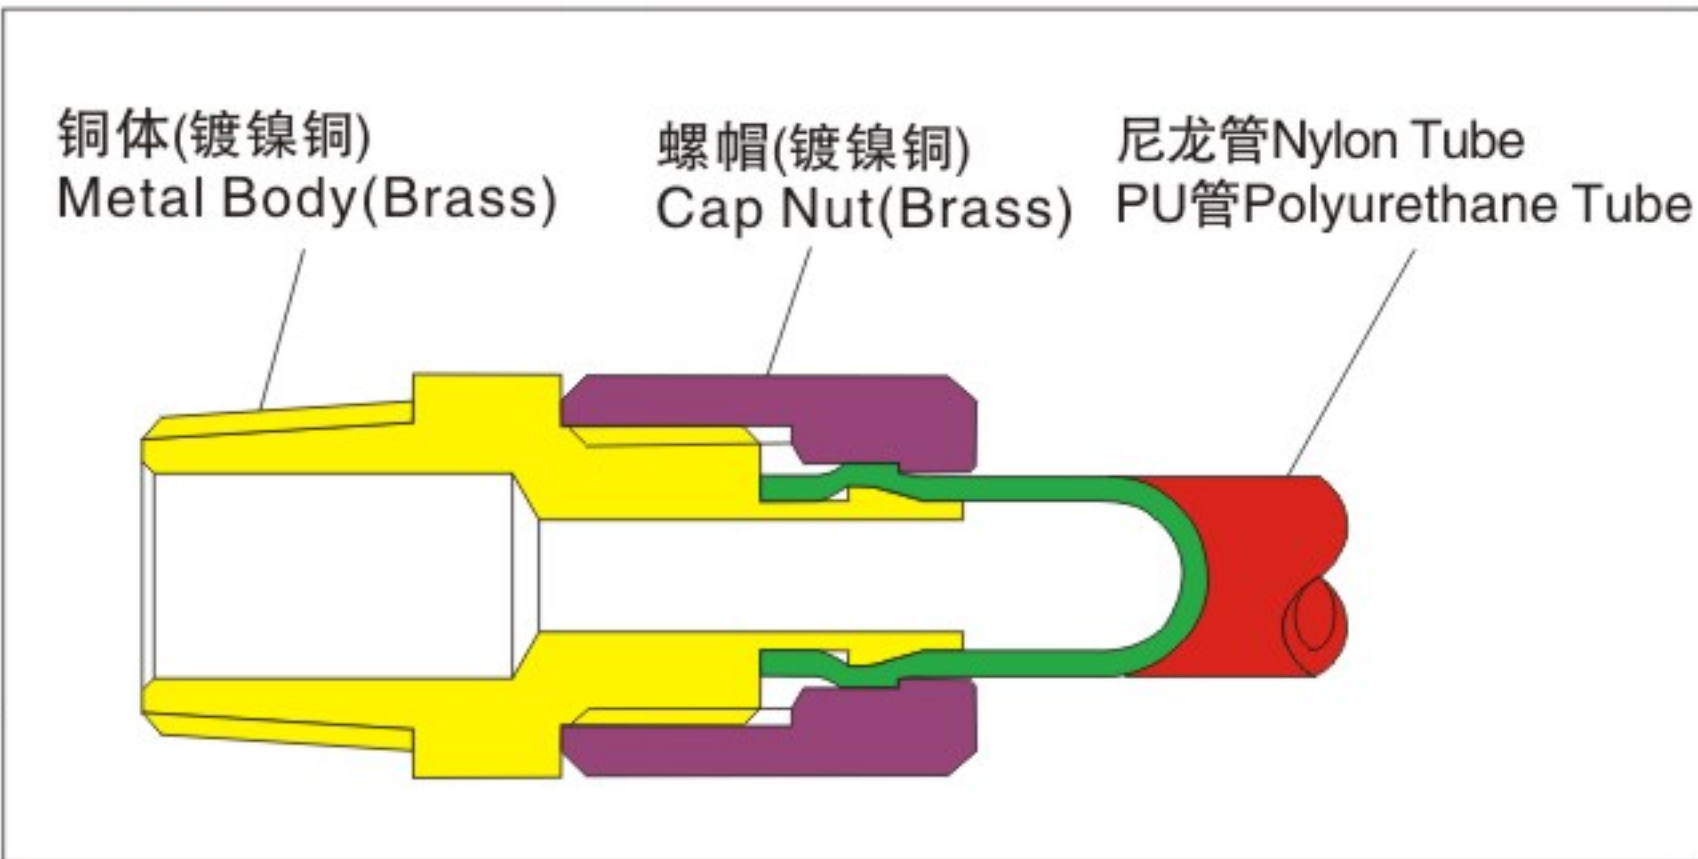

全铜卡套接头 COMPRESSION FITTINGS

KCT 终端接头



型号Model(φ D)		
管(公制)Tube (metric)		
KCT04-01	KCT08-03	KCT12-04
KCT04-02	KCT08-04	KCT14-02
KCT06-01	KCT10-01	KCT14-03
KCT06-02	KCT10-02	KCT14-04
KCT06-03	KCT10-03	KCT16-04
KCT06-04	KCT10-04	KCT16-06
KCT08-01	KCT12-02	
KCT08-02	KCT12-03	

KCFT 终端内螺纹接头



型号Model(φ D)		
管(公制)Tube (metric)		
KCFT04-01	KCFT08-03	KCFT12-04
KCFT04-02	KCFT08-04	KCFT14-02
KCFT06-01	KCFT10-01	KCFT14-03
KCFT06-02	KCFT10-02	KCFT14-04
KCFT06-03	KCFT10-03	KCFT16-04
KCFT06-04	KCFT10-04	KCFT16-06
KCFT08-01	KCFT12-02	
KCFT08-02	KCFT12-03	

KLT 直角外螺纹接头



型号Model(φ D)		
管(公制)Tube (metric)		
KLT4-01	KLT8-03	KLT12-04
KLT4-02	KLT8-04	KLT14-03
KLT6-01	KLT10-01	KLT14-04
KLT6-02	KLT10-02	KLT16-03
KLT6-03	KLT10-03	KLT16-04
KLT6-04	KLT10-04	KLT16-06
KLT8-01	KLT12-02	
KLT8-02	KLT12-03	

KLFT 直角内螺纹接头




型号Model(φ D)		
管(公制)Tube (metric)		
KLFT4-01	KLFT8-03	KLFT12-04
KLFT4-02	KLFT8-04	KLFT14-03
KLFT6-01	KLFT10-01	KLFT14-04
KLFT6-02	KLFT10-02	KLFT16-03
KLFT6-03	KLFT10-03	KLFT16-04
KLFT6-04	KLFT10-04	KLFT16-06
KLFT8-01	KLFT12-02	
KLFT8-02	KLFT12-03	

BCT 直角终端接头



型号Model(φ D)	
管(公制)Tube (metric)	
BCT04-M5	BCT10-02
BCT04-01	BCT10-03
BCT04-02	BCT10-04
BCT04-03	BCT12-01
BCT04-04	BCT12-02
BCT06-M5	BCT12-03
BCT06-01	BCT12-04
BCT06-02	BCT14-03
BCT06-03	BCT14-04
BCT06-04	BCT16-03
BCT08-01	BCT16-04
BCT08-02	BCT16-06
BCT08-03	
BCT08-04	
BCT10-01	

BCFT 直通终端内螺纹接头

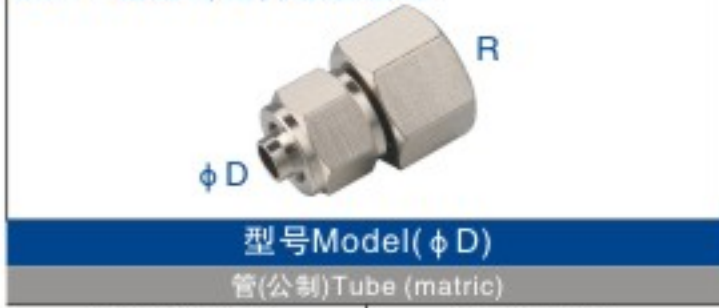

型号Model(φ D)	
管(公制)Tube (metric)	
BCFT04-M5	BCFT10-02
BCFT04-01	BCFT10-03
BCFT04-02	BCFT10-04
BCFT04-03	BCFT12-01
BCFT04-04	BCFT12-02
BCFT06-M5	BCFT12-03
BCFT06-01	BCFT12-04
BCFT06-02	BCFT14-03
BCFT06-03	BCFT14-04
BCFT06-04	BCFT16-03
BCFT08-01	BCFT16-04
BCFT08-02	BCFT16-06
BCFT08-03	
BCFT08-04	
BCFT10-01	

BLT 直角外螺纹接头



型号Model(φ D)	
管(公制)Tube (metric)	
BLT04-M5	BLT10-02
BLT04-01	BLT10-03
BLT04-02	BLT10-04
BLT04-03	BLT12-01
BLT04-04	BLT12-02
BLT06-M5	BLT12-03
BLT06-01	BLT12-04
BLT06-02	BLT14-03
BLT06-03	BLT14-04
BLT06-04	BLT16-03
BLT08-01	BLT16-04
BLT08-02	BLT16-06
BLT08-03	
BLT08-04	
BLT10-01	

BLFT 直角内螺纹接头



型号Model(φ D)	
管(公制)Tube (metric)	
BLFT04-M5	BLFT10-02
BLFT04-01	BLFT10-03
BLFT04-02	BLFT10-04
BLFT04-03	BLFT12-01
BLFT04-04	BLFT12-02
BLFT06-M5	BLFT12-03
BLFT06-01	BLFT12-04
BLFT06-02	BLFT14-03
BLFT06-03	BLFT14-04
BLFT06-04	BLFT16-03
BLFT08-01	BLFT16-04
BLFT08-02	BLFT16-06
BLFT08-03	
BLFT08-04	
BLFT10-01	

BBT 三通中部螺纹接头



型号Model(φ D)	
管(公制)Tube (metric)	
BBT04-M5	BBT10-02
BBT04-01	BBT10-03
BBT04-02	BBT10-04
BBT04-03	BBT12-01
BBT04-04	BBT12-02
BBT06-M5	BBT12-03
BBT06-01	BBT12-04
BBT06-02	BBT14-03
BBT06-03	BBT14-04
BBT06-04	BBT16-03
BBT08-01	BBT16-04
BBT08-02	BBT16-06
BBT08-03	
BBT08-04	
BBT10-01	

BDT 三通边部螺纹接头



型号Model(φ D)	
管(公制)Tube (metric)	
BDT04-M5	BDT10-01
BDT04-01	BDT10-02
BDT04-02	BDT10-03
BDT04-03	BDT10-04
BDT04-04	BDT12-01
BDT06-M5	BDT12-02
BDT06-01	BDT12-03
BDT06-02	BDT12-04
BDT06-03	BDT14-03
BDT06-04	BDT14-04
BDT08-01	BDT16-03
BDT08-02	BDT16-04
BDT08-03	BDT16-06
BDT08-04	

KBT 三通中部螺纹



型号Model(φ D)		
管(公制)Tube (metric)		
KBT04-01	KBT08-03	KBT12-04
KBT04-02	KBT08-04	KBT14-03
KBT06-01	KBT10-01	KBT14-04
KBT06-02	KBT10-02	KBT16-03
KBT06-03	KBT10-03	KBT16-04
KBT06-04	KBT10-04	KBT16-06
KBT08-01	KBT12-02	
KBT08-02	KBT12-03	

KDT 三通边部螺纹



型号Model(φ D)		
管(公制)Tube (metric)		
KDT04-01	KDT08-03	KDT12-04
KDT04-02	KDT08-04	KDT14-03
KDT06-01	KDT10-01	KDT14-04
KDT06-02	KDT10-02	KDT16-03
KDT06-03	KDT10-03	KDT16-04
KDT06-04	KDT10-04	KDT16-06
KDT08-01	KDT12-02	
KDT08-02	KDT12-03	

KGT 直通变径



型号Model(φ D)	
管(公制)Tube (metric)	
KGT06-04	KMMT04-04
KGT08-06	KMMT06-06
KGT10-08	KMMT08-08
KGT12-10	KMMT10-10
KGT14-12	KMMT12-12
KGT16-14	KMMT14-14
	KMMT16-16

KMMT 穿板接头



型号Model(φ D)	
管(公制)Tube (metric)	
	KMMT04-04
	KMMT06-06
	KMMT08-08
	KMMT10-10
	KMMT12-12
	KMMT14-14
	KMMT16-16

BSCT 单向调速阀



型号Model(φ D)	
管(公制)Tube (metric)	
BSCT4-M5	BSCT10-04
BSCT4-01	BSCT12-01
BSCT4-02	BSCT12-02
BSCT6-M5	BSCT12-03
BSCT6-01	BSCT12-04
BSCT6-02	BSCT14-03
BSCT6-03	BSCT14-04
BSCT6-04	BSCT16-03
BSCT8-01	BSCT16-04
BSCT8-02	BSCT16-06
BSCT8-03	
BSCT8-04	
BSCT10-01	
BSCT10-02	
BSCT10-03	

BMMT 直通穿板接头



型号Model(φ D)	
管(公制)Tube (metric)	
BMMT04-04	
BMMT06-06	
BMMT08-08	
BMMT10-10	
BMMT12-12	
BMMT14-14	
BMMT16-16	

BET 三通



型号Model(φ D)	
管(公制)Tube (metric)	
BET04-04-04	
BET06-06-06	
BET08-08-08	
BET10-10-10	
BET12-12-12	
BET14-14-14	
BET16-16-16	

BUT 直通接头



型号Model(φ D)	
管(公制)Tube (metric)	
BUT04-04	
BUT06-06	
BUT08-08	
BUT10-10	
BUT12-12	
BUT14-14	
BUT16-16	

BVT 直通接头



型号Model(φ D)	
管(公制)Tube (metric)	
BVT04-04	
BVT06-06	
BVT08-08	
BVT10-10	
BVT12-12	
BVT14-14	
BVT16-16	

BZRT 四通螺纹接头



型号Model(φ D)	
管(公制)Tube (metric)	
BZRT04-M5	BZRT10-02
BZRT04-01	BZRT10-03
BZRT04-02	BZRT10-04
BZRT04-03	BZRT12-01
BZRT04-04	BZRT12-02
BZRT06-M5	BZRT12-03
BZRT06-01	BZRT12-04
BZRT06-02	BZRT14-03
BZRT06-03	BZRT14-04
BZRT06-04	BZRT16-03
BZRT08-01	BZRT16-04
BZRT08-02	BZRT16-06
BZRT08-03	
BZRT08-04	
BZRT10-01	

KUT 直通接头



型号Model(φ D)	
管(公制)Tube (metric)	
PUT04-04	
PUT06-06	
PUT08-08	
PUT10-10	
PUT12-12	
PUT14-14	
PUT16-16	

KET 三通接头



型号Model(φ D)	
管(公制)Tube (metric)	
KET04-04-04	
KET06-06-06	
KET08-08-08	
KET10-10-10	
KET12-12-12	
KET14-14-14	
KET16-16-16	

KVT 直角接头




型号Model(φ D)	
管(公制)Tube (metric)	
	KVT04-04
	KVT06-06
	KVT08-08
	KVT10-10
	KVT12-12
	KVT14-14
	KVT16-16

宝塔式系列管接头 THE PAGODA TYPE SERIES PIPE JOINT

管径		$\phi 4 \times \phi 2.5$	$\phi 6 \times \phi 4$	$\phi 8 \times \phi 5.5$	$\phi 10 \times \phi 6.5$	$\phi 12 \times \phi 8$	$\phi 14 \times \phi 10$	$\phi 16 \times \phi 12$
使用流体		空气						
保证耐压力		10(1000)						
保证真空压力		-100KPa(10Torr)						
使用温度范围		5~80						
材料	主体	黄铜(镀镍)						
连接口径Rc(PT)		M5×0.8P 1/8 " 1/4 " 3/8 " 1/2 "						
牙部涂胶		附涂胶印						

(一)YPB-系列宝塔式管接头, 适用于连接软质尼龙管, 塑料管及胶管。
(二)将卡箍先套在气管上, 在外宝塔锥头端外涂适量润滑油, 再插入气管, 锁紧卡箍。
用户如需要其他螺纹规格的请订货时指明。

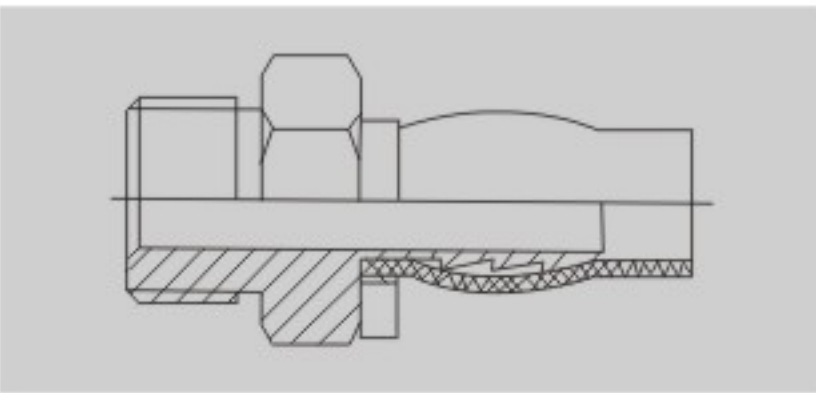

ECT 终端接头	
	
型号Model(ϕ D)	
管(公制)Tube (matric)	
ECT04-M5	ECT10-04
ECT04-01	ECT12-01
ECT04-02	ECT12-02
ECT06-M5	ECT12-03
ECT06-01	ECT12-04
ECT06-02	ECT14-03
ECT06-03	ECT14-04
ECT06-04	ECT16-03
ECT08-01	ECT16-04
ECT08-02	ECT16-06
ECT08-03	ECT20-03
ECT08-04	ECT20-04
ECT10-01	
ECT10-02	
ECT10-03	

ECFT 终端内螺纹接头	
	
型号Model(ϕ D)	
管(公制)Tube (matric)	
ECFT04-M5	ECFT10-04
ECFT04-01	ECFT12-01
ECFT04-02	ECFT12-02
ECFT06-M5	ECFT12-03
ECFT06-01	ECFT12-04
ECFT06-02	ECFT14-03
ECFT06-03	ECFT14-04
ECFT06-04	ECFT16-03
ECFT08-01	ECFT16-04
ECFT08-02	ECFT16-06
ECFT08-03	
ECFT08-04	
ECFT10-01	
ECFT10-02	
ECFT10-03	

EUT 直通接头	
	
型号Model(ϕ D)	
管(公制)Tube (matric)	
EUT-04	
EUT-06	
EUT-08	
EUT-10	
EUT-12	
EUT-14	
EUT-16	


EET 三通接头	
	
型号Model(ϕ D)	
管(公制)Tube (matric)	
EET-04	
EET-06	
EET-08	
EET-10	
EET-12	
EET-14	
EET-16	

ELT 直角外螺纹接头	
	
型号Model(ϕ D)	
管(公制)Tube (matric)	
4-M5	10-04
4-01	12-01
4-02	12-02
6-M5	12-03
6-01	12-04
6-02	14-02
6-03	14-03
6-04	14-04
8-01	16-04
8-02	16-06
8-03	20-03
8-04	20-04
10-01	
10-02	
10-03	

EDT 三通中部螺纹接头	
	
型号Model(ϕ D)	
管(公制)Tube (matric)	
EDT4-M5	EDT10-04
EDT4-01	EDT12-01
EDT4-02	EDT12-02
EDT6-M5	EDT12-03
EDT6-01	EDT12-04
EDT6-02	EDT14-03
EDT6-03	EDT14-04
EDT6-04	EDT16-03
EDT8-01	EDT16-04
EDT8-02	EDT16-06
EDT8-03	
EDT8-04	
EDT10-01	
EDT10-02	
EDT10-03	

EZAT 四通管接头	
	
型号Model(ϕ D)	
管(公制)Tube (matric)	
EZAT-04	
EZAT-06	
EZAT-08	
EZAT-10	
EZAT-12	
EZAT-14	
EZAT-16	

四通内螺纹	
	
型号Model(ϕ D)	
管(公制)Tube (matric)	
G01	N01
G02	N02
G03	N03
G04	N04

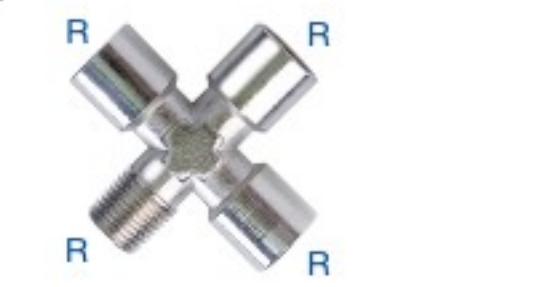四通边部外螺纹	
	
型号Model(ϕ D)	
管(公制)Tube (matric)	
01	N01
02	N02
03	N03
04	N04

Y型内螺纹	
	
型号Model(ϕ D)	
管(公制)Tube (matric)	
G01	N01
G02	N02
G03	N03
G04	N04

Y型边部外螺纹	
	
型号Model(ϕ D)	
管(公制)Tube (matric)	
01	N01
02	N02
03	N03
04	N04

通用附件(全铜镀镍) PIPE FITTINGS



J型弯头外螺

型号Model(ϕ D)
管(公制)Tube (matric)
G1/8
G1/4
G3/8
G1/2



T型三通内螺

型号Model(ϕ D)
管(公制)Tube (matric)
G1/8
G1/4
G3/8
G1/2



YM堵头

型号Model(ϕ D)
管(公制)Tube (matric)
M5
G1/8
G1/4
G3/8
G1/2
G3/4
G1



YJ内外螺

型号Model(ϕ D)
管(公制)Tube (matric)
G1/8-M5
G1/4-G1/8
G3/8-G1/4
G1/2-G3/8
G3/4-G1/2
G1-G3/4



堵头

型号Model(ϕ D)
管(公制)Tube (matric)
M5
G1/8
G1/4
G3/8
G1/2
G3/4
G1



YD直通内螺

型号Model(ϕ D)
管(公制)Tube (matric)
M5-M5
G1/8-G1/8
G1/4-G1/4
G3/8-G3/8
G1/2-G1/2
G3/4-G3/4
G1-G1



LY直接外螺

型号Model(ϕ D)
管(公制)Tube (matric)
M5-M5
G1/8-G1/8
G1/4-G1/4
G3/8-G3/8
G1/2-G1/2
G3/4-G3/4
G1-G1



YB直通内外螺纹接头

型号Model(ϕ D)
管(公制)Tube (matric)
M5-G1/8
G1/8-G1/4
G1/4-G3/8
G3/8-G1/2
G1/2-G3/4
G3/4-G1



双外螺针阀

型号Model(ϕ D)
管(公制)Tube (matric)
G1/8
G1/4
内螺G1/8
内螺G1/4



卡套式针阀

型号Model(ϕ D)
管(公制)Tube (matric)
YPK-6
YPK-8

88系列 88SERIES SPRING SEALING FITTINGS



8820外螺纹

型号Model(φ D)
管(公制)Tube (metric)
8820-09
8820-13
8820-17
8820-21



8821内螺纹

型号Model(φ D)
管(公制)Tube (metric)
8821-09
8821-13
8821-17
8821-21



8822宝塔式

型号Model(φ D)
管(公制)Tube (metric)
8822-06
8822-08
8822-10
8822-12



8823快拧式

型号Model(φ D)
管(公制)Tube (metric)
8823-04
8823-06
8823-08



8825外插式

型号Model(φ D)
管(公制)Tube (metric)
8825-06
8825-08
8825-10



8810外螺纹丝插咀

型号Model(φ D)
管(公制)Tube (metric)
8810-09
8810-13
8810-17
8810-21



8811内螺丝插咀

型号Model(φ D)
管(公制)Tube (metric)
8811-09
8811-13
8811-17
8811-21



8812宝塔式插咀

型号Model(φ D)
管(公制)Tube (metric)
8812-06
8812-08
8812-10
8812-12



8813快拧式插咀

型号Model(φ D)
管(公制)Tube (metric)
8813-04
8813-06
8813-08



8815外插入插咀

型号Model(φ D)
管(公制)Tube (metric)
8815-06
8815-08
8815-10

全铜快插式塑料按钮气动管接头 BRASS FITTINGS WITH PLASTIC SLEEVE



型号Model(φ D)
管(公制)Tube (metric)
PCP04-01
PCP04-02
PCP06-01
PCP06-02
PCP08-01
PCP08-02
PCP08-03
PCP10-02
PCP10-03
PCP10-04
PCP12-02
PCP12-03
PCP12-04



型号Model(φ D)
管(公制)Tube (metric)
PLP04-01
PLP04-02
PLP06-01
PLP06-02
PLP08-01
PLP08-02
PLP08-03
PLP10-02
PLP10-03
PLP10-04
PLP12-02
PLP12-03
PLP12-04



型号Model(φ D)
管(公制)Tube (metric)
PCP04-M5
PCP04-G01
PCP04-G02
PCP06-GM5
PCP06-G01
PCP06-G02
PCP08-G01
PCP08-G02
PCP08-G03
PCP10-G02
PCP10-G03
PCP10-G04
PCP12-G02
PCP12-G03
PCP12-G04



型号Model(φ D)
管(公制)Tube (metric)
PLP04-M5
PLP04-G01
PLP04-G02
PLP06-M5
PLP06-G01
PLP06-G02
PLP08-G01
PLP08-G02
PLP08-G03
PLP10-G02
PLP10-G03
PLP10-G04
PLP12-G02
PLP12-G03
PLP12-G04



型号Model(φ D)
管(公制)Tube (metric)
PHP04-G01
PHP06-G01
PHP06-G02
PHP08-G01
PHP08-G02
PHP08-G03
PHP10-G02
PHP10-G03
PHP10-G03
PHP10-G04
PHP12-G02
PHP12-G03
PHP12-G04



型号Model(φ D)
管(公制)Tube (metric)
PBP04-G01
PBP04-G02
PBP06-G01
PBP06-G02
PBP08-G01
PBP08-G02
PBP08-G03
PBP10-G02
PBP10-G03
PBP10-G04
PBP12-G02
PBP12-G03
PBP12-G04



型号Model(φ D)
管(公制)Tube (metric)
PBP04-M5
PBP04-G01
PBP04-G02
PBP06-M5
PBP06-G01
PBP06-G02
PBP08-G01
PBP08-G02
PBP08-G03
PBP10-G02
PBP10-G03
PBP10-G04
PBP12-G02
PBP12-G03
PBP12-G04



型号Model(φ D)
管(公制)Tube (metric)
PDP04-01
PDP04-02
PDP06-01
PDP06-02
PDP08-01
PDP08-02
PDP08-03
PDP10-02
PDP10-03
PDP10-04
PDP12-02
PDP12-03
PDP12-04




型号Model(φ D)
管(公制)Tube (metric)
PDP04-M5
PDP04-G01
PDP04-G02
PDP06-M5
PDP06-G01
PDP06-G02
PDP08-G01
PDP08-G02
PDP08-G03
PDP10-G02
PDP10-G03
PDP10-G04
PDP12-G02
PDP12-G03
PDP12-G04



型号Model(φ D)
管(公制)Tube (metric)
PVP04
PVP06
PVP08
PVP10
PVP12



型号Model(φ D)
管(公制)Tube (metric)
PUP04
PUP06
PUP08
PUP10
PUP12

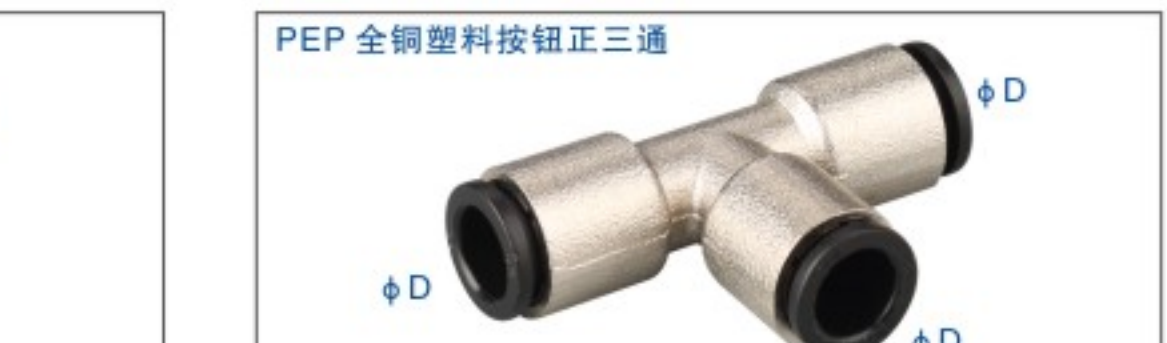

型号Model(φ D)
管(公制)Tube (metric)
PMP04
PMP06
PMP08
PMP10
PMP12

快速接头 ONE-TOUCH FITTINGS

特点 One-touch Tube Fittings

主题是可转向的结构，所以提高了铺设关系的效率。(PL,PH,PB等型号)
随着螺纹及连接管径的不同，规格也不同。
PC螺纹内测有六角扳手孔，所以即使在狭窄处安装也十分容易。
螺纹处有O型圈或密封胶，所以不用密封处理就可以直接安装。

使用范围说明 Specifications

使用流体	Air(No other gases or liquids)	
使用压力	0~150PSI	0~10Kg/cm²(0~1000kPa)
负压	-29.5in Hg	-750mmHg(10Torr)
使用温度范围	32~140° F	-10~60℃
使用气管种类	Polyurethane and nylon	

产品标识形色 Product code system

J	PC	08	-	02
①	②	③		

- ① 江淮
② 型号
③ 管径大小(D)

	Metric aize						Lnce size					
Code	04	06	08	10	12	16	5/32	3/16	1/4	5/16	3/8	1/2
Dia	4	6	8	10	12	16	5/32	3/16	1/4	5/16	3/8	1/2


④ 螺纹规格

*Metric thread & R(PT)thread						
	Metric aize			Taper pipe thread		
Code	M5	M6	01	02	03	04
Size	M5×0.8	M6×1.0	R1/8	R1/4	R3/8	R1/2

*Inch thread (NUF & NPT)					
	Unified fine thread		American standard taper pipe thread		
Code	U10U	U01U	U02U	U03U	U04U
Size	10-32UNF	NPT1/8	NPT1/4	NPT3/8	NPT1/2



结构图 Structural diagram

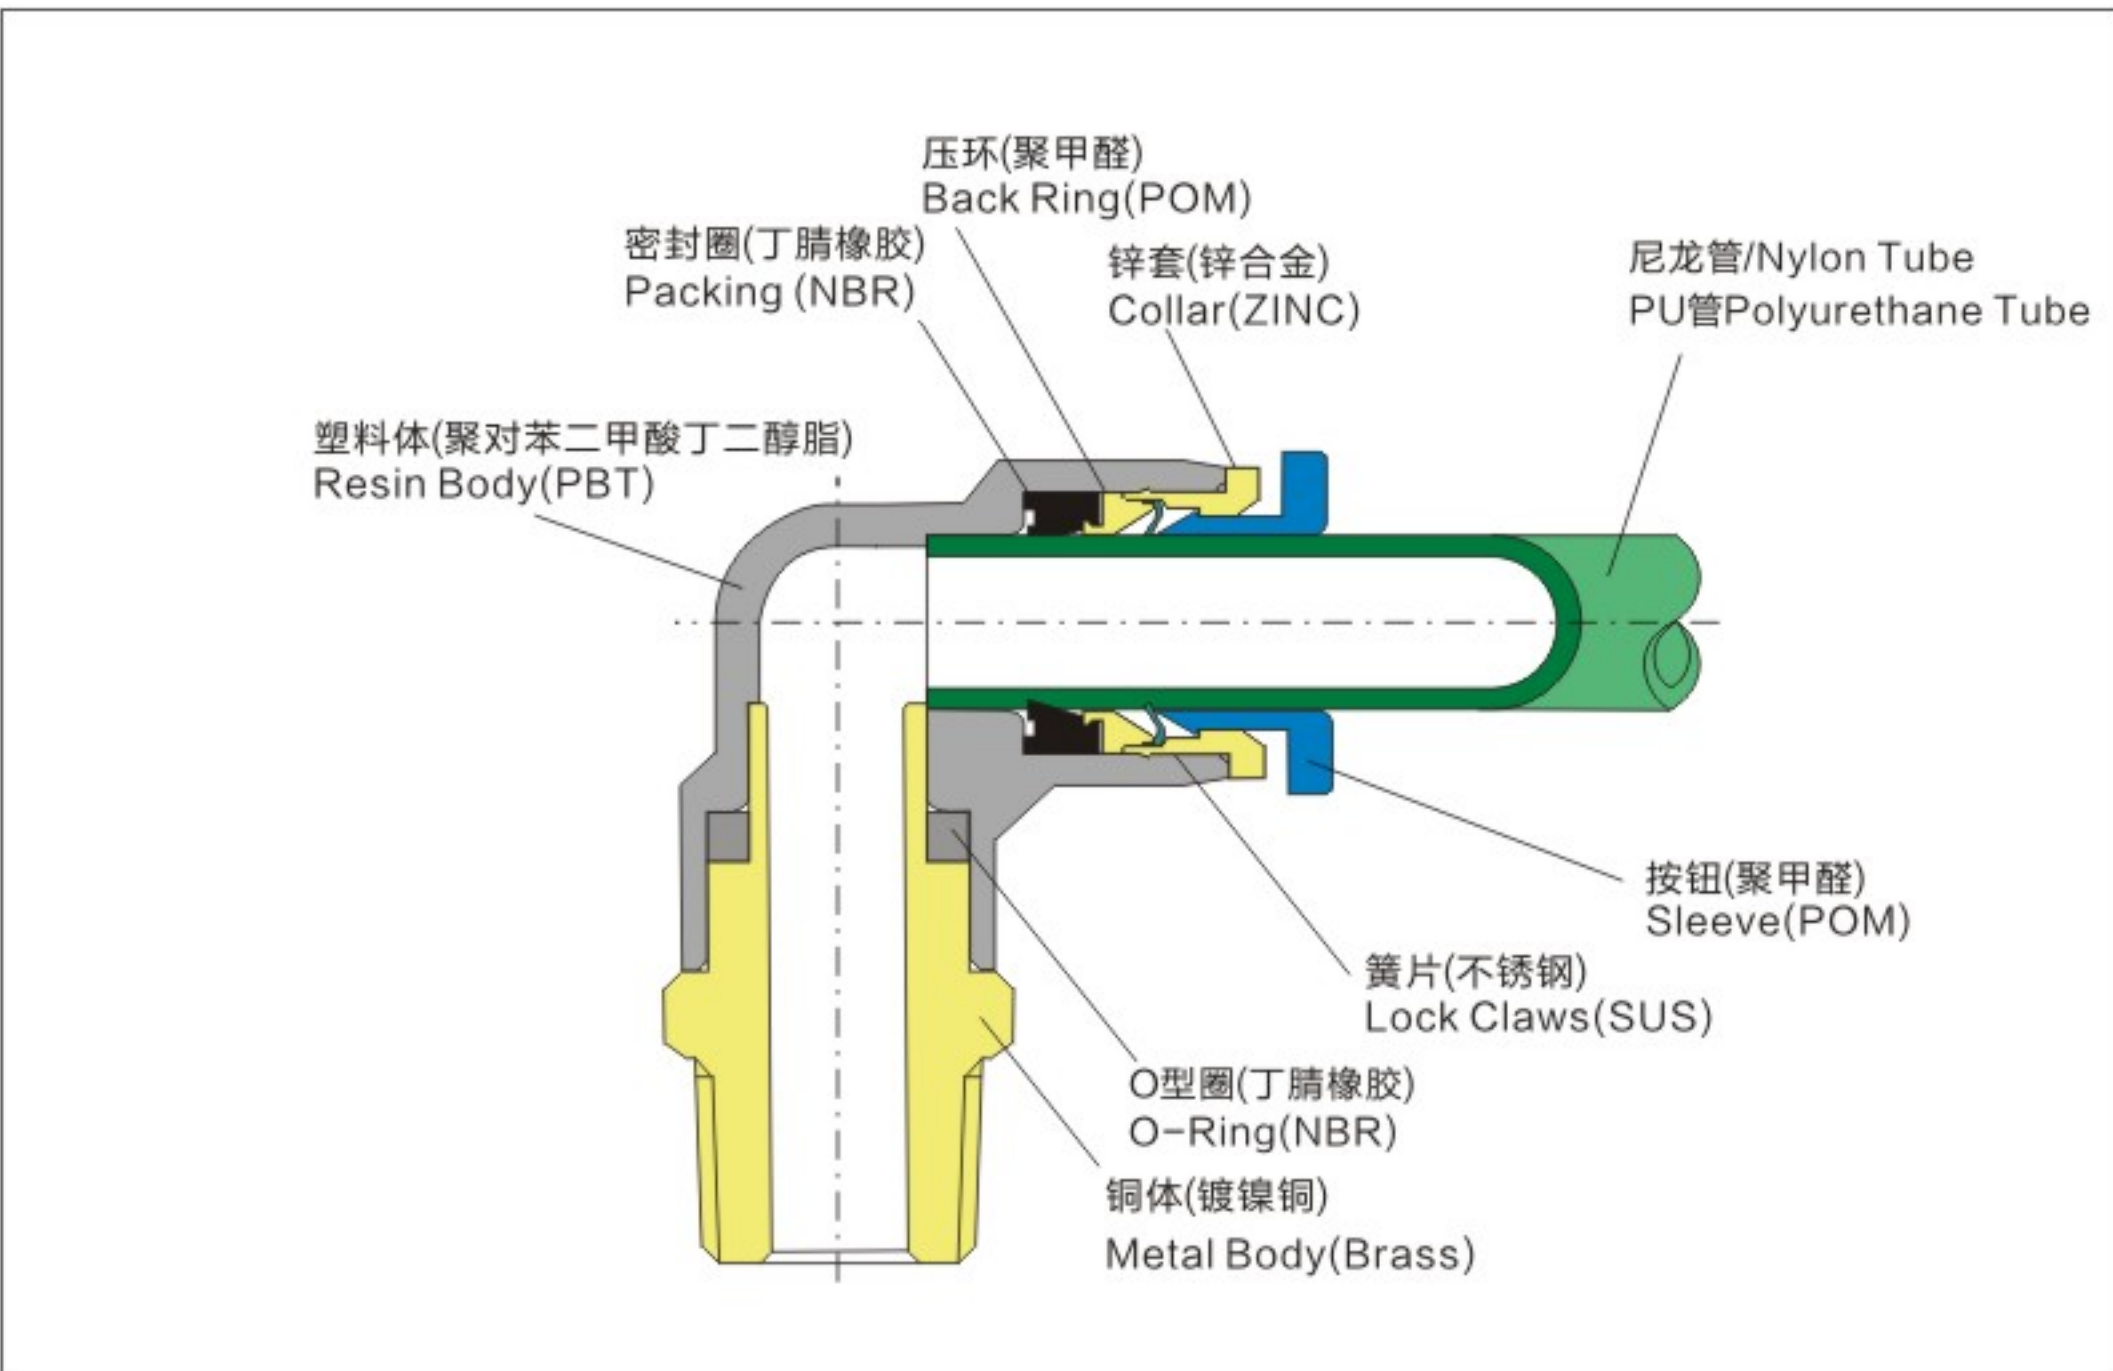

快速接头 ONE-TOUCH FITTINGS

JPC 螺纹六角直通 Male straight

R

φ D

型号Model(φ D)

管(公制)Tube (metric)

JPC04-M5	JPC10-01	JPC14/4-01
JPC04-M6	JPC10-02	JPC14/4-02
JPC04-01	JPC10-03	JPC14/4-03
JPC04-02	JPC10-04	JPC15/16-01
JPC04-03	JPC12-01	JPC15/16-02
JPC06-M5	JPC12-02	JPC15/16-03
JPC06-M6	JPC12-03	JPC15/16-04
JPC06-01	JPC12-04	JPC15/16-05
JPC06-02	JPC14-02	JPC15/16-06
JPC06-03	JPC14-03	JPC15/16-07
JPC06-04	JPC14-04	JPC12/2-02
JPC08-01	JPC16-02	JPC12/2-03
JPC08-02	JPC16-03	JPC12/2-04
JPC08-03	JPC16-04	
JPC08-04	JPC16-06	

截止阀 STOP FITTINGS

特点 Features

截止阀接头在连接管子时可以双流通气体，
如果拔出管子就截止空气流通，
可以保证机械维修的安全。
截止阀接头只有在插进管子才通压缩空气。

使用范围说明 Specifications

使用流体	Air(No other gases or liquids)	
使用压力	0~150PSI	0~10Kg/cm²(0~1000kPa)
使用温度范围	32~140° F	-10~60℃
使用气管种类	Polyurethane and nylon	

产品标识形色 Product code system

J	SPC	06	-	01
①	②	③		④


①江淮 ②型号 ③管径大小(φD)

	Metric aize					Lnce size					
Code	04	06	08	10	12	5/32	3/16	1/4	5/16	3/8	1/2
Dia	φ 4	φ 6	φ 8	φ 10	φ 12	φ 5/32	φ 3/16	φ 1/4	φ 5/16	φ 3/8	φ 1/2

④螺纹规格

*Metric thread & R(PT)thread						
	Metric aize		Taper pipe thread			
Code	M5	M6	01	02	03	04
Size	M5×0.8	M6×1.0	R1/8	R1/4	R3/8	R1/2

结构图 Structural diagram

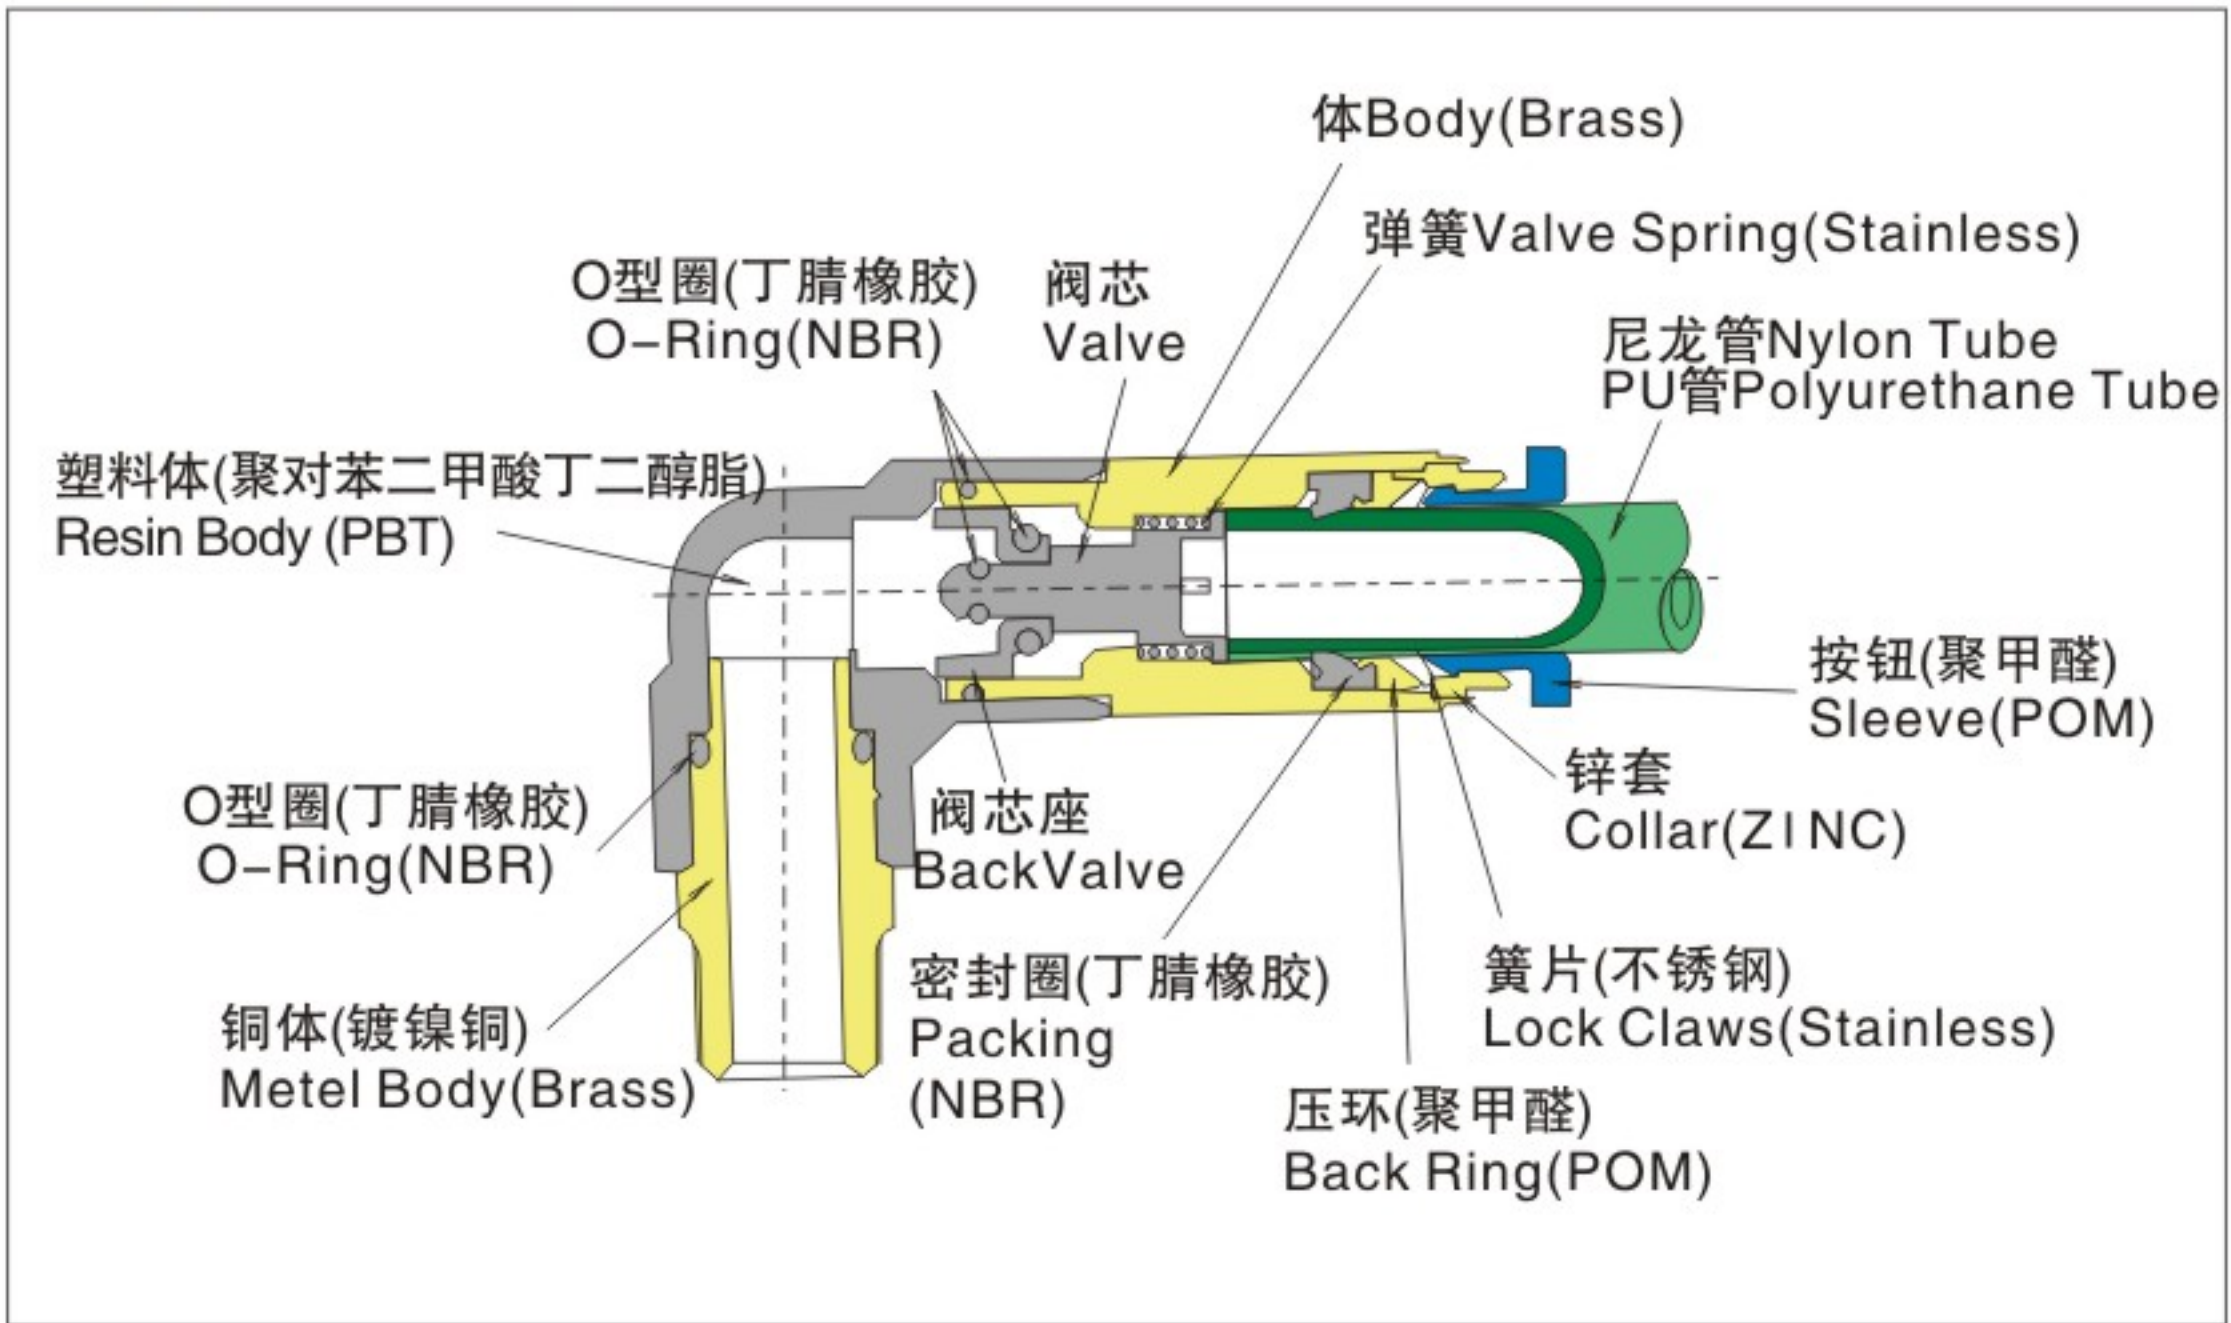

*Inch thread (NUF & NPT)					
	Unified fine thread		American standard taper pipe thread		
Code	U10U		U01U	U02U	U03U
Size	10-32UNF		NPT1/8	NPT1/4	NPT3/8

JSPC 直通截止阀 Straight		
型号Model(φD)		
管(公制)Tube (metric)		
JSPC04-M5	JSPC08-01	JSPC12-01
JSPC04-01	JSPC08-02	JSPC12-02
JSPC04-02	JSPC08-03	JSPC12-03
JSPC06-M5	JSPC08-04	JSPC12-04
JSPC06-01	JSPC10-01	JSPC16-02
JSPC06-02	JSPC10-02	JSPC16-03
JSPC06-03	JSPC10-03	JSPC16-04
JSPC06-04	JSPC10-04	

JSPL L型截止阀 Elbow		
型号Model(φD)		
管(公制)Tube (metric)		
JSPL04-M5	JSPL08-01	JSPL12-01
JSPL04-01	JSPL08-02	JSPL12-02
JSPL04-02	JSPL08-03	JSPL12-03
JSPL06-M5	JSPL08-04	JSPL12-04
JSPL06-01	JSPL10-01	JSPL16-02
JSPL06-02	JSPL10-02	JSPL16-03
JSPL06-03	JSPL10-03	JSPL16-04
JSPL06-04	JSPL10-04	

JSPC-G 直通截止阀 Straight		
型号Model(φD)		
管(公制)Tube (metric)		
JSPC04-M5	JSPC08-G01	JSPC12-G01
JSPC04-G01	JSPC08-G02	JSPC12-G02
JSPC04-G02	JSPC08-G03	JSPC12-G03
JSPC06-M5	JSPC08-G04	JSPC12-G04
JSPC06-G01	JSPC10-G01	JSPC16-G02
JSPC06-G02	JSPC10-G02	JSPC16-G03
JSPC06-G03	JSPC10-G03	JSPC16-G04
JSPC06-G04	JSPC10-G04	

JSPL-G L型截止阀 Elbow		
型号Model(φD)		
管(公制)Tube (metric)		
JSPL04-M5	JSPL08-G01	JSPL12-G01
JSPL04-G01	JSPL08-G02	JSPL12-G02
JSPL04-G02	JSPL08-G03	JSPL12-G03
JSPL06-M5	JSPL08-G04	JSPL12-G04
JSPL06-G01	JSPL10-G01	JSPL16-G02
JSPL06-G02	JSPL10-G02	JSPL16-G03
JSPL06-G03	JSPL10-G03	JSPL16-G04
JSPL06-G04	JSPL10-G04	

JSPU 两通截止阀 Union straight		
型号Model(φD)		
管(公制)Tube (metric)		
JSPU04		
JSPU06		
JSPU08		
JSPU10		
JSPU12		
JSPU16		

单向阀 CHECK VALVES

特点 Features

单向阀指单向流动空气，阻断逆方向的流动。
单向阀0.1Kg/cm²压力时启动。
单向阀在真空可维持1.42PSI，所以在低压状态下
可连接使用。

使用范围说明 Specifications

使用流体	Air(No other gases or liquids)	
使用压力	0~150PSI	0~10Kg/cm²(0~1000kPa)
负压	-29.5in Hg	-750mm Hg (10Torr)
使用温度范围	32~140° F	-10~60℃
使用气管种类	Polyurethane and nylon	

产品标识形色 Product code system

J	CVPC	06	-	01
①	②	③		④


①江淮 ②型号 ③管径大小(φD)

	Metric aize					Lnce size					
Code	04	06	08	10	12	5/32	3/16	1/4	5/16	3/8	1/2
Dia	φ 4	φ 6	φ 8	φ 10	φ 12	φ 5/32	φ 3/16	φ 1/4	φ 5/16	φ 3/8	φ 1/2

④螺纹规格

*Metric thread & R(PT)thread						
	Metric aize		Taper pipe thread			
Code	M5	M6	01	02	03	04
Size	M5×0.8	M6×1.0	R1/8	R1/4	R3/8	R1/2

结构图 Structural diagram

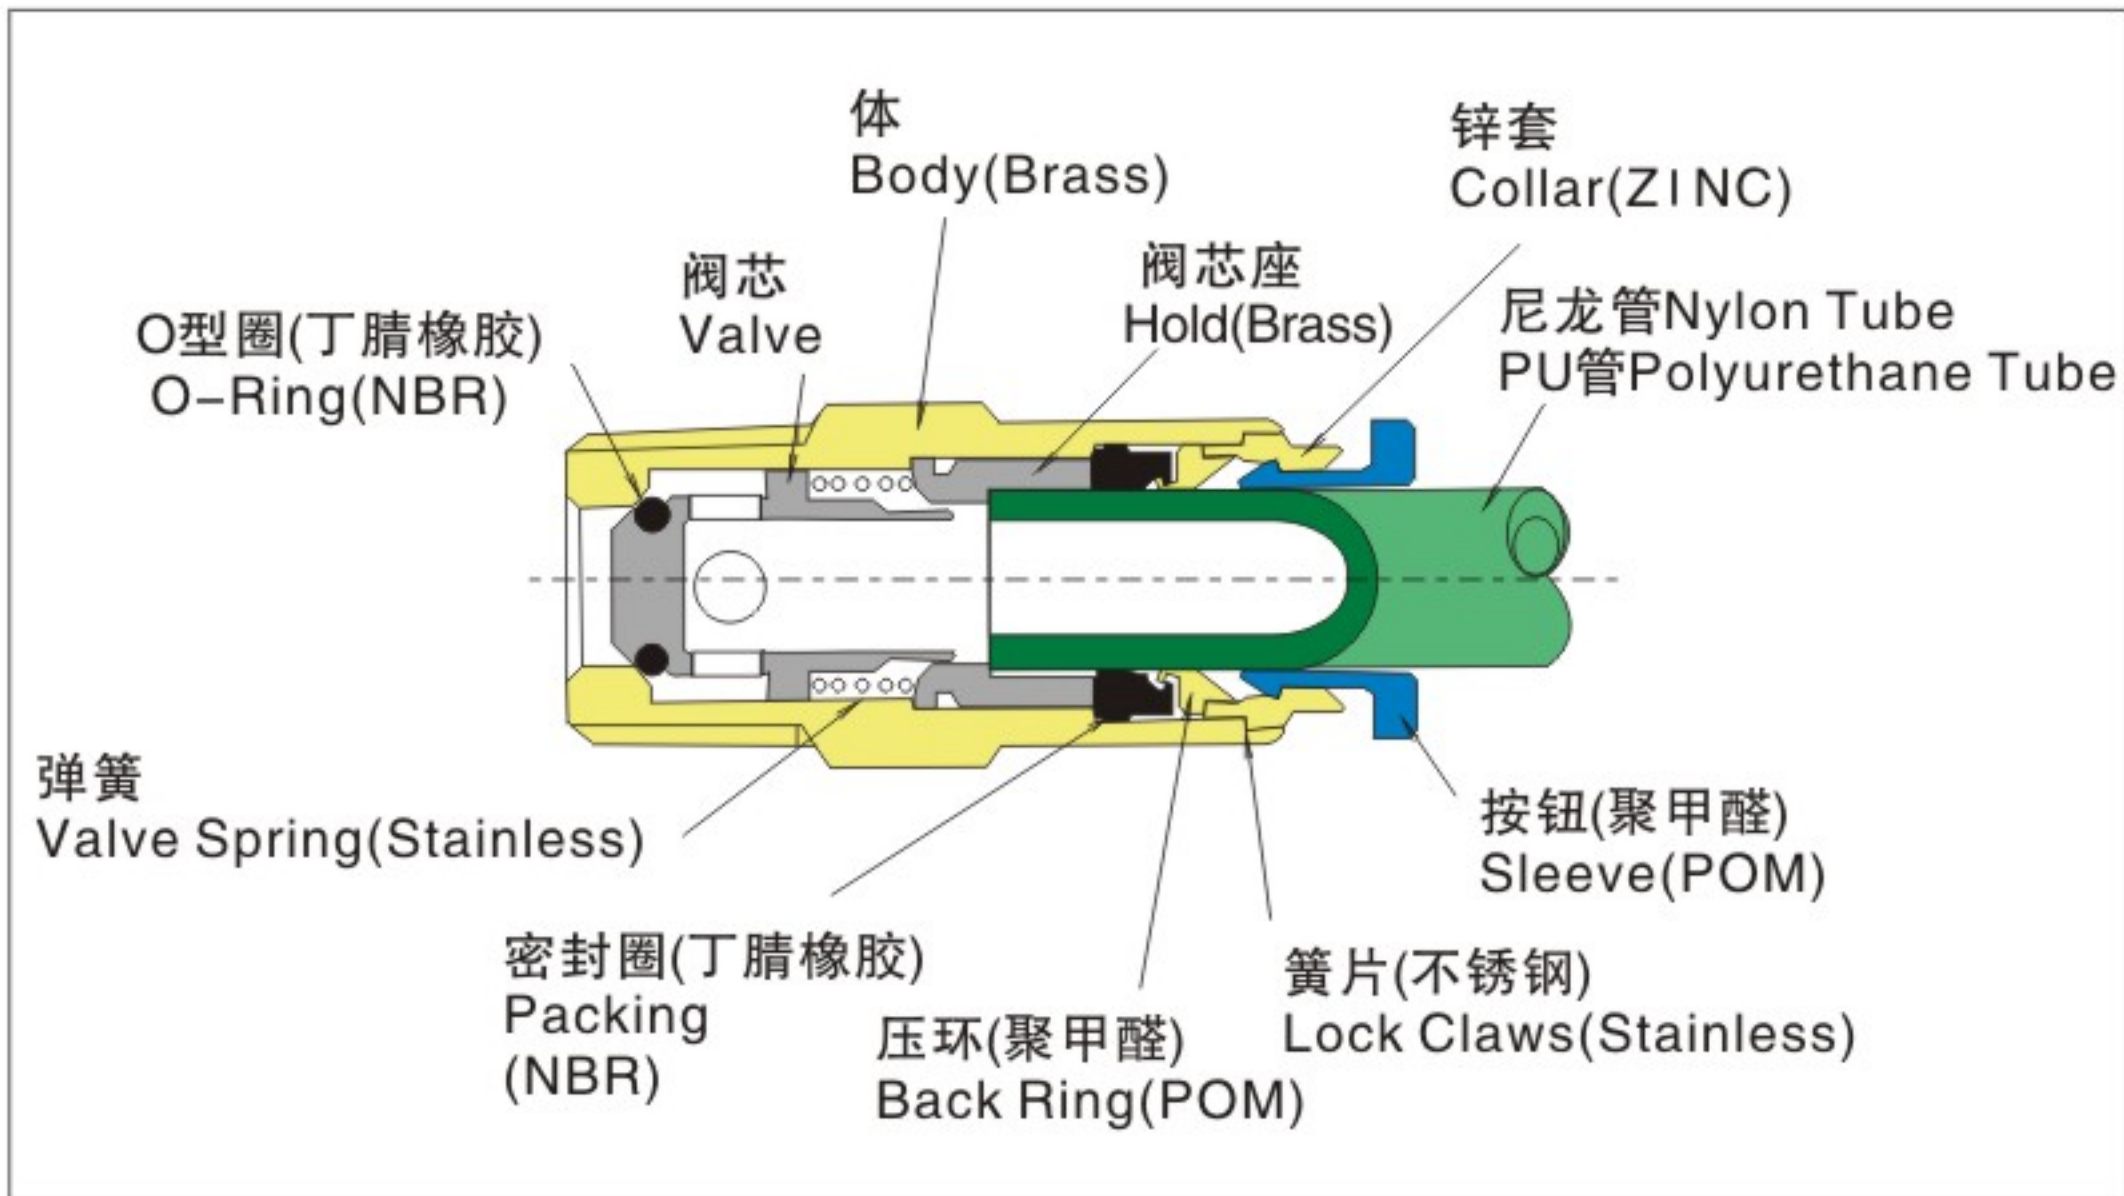

*Inch thread (NUF & NPT)					
	Unified fine thread		American standard taper pipe thread		
Code	U10U		U01U	U02U	U03U
Size	10-32UNF		NPT1/8	NPT1/4	NPT3/8

JCVPC 直通单向阀 Straight		
型号Model(φD)		
管(公制)Tube (metric)		
JCVPC04-M5	JCVPC08-01	JCVPC12-01
JCVPC04-01	JCVPC08-02	JCVPC12-02
JCVPC04-02	JCVPC08-03	JCVPC12-03
JCVPC06-M5	JCVPC08-04	JCVPC12-04
JCVPC06-01	JCVPC10-01	JCVPC16-02
JCVPC06-02	JCVPC10-02	JCVPC16-03
JCVPC06-03	JCVPC10-03	JCVPC16-04
JCVPC06-04	JCVPC10-04	

JCVPC-G 直通单向阀 Straight		
型号Model(φD)		
管(公制)Tube (metric)		
JCVPC04-M5	JCVPC08-G01	JCVPC12-G01
JCVPC04-G01	JCVPC08-G02	JCVPC12-G02
JCVPC04-G02	JCVPC08-G03	JCVPC12-G03
JCVPC06-M5	JCVPC08-G04	JCVPC12-G04
JCVPC06-G01	JCVPC10-G01	JCVPC16-G02
JCVPC06-G02	JCVPC10-G02	JCVPC16-G03
JCVPC06-G03	JCVPC10-G03	JCVPC16-G04
JCVPC06-G04	JCVPC10-G04	

JCVPU 隔板单向阀 Union Straight		
型号Model(φD)		
管(公制)Tube (metric)		
JCVPU04		
JCVPU06		
JCVPU08		
JCVPU010		
JCVPU012		
JCVPU016		

JPCVF 内外丝单向阀 Male to female		
型号Model(φD)		
管(公制)Tube (metric)		
JPCVF 01-01(B)		
JPCVF 02-02(B)		
JPCVF 03-03(B)		
JPCVF 04-04(B)		

JPCVF-G 内外丝单向阀-G Male to female		
型号Model(φD)		
管(公制)Tube (metric)		
JPCVF 01-01G(B)		
JPCVF 02-02G(B)		
JPCVF 03-03G(B)		
JPCVF 04-04G(B)		

手阀 HAND VALVES

特点 Features

手阀用于开关压缩空气
二通阀及三通阀可供选择
三通阀关闭时排出设备残余气体
多种规格和安装简单，使用方便

使用范围说明 Specifications

使用流体	Air(No other gases or liquids)	
使用压力	0~150PSI	0~10Kgf/cm ² (0~1000kPa)
负压	-29.5in Hg	-750mm Hg (10Torr)
使用温度范围	32~140° F	-10~60℃
使用气管种类	Polyurethane and nylon	

产品标识形色 Product code system

J	HVFS	06	-	01
①	②	③		④

①江淮 ②型号 ③管径大小(φD)

	Metric aize			
Code	06	08	10	12
Dia	φ 6	φ 8	φ 10	φ 12


JHVFF插管-插管 Union straight	
	
型号Model(φ D)	
管(公制)Tube (matric)	
JHVFF04-04	
JHVFF06-06	
JHVFF08-08	
JHVFF10-10	
JHVFF12-12	

JHVFS插管-螺纹 straight fitting thread	
	
型号Model(φ D)	
管(公制)Tube (matric)	
JHVFS06-01	JHVFS10-02
JHVFS06-02	JHVFS10-03
JHVFS06-03	JHVFS10-04
JHVFS08-01	JHVFS12-02
JHVFS08-02	JHVFS12-03
JHVFS08-03	JHVFS12-04

JHVSS-Nipple	
	
型号Model(φ D)	
管(公制)Tube (matric)	
JHVSS01-01	
JHVSS02-01	
JHVSS03-02	
JHVSS03-02	
JHVSS03-03	
JHVSS04-03	

JHVSF 螺纹-插管 straight Tread-Fitting	
	
型号Model(φ D)	
管(公制)Tube (matric)	
JHVSF01-06	JHVSF02-10
JHVSF02-06	JHVSF03-10
JHVSF03-06	JHVSF04-10
JHVSF01-08	JHVSF02-12
JHVSF02-08	JHVSF03-12
JHVSF03-08	JHVSF04-12

结构图 Structural diagram

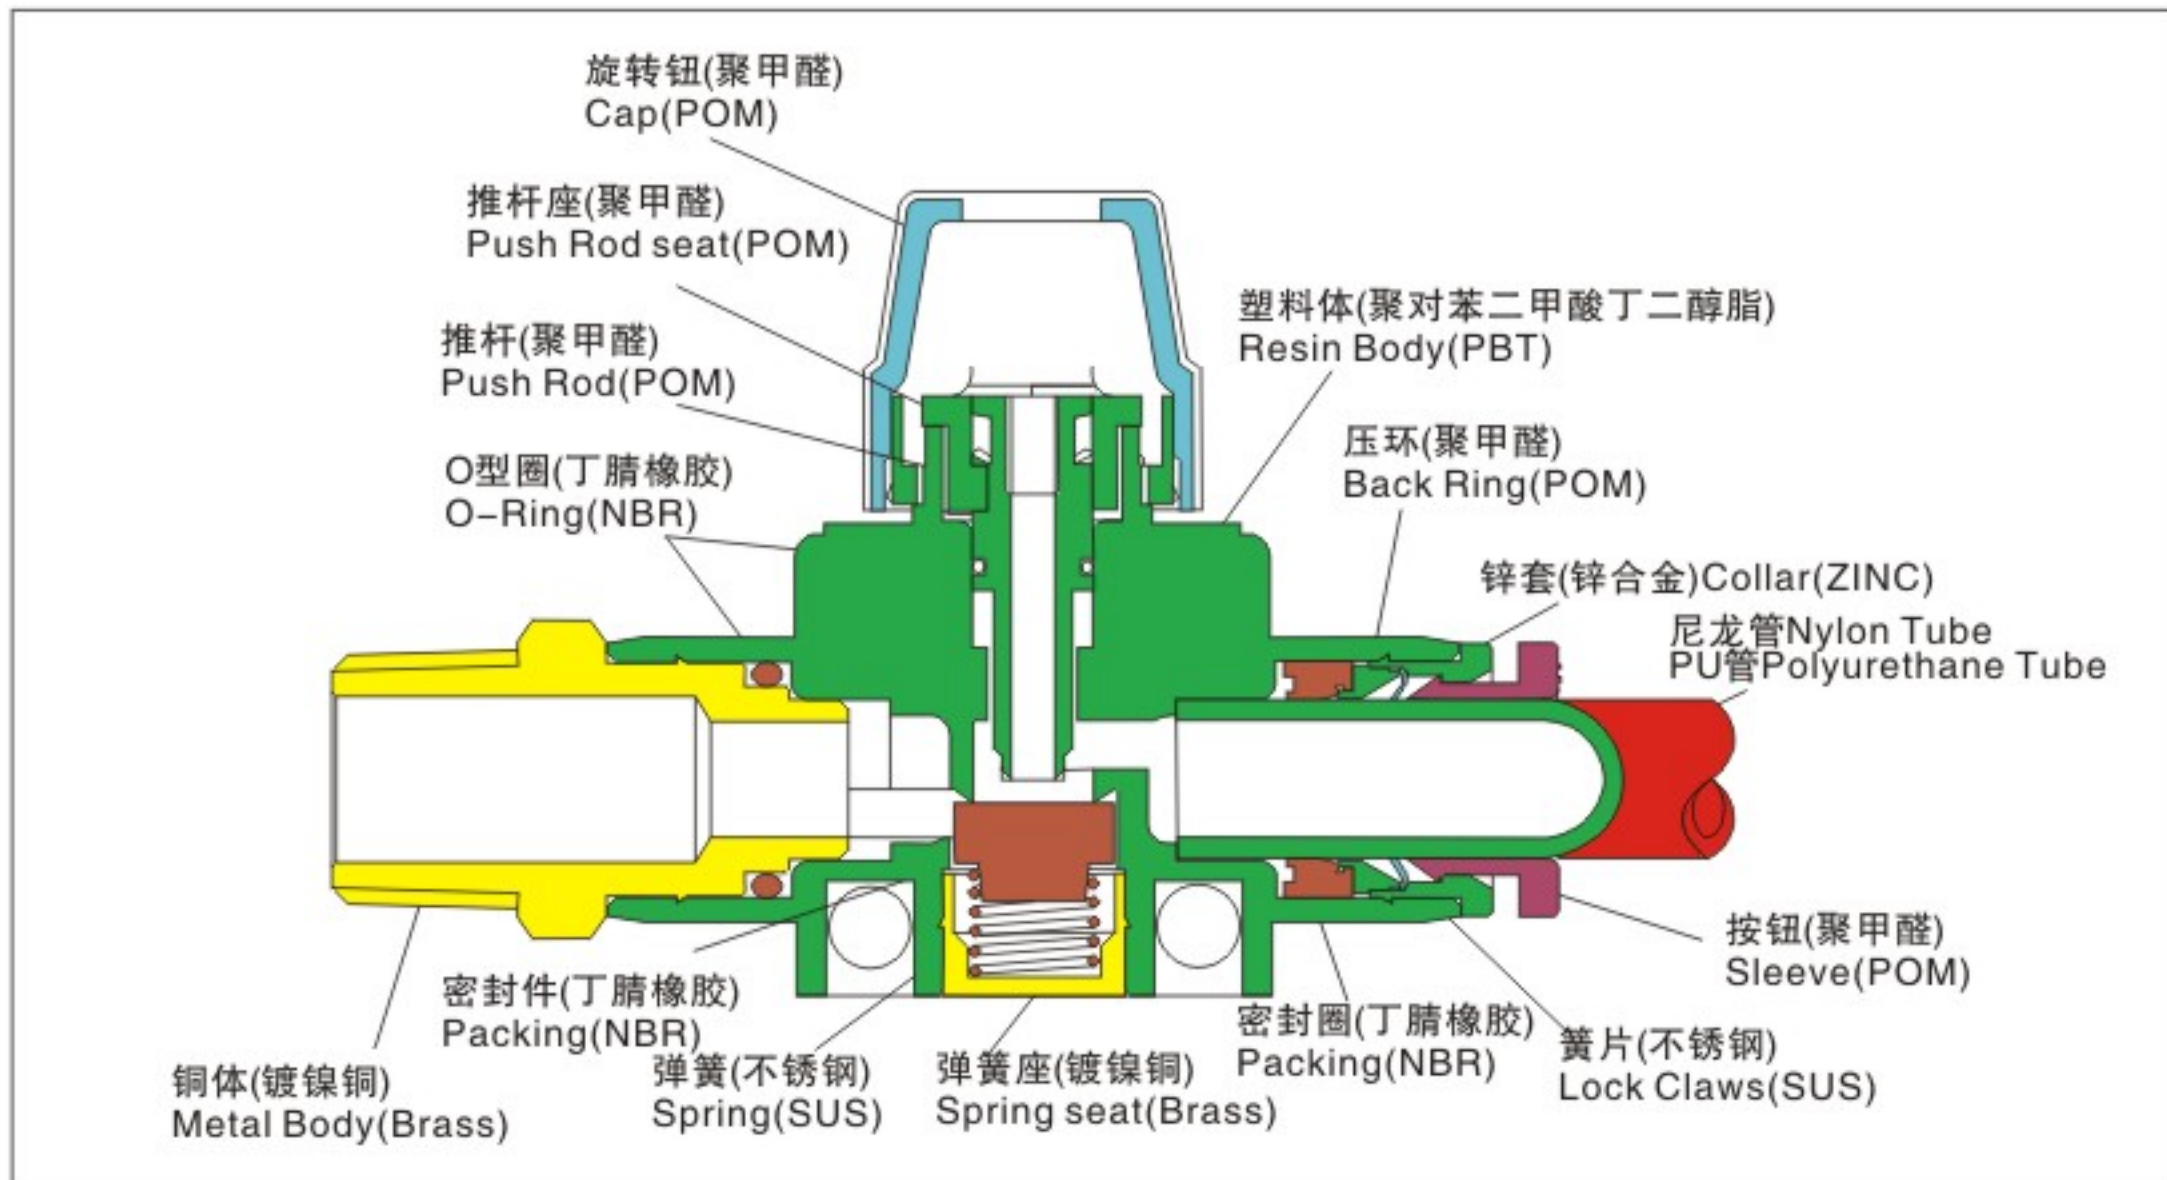

④ 螺纹规格


*Metric thread & R(PT)thread				
Taper pipe thread				
Code	01	02	03	04
Size	R1/8	R1/4	R3/8	R1/2

球阀 BALL VALVES

用途 APPLICATION

- 用于控制气动装置压缩空气的开与关
- Used for turning air pressure on and off for pneumatic devices.

结构图 Structural diagram

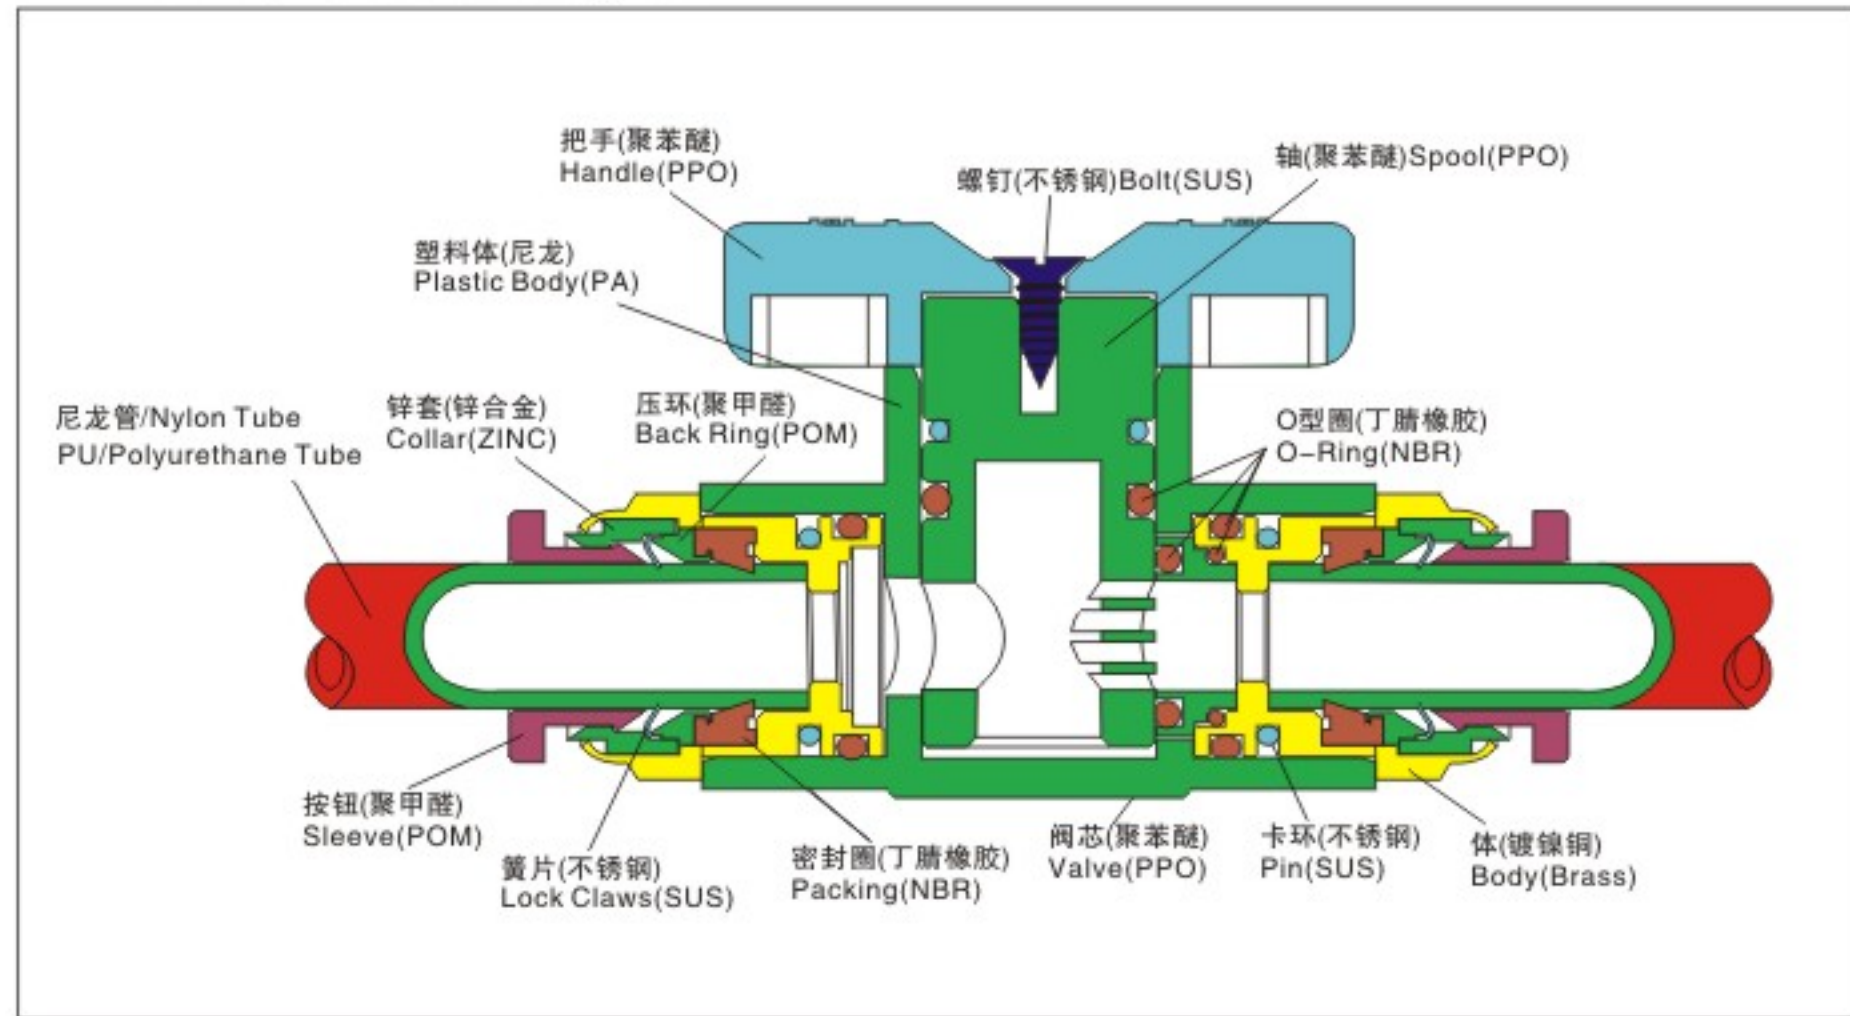

BVU 球阀 Union straight	
	
型号Model(φ D)	
管(公制)Tube (matric)	
BVU06	
BVU08	
BVU08-06	

BVC 球阀 straight treaf-fitting	
	
型号Model(φ D)	
管(公制)Tube (matric)	
BVC06-01	
BVC06-02	
BVC06-03	
BVC08-01	
BVC08-02	
BVC08-03	

BVC-G 球阀-G螺纹	
	
型号Model(φ D)	
管(公制)Tube (matric)	
BVC06-G01	
BVC06-G02	
BVC06-G03	
BVC08-G01	
BVC08-G02	
BVC08-G03	

手滑阀 HAND SLIDING FITTING 气控阀 AIR CONTROL VALVE(QKF)

用途 APPLICATION

用于控制气动装置压缩空气的开与关
Used for turning air pressure on and off for pneumatic devices.

特点 FEATURE

由于产品由黄铜及铝制成，因此长时间暴露在空气中，也可使用很长时间
Made of brass and aluminum for a long life-span.


JSV	
	
型号Model(φ D)	
管(公制)Tube (matric)	
JSV01-FS	JSV03-FS
JSV01-SS	JSV03-SS
JSV01-FF	JSV03-FF
JSV01-SF	JSV03-SF
JSV02-FS	JSV04-FS
JSV02-SS	JSV04-SS
JSV02-FF	JSV04-FF
JSV02-SF	JSV04-SF

ISV	01	-	SS
Hand Sliding Fittings	螺丝型号 Thread Size 01=1/8" 02=1/4" 03=3/8" 04=11/2"		FS: 内外牙型 (标准型) Female-male(standard type) SS: 双外牙型/Male-Male FF: 双内牙型/Female-Female SF: 外内牙型/Male-Female

特性 SPECIFICATION

- 压力保持的安全回路。
- 防止气缸停业后的自走现象。
- 气缸瞬间停止定位精确。
- 特殊回路设计应用。
- The pressure can be kept safe of return circuit.
- Prevent the cylinder work itself after it goes out of work.
- The position accurate once the cylinder work off.
- The special design and application of return circuit.

结构图

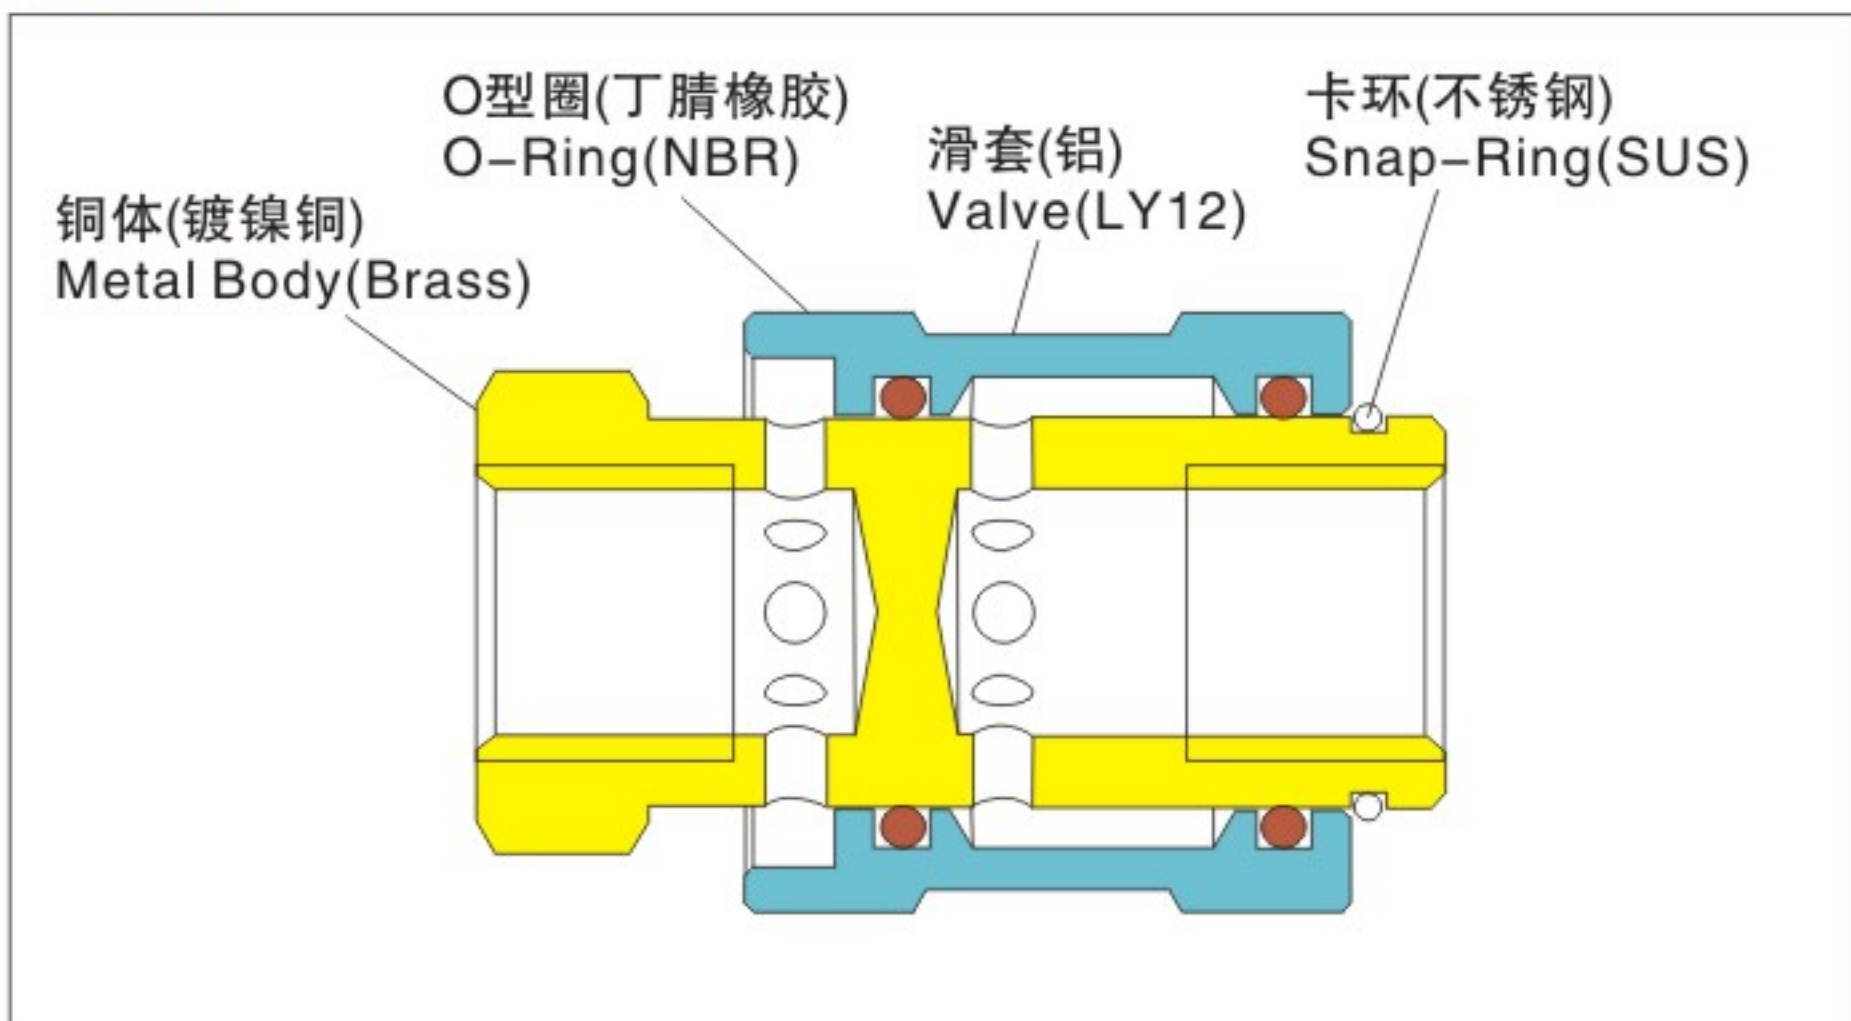

迷你接头 COMPACT ONE-TOUCH FITTINGS

特点 Features

超小型产品(COMPACT),比普通型号体积小40%,外形尺寸小20%,是小型化的ONE-TOUCH FITTINGS。
由于表面有镀铬处理,所以耐腐蚀性突出。

使用范围说明 Specifications

使用流体	Air(No other gases or liquids)	
使用压力	0~150PSI	0~10Kg/cm²(0~1000kPa)
负压	-29.5in Hg	-750mm Hg (10Torr)
使用温度范围	32~140° F	-10~60℃
使用气管种类	Polyurethane and nylon	

产品标识形色 Product code system

J	PC	06	-	01	C
①	②	③		④	⑤

- ①江淮
②型号
③管径大小(φD)

	Metric aize			Lnce size		
Code	03	04	06	1/8	5/32	1/4
Dia	φ 4	φ 4	φ 6	φ 1/8	φ 5/32	φ 1/4

④螺纹规格

*Metric thread & R(PT)thread				
Metric aize				
Code	M3	M5	M6	01
Size	M3×0.5	M5×0.8	M6×1.0	R1/8


*Inch thread (NUF & NPT)

	Unified fine thread	American standard taper pipe thread	
Code	U10U	U00U	U01U
Size	10-32UNF	NPT1/16	NPT1/8

⑤超小型



结构图 Structural diagram

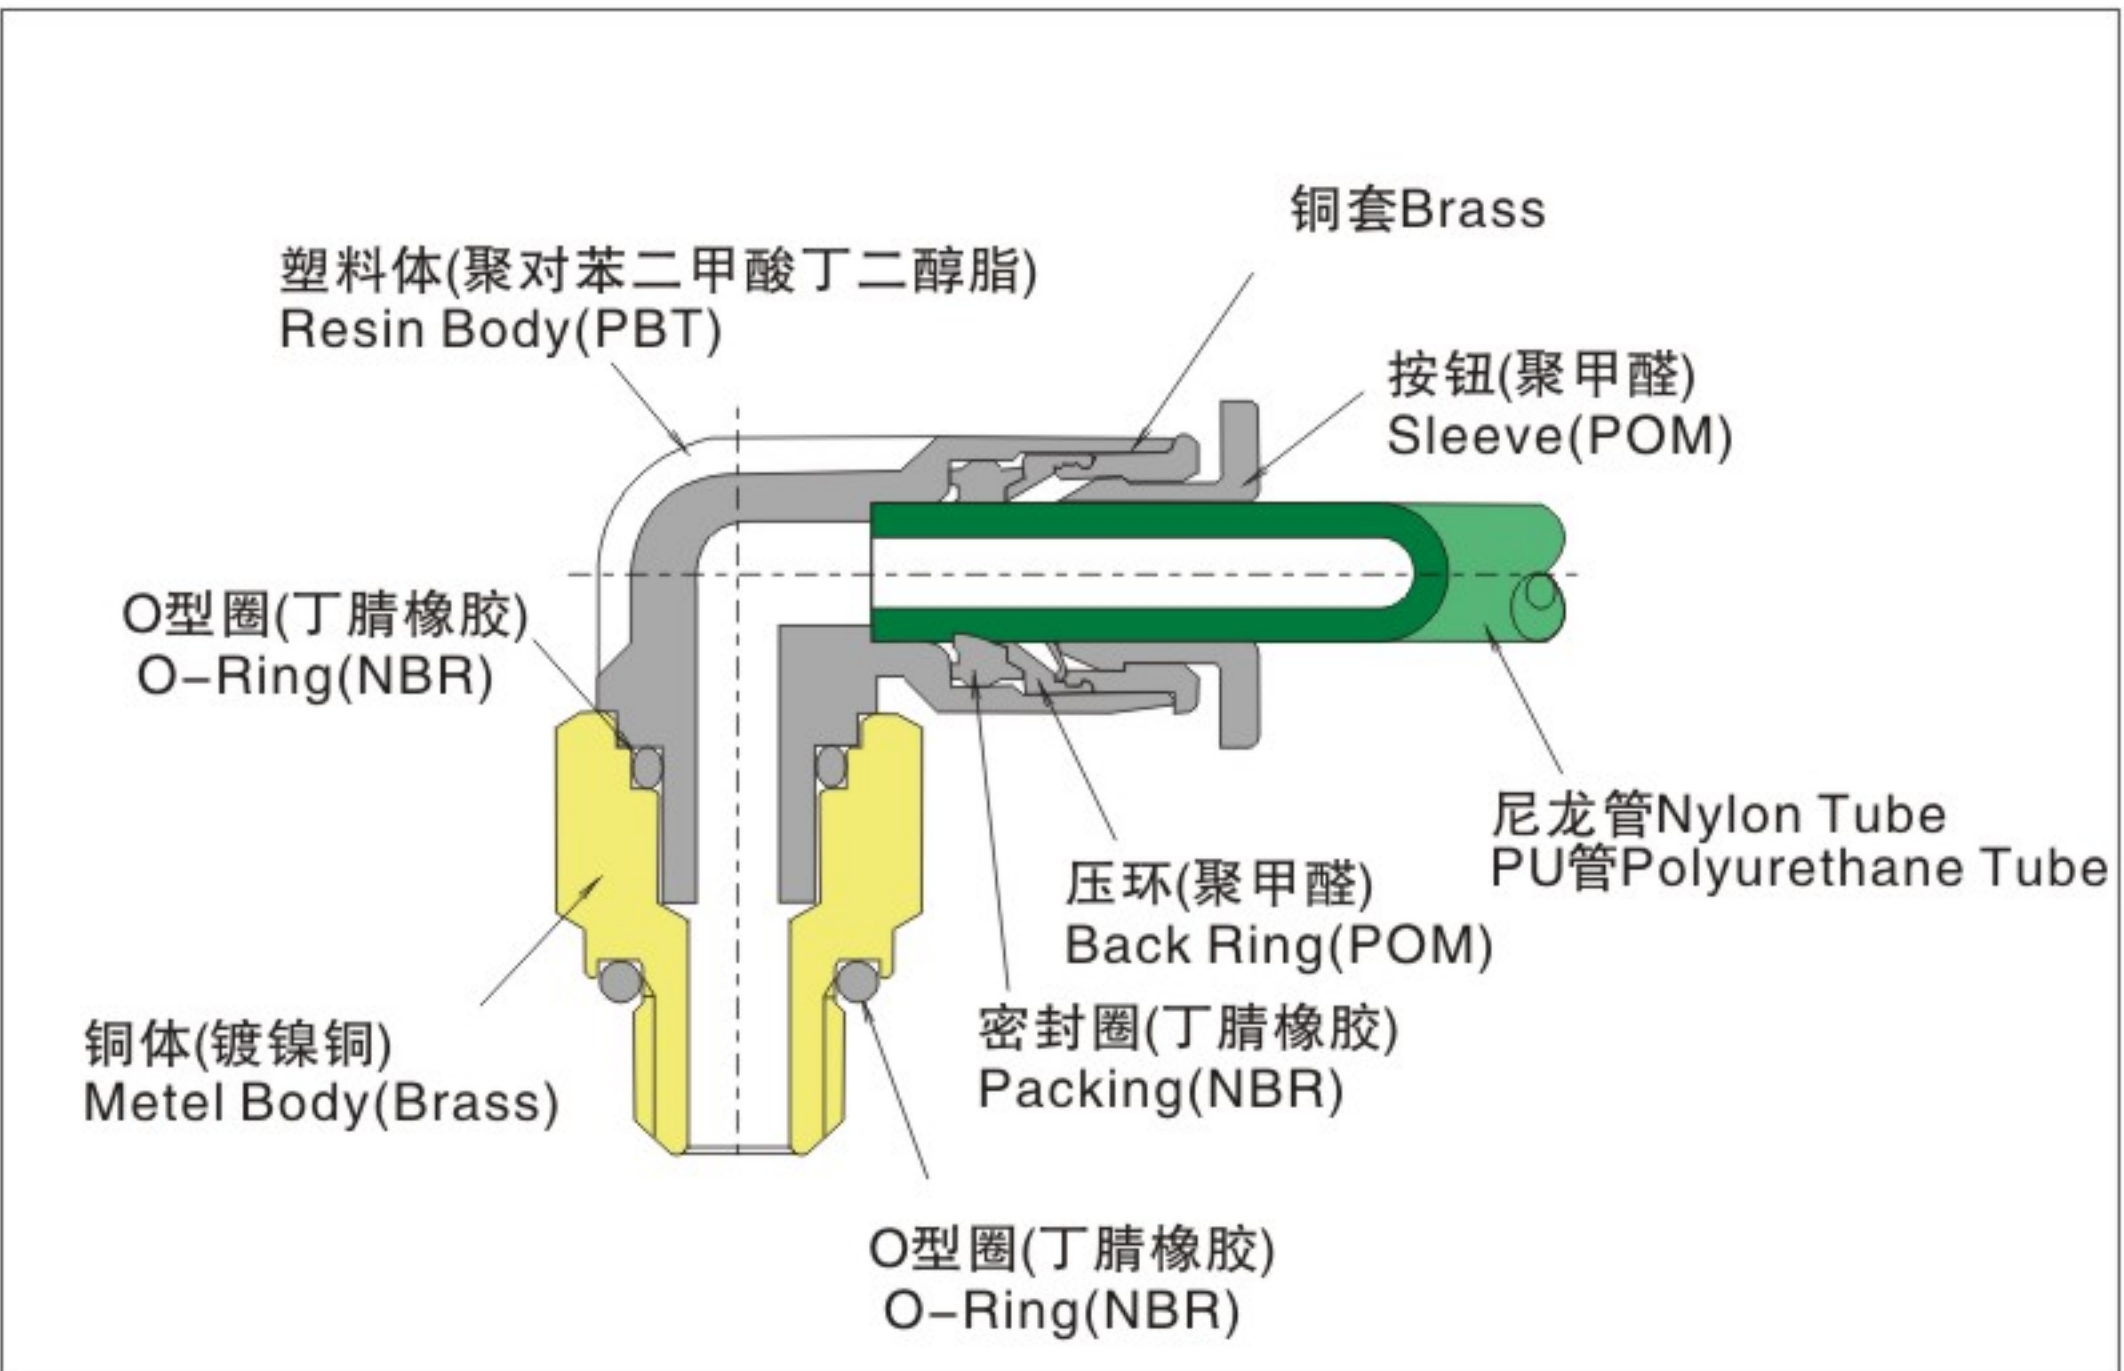

迷你接头 COMPACT ONE-TOUCH FITTINGS

JPC-C 螺纹直通 Male Straight	
型号Model(φ D)	
管(公制)Tube (metric)	
JPC03-M3C	JPC05-01C
JPC03-M5C	JPC05-02C
JPC03-01C	JPC06-M5C
JPC04-M3C	JPC06-01C
JPC04-M5C	JPC06-02C
JPC04-01C	
JPC04-02C	
JPC05-M5C	

JPOP-C 螺纹圆形直通 Round Male Straight	
型号Model(φ D)	
管(公制)Tube (metric)	
JPC03-M3	JPC05-01
JPC03-M5	JPC05-02
JPC03-01	JPC06-M5
JPC04-M3	JPC06-01
JPC04-M5	JPC06-02
JPC04-01	
JPC04-02	
JPC05-M5	

JPCF-C 内螺纹直通 Male Straight	
型号Model(φ D)	
管(公制)Tube (metric)	
JPCF03-M3C	JPCF05-01C
JPCF03-M5C	JPCF05-02C
JPCF03-01C	JPCF06-M5C
JPCF04-M3C	JPCF06-01C
JPCF04-M5C	JPCF06-02C
JPCF04-01C	
JPCF04-02C	
JPCF05-M5C	

JPL-C L 型螺纹两通 Male elbow	
型号Model(φ D)	
管(公制)Tube (metric)	
JPL03-M3C	JPL05-01C
JPL03-M5C	JPL05-02C
JPL03-01C	JPL06-M5C
JPL04-M3C	JPL06-01C
JPL04-M5C	JPL06-02C
JPL04-01C	
JPL04-02C	
JPL05-M5C	

JPU-C 塑料两通 Union U	
型号Model(φ D)	
管(公制)Tube (metric)	
JPU03C	
JPU04C	
JPU06C	

JPV-C L型塑料两通 Union L	
型号Model(φ D)	
管(公制)Tube (metric)	
JPV03C	
JPV04C	
JPV06C	

JPE-C L型塑料三通 Union T	
型号Model(φ D)	
管(公制)Tube (metric)	
JPE03C	
JPE04C	
JPE06C	

JPLL-C L型加长螺纹两通 Extended male elbow	
型号Model(φ D)	
管(公制)Tube (metric)	
JPLL03-M3C	JPLL06-M5C
JPLL03-M5C	JPLL06-M6C
JPLL03-M6C	JPLL06-01C
JPLL04-M3C	
JPLL04-M5C	
JPLL04-M6C	
JPLL04-01C	
JPLL06-M3C	

JPM-C 隔板两通 Bulkhead union	
型号Model(φ D)	
管(公制)Tube (metric)	
JPM03C	
JPM04C	
JPM06C	

JPLM-C L型隔板两通 Bulkhead union L	
型号Model(φ D)	
管(公制)Tube (metric)	
JPLM03C	
JPLM04C	
JPLM06C	

JPY-C Y型塑料两通 Union Y	
型号Model(φ D)	
管(公制)Tube (metric)	
JPY03C	
JPY04C	
JPY06C	

JSL-C节流阀 Union SL	
型号Model(φ D)	
管(公制)Tube (metric)	
JSL-C4-M3	
JSL-C4-M5	
JSL-C4-01	
JSL-C6-M5	
JSL-C6-01	

JPD-C螺纹侧三通 Union D		
型号Model(φ D)		
管(公制)Tube (metric)		
PD03-M3C	PD04-M3C	PD06-G01C
PD03-M5C	PD04-M5C	PD06-G02C
PD03-M6C	PD04-M6C	
PD03-01C	PD04-01C	
PD03-G01C	PD04-G02C	
PD04-M3C	PD06-M5C	
PD04-M5C	PD06-M6C	
PD04-M6C	PD06-01C	

JPB-C螺纹正三通 Union B		
型号Model(φ D)		
管(公制)Tube (metric)		
PB03-M3C	PB04-M3C	PB06-G01C
PB03-M5C	PB04-M5C	PB06-G02C
PB03-M6C	PB04-M6C	
PB03-01C	PB04-01C	
PB03-G01C	PB04-G02C	
PB04-M3C	PB06-M5C	
PB04-M5C	PB06-M6C	
PB04-M6C	PB06-01C	

迷你宝塔型 MINI BARB FITTINGS

产品标识色 Product code system

LC	0425	—	M5
①	②		③

①型号 ②配管径

编号	0320	0425	0535	0640
外径	φ3	φ4	φ5	φ6
内径	φ2	φ2.5	φ3.5	φ4

LC迷你直行 Minimal Straight	
	
型号Model(φD)	
管(公制)Tube (metric)	
LC-0320-M3	LC-0535-M5
LC-0320-M5	LC-0640-M3
LC-0425-M3	LC-0640-M5
LC-0425-M5	LC-0640-M6
LC-0425-M6	

LB迷你T型 Minimal Tee	
	
型号Model(φD)	
管(公制)Tube (metric)	
LB-0640-M5	

LB通用T型 Universal Tee	
	
型号Model(φD)	
管(公制)Tube (metric)	
LB-FM5-M5	

LH迷你通用弯头型 Minimal Universal Elbow	
	
型号Model(φD)	
管(公制)Tube (metric)	
LH-0320-M5	
LH-0425-M5	
LH-0640-M5	

LH通用弯头型 Universal Elbow	
	
型号Model(φD)	
管(公制)Tube (metric)	
LH-FM5-M5	

LL联管弯头型	
	
型号Model(φD)	
管(公制)Tube (metric)	
LL-FM5	



P-A系列气动接头 PLASTIC FITTINGS WITH BRASS SLEEVE

使用说明 Instruction For Use

适用工作流体	Fluid Available	压缩过滤空气 Air,Vacuum
使用压力范围	Pressure Range	0~10bar
负压	Negative Pressure	-100KPa(10 Torr)
爆破压力	Pressure Proof	16bar
使用温度范围	Operating Temperature Range	0~60℃
适用气管	Tube Material	PE.PU/Nylon and Polyurethane

产品特点 Features

- 简单灵巧，形式多样，满足任何气动布管需要
- 即使安装以后，塑料管体也可任意转向
- 套管采用椭圆形设计，拆卸更加省力方便
- PC型直通接头的均带内角孔便于狭窄处安装
- Various mode with simple design, can meet any layout demands of pneumatic pipes.
- The plastic tube also can be rotated freely after installation.
- The release ring which adopted elliptic design easy to dismount.
- All PC model direct connection joint have internal hexagonal hole for easy installation in narrow space.

产品标识色 Product code system

P	C	-	A	8	-	02
连接螺纹代号	形状代号		接头系列代号			
Connecting Thread Code	Hape Code		Connector Series Code			
接头适用	形种代号(铜帽盖)					
Connector Application	Shape Types Of Code (Copper Dome)					

①"-A"表示塑料体，脱离环为铜体。

①"-A" mean plastic body, out of the loop for the copper.

	公制管/Metric Size														英制管/Inch Size					
代号/Code	4	6	8	10	12	14	16	5	7	9	11	13	15	5/32	3/16	1/4	5/16	3/8	1/2	5/8
气管外径/Tube outer diameter mm	Φ4	Φ6	Φ8	Φ10	Φ12	Φ14	Φ16	Φ5	Φ7	Φ9	Φ11	Φ13	Φ15	Φ5/32	Φ3/16	Φ1/4	Φ5/16	Φ3/8	Φ1/2	Φ5/8

③ 螺纹型式及尺寸/Thread Type and Size

	公制管/Metric Size									
代号/Code	M5	M6	M08	M10	M10A	M12	M12A	M14	M16	M20
螺纹/Thread	M5×0.8	M6×1	M8×1	M10×1	M10×1.5	M12×1.25	M12×1.5	M14×1.5	M16×1.5	M20×1.5

迷你快拧型 MINI QUICK CONNECTOR

特点 Features

迷你压合型接头

广泛的应用尼龙管，并且也能承受高压

The Mini Compression Fittings

The Mini Compression Fittings are used


in Nylon Tube extensively and are able to

bear high pressure.

结构图 Structural diagram

产品标识色 Product code system

TC	04	-	01
Two Touch Fitting	气管直径 Tube Dia 规格 Code 04 06 08		螺纹型号 Thread Size 公制螺纹/Metric Thread 规格/Code M3 M5 M6 01
			型号/Size M3×0.5 M3×0.8 M6×1 G1/8

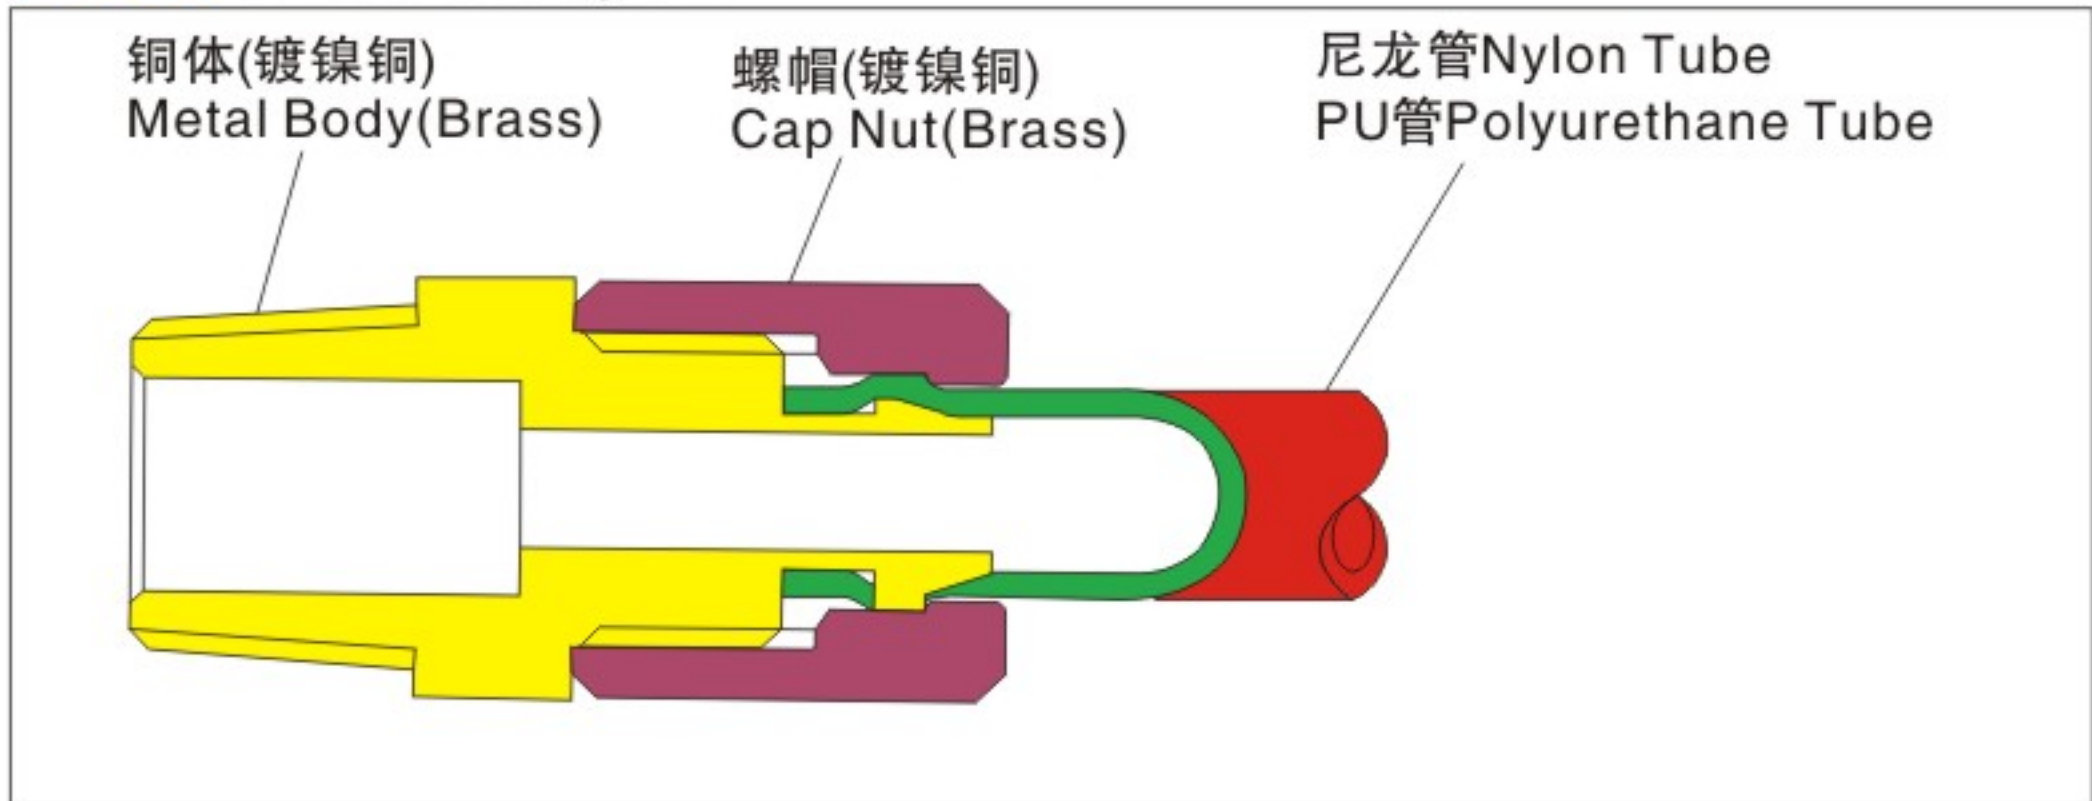

使用流体/Fluid	空气(无其他的气体 and 液体)/Air(no other gases or liquids)
使用压力范围/Operating Pressure	0~0.1MPa(150Pis)
使用真空压力(负压)/Negative Pressure	-100KPa(-29.5in · Hg)
使用温度范围/Operating Temperature	0~+60℃(32-140° F)
使用软管/Applicable Tube	PU及尼龙/Polyurethane and Nylon

TC 压合型直通	
	
型号Model(φD)	
管(公制)Tube (metric)	
TC03-M3	TC04-G01
TC03-M5	TC06-M5
TC04-M3	TC06-M6
TC04-M5	TC06-G01
TC04-M6	

TL 压合型弯头	
	
型号Model(φD)	
管(公制)Tube (metric)	
TL03-M5	TL06-M5
TL03-M3	TL06-M6
TL04-M3	TL06-G01
TL04-M5	
TL04-G01	

L联管弯头型	
	
型号Model(φD)	
管(公制)Tube (metric)	
LL-FM5	

JPC-A	
	
型号Model(φD)	
管(公制)Tube (metric)	
JPC-A04-M5	JPC-A10-01
JPC-A04-M6	JPC-A14-02
JPC-A04-01	JPC-A14-03
JPC-A04-02	JPC-A14-03
JPC-A04-03	JPC-A16-01
JPC-A06-M5	JPC-A16-02
JPC-A06-M6	JPC-A16-03
JPC-A06-01	JPC-A16-03
JPC-A06-02	JPC-A16-03
JPC-A06-03	JPC-A16-03
JPC-A06-04	JPC-A16-03
JPC-A08-01	JPC-A16-03
JPC-A08-02	JPC-A16-03
JPC-A08-03	JPC-A16-03
JPC-A08-04	JPC-A16-03

JPOC-A	
	
型号Model(φD)	
管(公制)Tube (metric)	
JPOC-A04-M5	JPOC-A10-01
JPOC-A04-M6	JPOC-A14-02
JPOC-A04-01	JPOC-A14-03
JPOC-A04-02	JPOC-A14-03
JPOC-A04-03	JPOC-A16-01
JPOC-A06-M5	JPOC-A16-02
JPOC-A06-M6	JPOC-A16-03
JPOC-A06-01	JPOC-A16-03
JPOC-A06-02	JPOC-A16-03
JPOC-A06-03	JPOC-A16-03
JPOC-A06-04	JPOC-A16-03
JPOC-A08-01	JPOC-A16-03
JPOC-A08-02	JPOC-A16-03
JPOC-A08-03	JPOC-A16-03
JPOC-A08-04	JPOC-A16-03

JPCF-A	
	
型号Model(φD)	
管(公制)Tube (metric)	
JPCF-A04-M5	JPCF-A10-04
JPCF-A04-01	JPCF-A12-01
JPCF-A04-02	JPCF-A12-02
JPCF-A04-03	JPCF-A12-03
JPCF-A06-M5	JPCF-A12-04
JPCF-A06-01	JPCF-A12-04
JPCF-A06-02	JPCF-A12-04
JPCF-A06-03	JPCF-A12-04
JPCF-A08-01	JPCF-A12-04
JPCF-A08-02	JPCF-A12-04
JPCF-A08-03	JPCF-A12-04
JPCF-A10-01	JPCF-A12-04
JPCF-A10-02	JPCF-A12-04
JPCF-A10-03	JPCF-A12-04

JPL-A	
	
型号Model(φD)	
管(公制)Tube (metric)	
JPL-A04-M5	JPL-A10-01
JPL-A04-M6	JPL-A14-02
JPL-A04-01	JPL-A14-03
JPL-A04-02	JPL-A14-03
JPL-A04-03	JPL-A16-01
JPL-A06-M5	JPL-A16-02
JPL-A06-M6	JPL-A16-03
JPL-A06-01	JPL-A16-03
JPL-A06-02	JPL-A16-03
JPL-A06-03	JPL-A16-03
JPL-A06-04	JPL-A16-03
JPL-A08-01	JPL-A16-03
JPL-A08-02	JPL-A16-03
JPL-A08-03	JPL-A16-03
JPL-A08-04	JPL-A16-03

JPLF-A	
	
型号Model(φD)	
管(公制)Tube (metric)	
JPLF-A04-M5	JPLF-A10-04
JPLF-A04-01	JPLF-A12-01
JPLF-A04-02	JPLF-A12-02
JPLF-A04-03	JPLF-A12-03
JPLF-A06-M5	JPLF-A12-04
JPLF-A06-01	JPLF-A12-04
JPLF-A06-02	JPLF-A12-04
JPLF-A06-03	JPLF-A12-04
JPLF-A08-01	JPLF-A12-04
JPLF-A08-02	JPLF-A12-04
JPLF-A08-03	JPLF-A12-04
JPLF-A10-01	JPLF-A12-04
JPLF-A10-02	JPLF-A12-04
JPLF-A10-03	JPLF-A12-04

JPB-A	
	
型号Model(φD)	
管(公制)Tube (metric)	
JPB-A04-M5	JPB-A10-01
JPB-A04-M6	JPB-A14-02
JPB-A04-01	JPB-A14-03
JPB-A04-02	JPB-A14-03
JPB-A04-03	JPB-A16-01
JPB-A06-M5	JPB-A16-02
JPB-A06-M6	JPB-A16-03
JPB-A06-01	JPB-A16-03
JPB-A06-02	JPB-A16-03
JPB-A06-03	JPB-A16-03
JPB-A06-04	JPB-A16-03
JPB-A08-01	JPB-A16-03
JPB-A08-02	JPB-A16-03
JPB-A08-03	JPB-A16-03
JPB-A08-04	JPB-A16-03

P-A系列气动接头 PLASTIC FITTINGS WITH BRASS SLEEVE

型号Model(φD) 管(公制)Tube (metric)		
JPX-A04-M5	JPX-A10-01	JPX-A14-01
JPX-A04-M6	JPX-A10-02	JPX-A14-02
JPX-A04-01	JPX-A10-03	JPX-A14-03
JPX-A04-02	JPX-A10-04	JPX-A5/16-01
JPX-A04-03	JPX-A12-01	JPX-A5/16-02
JPX-A04-M5	JPX-A12-02	JPX-A5/16-03
JPX-A04-M6	JPX-A12-03	JPX-A3/8-01
JPX-A06-01	JPX-A12-04	JPX-A3/8-02
JPX-A06-02	JPX-A16-02	JPX-A3/8-03
JPX-A06-03	JPX-A16-03	JPX-A3/8-04
JPX-A06-04	JPX-A16-04	JPX-A1/2-02
JPX-A08-01	JPX-A16-06	JPX-A1/2-03
JPX-A08-02		JPX-A1/2-04
JPX-A08-03		
JPX-A08-04		

		
型号Model(φD) 管(公称)Tube (metric)		
JSL-A04-M5	JSL-A10-01	JSL-A1/4-M5
JSL-A04-M6	JSL-A10-02	JSL-A1/4-01
JSL-A04-01	JSL-A10-03	JSL-A1/4-02
JSL-A04-02	JSL-A10-04	JSL-A5/16-01
JSL-A06-M5	JSL-A12-02	JSL-A5/16-02
JSL-A06-M6	JSL-A12-03	JSL-A5/16-03
JSL-A06-01	JSL-A12-04	JSL-A3/8-02
JSL-A06-02	JSL-A16-04	JSL-A3/8-03
JSL-A08-03		
JSL-A08-M5		
JSL-A08-M6		
JSL-A08-01		
JSL-A08-02		
JSL-A08-03		
JSL-A08-04		

JPC-A(G)		φD
		
R		
型号Model(φD)		
管(公称)Tube (matrix)		
JPC-A(G)04-M5	JPC-A(G)10-01	JPC-A(G)1/4-01
JPC-A(G)04-M6	JPC-A(G)10-02	JPC-A(G)1/4-02
JPC-A(G)04-01	JPC-A(G)10-03	JPC-A(G)1/4-03
JPC-A(G)04-02	JPC-A(G)10-04	JPC-A(G)5/16-01
JPC-A(G)04-03	JPC-A(G)12-01	JPC-A(G)5/16-02
JPC-A(G)06-M5	JPC-A(G)12-02	JPC-A(G)5/16-03
JPC-A(G)06-M6	JPC-A(G)12-03	JPC-A(G)3/8-01
JPC-A(G)06-01	JPC-A(G)12-04	JPC-A(G)3/8-02
JPC-A(G)06-02	JPC-A(G)14-01	JPC-A(G)3/8-03
JPC-A(G)06-03	JPC-A(G)14-02	JPC-A(G)3/8-04
JPC-A(G)06-04	JPC-A(G)14-04	JPC-A(G)1/2-02
JPC-A(G)08-01	JPC-A(G)16-02	JPC-A(G)1/2-03
JPC-A(G)08-02	JPC-A(G)16-03	JPC-A(G)1/2-04
JPC-A(G)08-03	JPC-A(G)16-04	
JPC-A(G)08-04	JPC-A(G)16-06	

型号 Model (φ D)		
管(公制)Tube (metric)		
JPL-A/G04-M5	JPL-A/G10-01	JPL-A/G14-01
JPL-A/G04-M6	JPL-A/G10-02	JPL-A/G14-02
JPL-A/G04-M8	JPL-A/G10-03	JPL-A/G14-03
JPL-A/G04-01	JPL-A/G10-04	JPL-A/G15/16-01
JPL-A/G04-03	JPL-A/G12-01	JPL-A/G15/16-02
JPL-A/G05-M5	JPL-A/G12-02	JPL-A/G15/16-03
JPL-A/G06-M5	JPL-A/G12-03	JPL-A/G13/8-01
JPL-A/G06-01	JPL-A/G12-04	JPL-A/G13/8-02
JPL-A/G06-02	JPL-A/G14-01	JPL-A/G13/8-03
JPL-A/G06-03	JPL-A/G14-02	JPL-A/G13/8-04
JPL-A/G06-04	JPL-A/G14-04	JPL-A/G12-02
JPL-A/G08-01	JPL-A/G16-02	JPL-A/G12-03
JPL-A/G08-02	JPL-A/G16-03	JPL-A/G13/2-04
JPL-A/G08-03	JPL-A/G16-04	
JPL-A/G08-04	JPL-A16-06	

		
型号Model (φ D) 管(公制)Tube (metric)		
JPLF-A/G04-M5	JPLF-A/G12-01.04	JPLF-A/G16-01.04
JPLF-A/G04-01	JPLF-A/G12-01.01	JPLF-A/G16-01.01
JPLF-A/G04-02	JPLF-A/G12-01.02	JPLF-A/G16-01.03
JPLF-A/G04-M5	JPLF-A/G12-01.03	JPLF-A/G16-01.04
JPLF-A/G06-01	JPLF-A/G12-01.04	JPLF-A/G16-01.05
JPLF-A/G06-02		JPLF-A/G16-01.06
JPLF-A/G06-03		JPLF-A/G16-01.07
JPLF-A/G06-04		JPLF-A/G16-01.08
JPLF-A/G08-01		JPLF-A/G16-01.09
JPLF-A/G08-02		JPLF-A/G16-01.10
JPLF-A/G08-03		JPLF-A/G16-01.12
JPLF-A/G08-04		JPLF-A/G16-01.13
JPLF-A/G10-01		JPLF-A/G16-01.14
JPLF-A/G10-02		
JPLF-A/G10-03		

		
型号Model(φD)		
φ(公制)Tube (metric)		
JPD-A(G)04-M5	JPD-A(G)10-10	JPD-A(G)1/4-01
JPD-A(G)04-M6	JPD-A(G)10-12	JPD-A(G)1/4-02
JPD-A(G)04-01	JPD-A(G)10-03	JPD-A(G)1/4-03
JPD-A(G)04-02	JPD-A(G)10-04	JPD-A(G)1/4-04
JPD-A(G)04-03	JPD-A(G)12-01	JPD-A(G)5/16-03
JPD-A(G)04-05	JPD-A(G)12-02	JPD-A(G)5/16-02
JPD-A(G)06-M5	JPD-A(G)12-03	JPD-A(G)5/16-03
JPD-A(G)06-01	JPD-A(G)12-04	JPD-A(G)3/8-01
JPD-A(G)06-02	JPD-A(G)12-03	JPD-A(G)3/8-02
JPD-A(G)06-03	JPD-A(G)16-02	JPD-A(G)3/8-03
JPD-A(G)06-04	JPD-A(G)16-03	JPD-A(G)3/8-04
JPD-A(G)08-01	JPD-A(G)16-04	JPD-A(G)1/2-02
JPD-A(G)08-02	JPD-A(G)16-06	JPD-A(G)1/2-03
JPD-A(G)08-03		JPD-A(G)1/2-04
JPD-A(G)08-04		
JPD-A(G)08-03		

		
型号Model(ΦD) 管(公制)Tube (metric)		
JPX-A(G)04-M5	JPX-A(G)10-01	JPX-A(G)1/4-01
JPX-A(G)04-M6	JPX-A(G)10-02	JPX-A(G)1/4-02
JPX-A(G)04-01	JPX-A(G)10-03	JPX-A(G)1/4-03
JPX-A(G)04-02	JPX-A(G)10-04	JPX-A(G)5/16-01
JPX-A(G)04-03	JPX-A(G)12-01	JPX-A(G)5/16-02
JPX-A(G)06-M5	JPX-A(G)12-02	JPX-A(G)5/16-03
JPX-A(G)06-M6	JPX-A(G)12-03	JPX-A(G)3/8-01
JPX-A(G)06-01	JPX-A(G)12-04	JPX-A(G)3/8-02
JPX-A(G)06-02	JPX-A(G)16-02	JPX-A(G)3/8-03
JPX-A(G)06-03	JPX-A(G)16-03	JPX-A(G)3/8-04
JPX-A(G)08-01	JPX-A(G)16-04	JPX-A(G)1/2-02
JPX-A(G)08-02	JPX-A(G)16-06	JPX-A(G)1/2-03
JPX-A(G)08-03		JPX-A(G)1/2-04
JPX-A(G)08-04		
JPX-A(G)08-05		

型号 Model(φD)	管(公制) Tube (metric)
JPU-A04	
JPU-A06	
JPU-A08	
JPU-A10	
JPU-A12	
JPU-A14	
JPU-A16	

[illegible]

管(公制)Tube (metric)	
JPK04	
JPK06	
JPK08	
JPK10	
JPK12	

管(公制) [tube (metric)]
JPK-A04
JPK-A06
JPK-A08
JPK-A10
JPK-A12

N系列净水管快速接头 WATER ADAPTORS

water adaptors

材料特征及标准 Material Features And Standards

- POM: 同样也叫做乙缩醛, 耐用, 有较好的抗蠕变和抗疲劳能力, 它能很有效的抵抗大范围的有机和无机化学质, 不建议用于强酸或反复暴露于强氧化剂里。
物理和化学特征
- 物理状态: 固体/颗粒 熔点: 165℃ 气压: <0.001mm Hg
- 物理力学特征: 1.38-1.42水中溶解度: 可以忽略不计 <0.1% 挥发性: <1.0%
- 不相容性: 强酸和氧化物。不要与PVC等材料混合使用
- 聚合作用: 不发生聚合作用
- PP: 拥有较好的化学抵抗能力, 耐寒性和在强氧化剂里的强容忍性。

产品特征 Features

- 适用于食品：“J·HC”接头使用通过BS、WRAS、FDA、NSF等认证的无毒无害的材料制造的，是用做纯净水机，水，食品和饮料系列的部件。
- 实用性：“J·HC”接头使用起来更快，更方便，更安全。
- 设计：在实践的基础上而得出的独有的内爪的设计，被广大的客户所赞同。
- 应用：可以运用于惰性气体和液体，可以再度使用。同时，由于我们对于每种型号可以提供很多尺寸。因此，产品的应用范围很广泛。
- 颜色：白色和灰色等

接头的工作压力和温度 Operating Pressure and Temperature

尺寸 Size 温度 Temperature	1/4"	3/8"					
	10mm	12mm	15mm	20mm	22mm	25mm	32mm
-20℃ (-4℃)	230Psi				170Psi		
1℃ (34℃)	230Psi				170Psi		
20℃ (68℃)	230Psi				170Psi		
65℃ (149℃)	150Psi				100Psi		

- ⚙️ 如果J·HC接头被用于不同的温度和压力的话请联系我们
⚙️ If our products are used in different temperature and pressure, please contact us.





允许的扭矩方框里 Allowed Torque

转矩 Torque			1/4" , 3/8"		10MM,12MM,15MM		20MM,2MM,25MM,32MM	
塑料 Plastic	最大转矩 Max Torque	(N.m)	1.5		3.0		4.0	
钢 Steal	最大转矩 Max Torque	(N.m)	7.9-9.0	12.0-14.0	22.0-24.0	28.0-30	40.0	

- POM: It is durable that can resist a wide range of organic and inorganic chemical substance effectively. But do not be suggested to use in strong acid environment or exposed to strong oxidizing agents repeatedly.
- Physical State: Solid Melting Point: 165°C Air Pressure: <0.001mm Hg
- Physical Property: Water Solubility: Negligible<0.1% Volatility<1.0%
- Incompatibility: Strong Acid and Oxide. DO NOT mix with PVC or the similar materials.
- Polymerization: No Polymerization
- PP: It has good resistance to chemical, cold and strong oxidizing agents environment.

- **Applied to Food:** J · HC water purifier adapter connector is made of non-poisonous and non-harmful material which has passed the certification by BS, WRAS, FDA, NSF, etc. It is the component for the water purifier, food and beverage machines.
- **Usability:** Faster, safer and more convenient.
- **Design:** The unique design of inside claw on the basis of practice is appreciated by our customers.
- **Application:** It can be used in inert gas and liquid reusable. Moreover, it has a wide application because we can provide various sizes for each type.
- **Color:** White, Gray, etc.

N系列净水管快速接头 WATER ADAPTORS

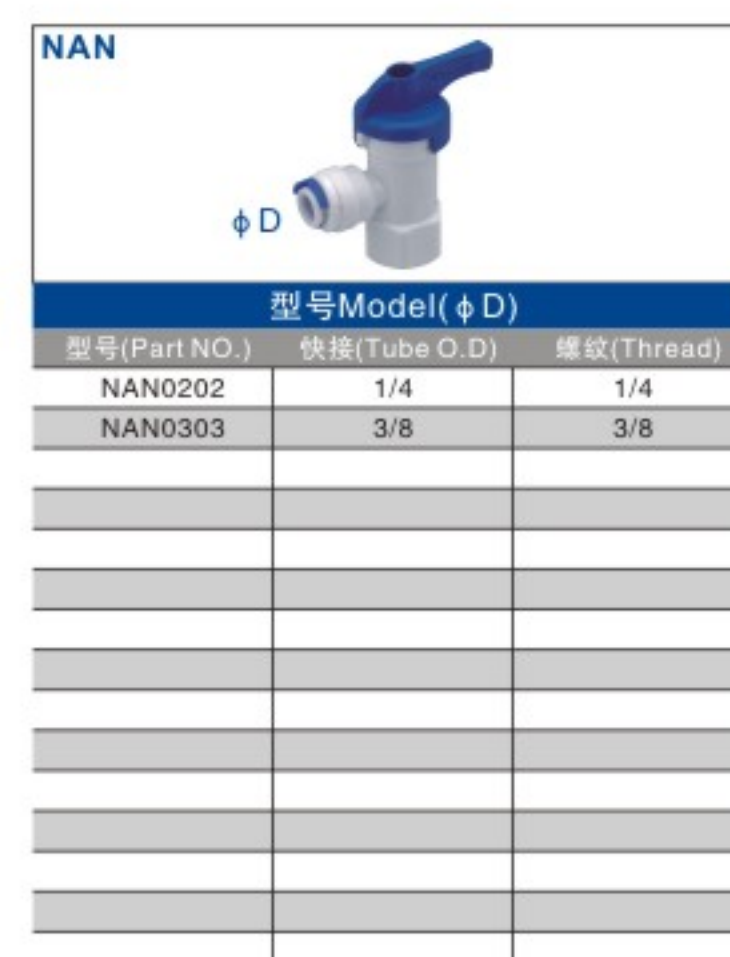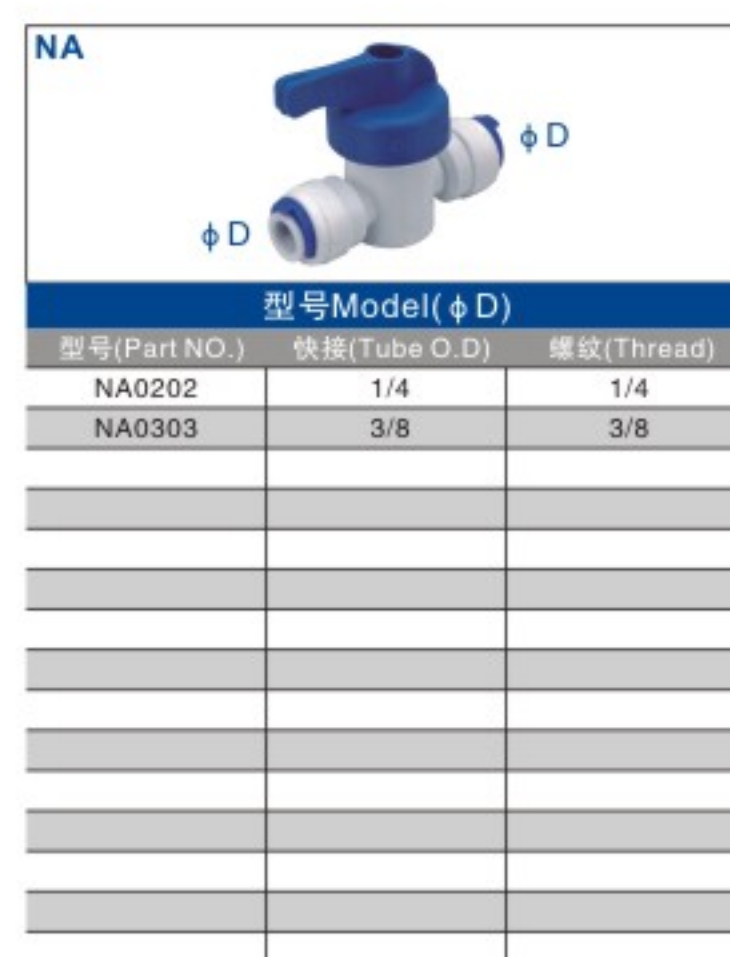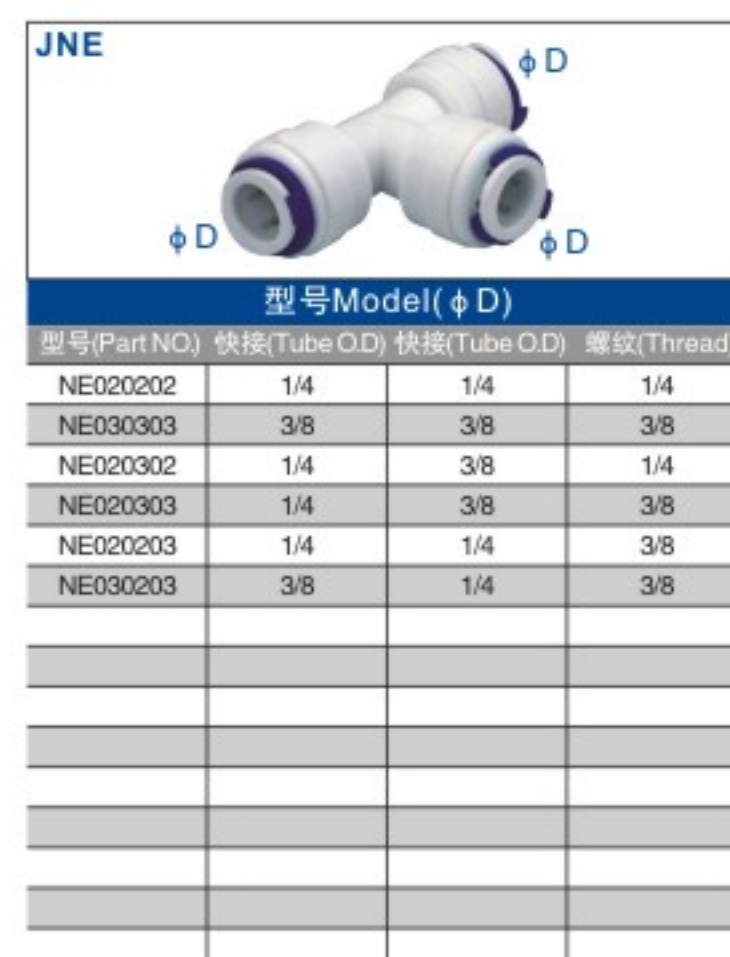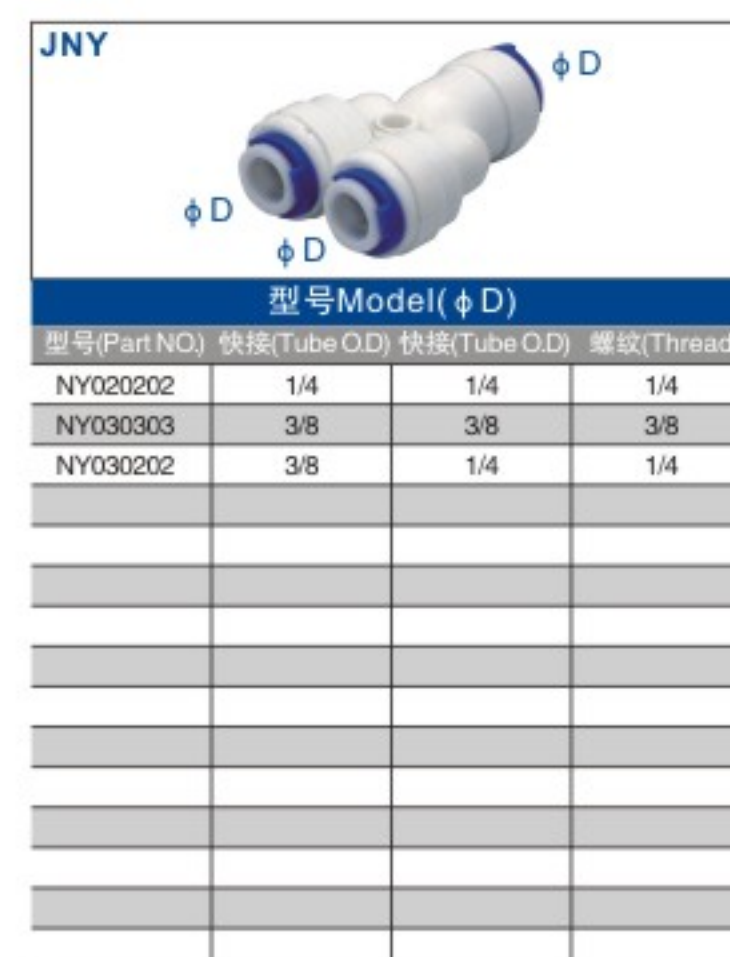


F系列光纤透明接头F F SERIVES CLEAR FIBRE FITTINGS

使用说明 Instruction Fibre For Use





Fluid Available 适用工作流体	Air,Vacuum 压缩过滤空气	
Pressure Range 使用压力范围	(3~8mm)	0~16bar
	(10~16mm)	0~10bar
Pressure Proof 爆破压力	(3~8mm)	25bar
	(10~16mm)	16bar
Ambientandfluidtemperature 适用环境及流体温度	-10~60℃	
Tubematerial 适用气管	PE,PU/Nylon and Polyurethane	

F系列接头型号表示说明 F series fittings model designation

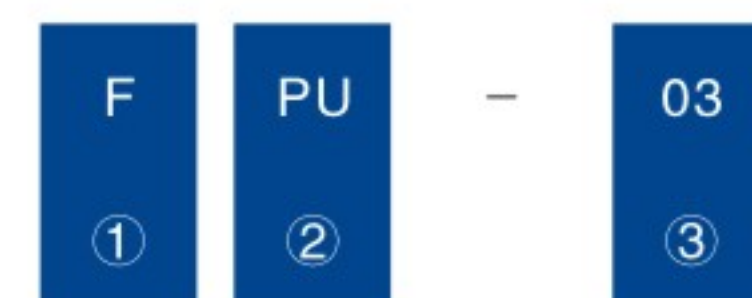


- ①接头系列代号/Fittings series code
②形状代号/Shape code
③接头适用/Connector application

代号/code	03	04	05	06	07	08	10	12	14	16
公称变径 Nominal variable diameter	φ 3	φ 4	φ 5	φ 6	φ 7	φ 8	φ 10	φ 12	φ 14	φ 16

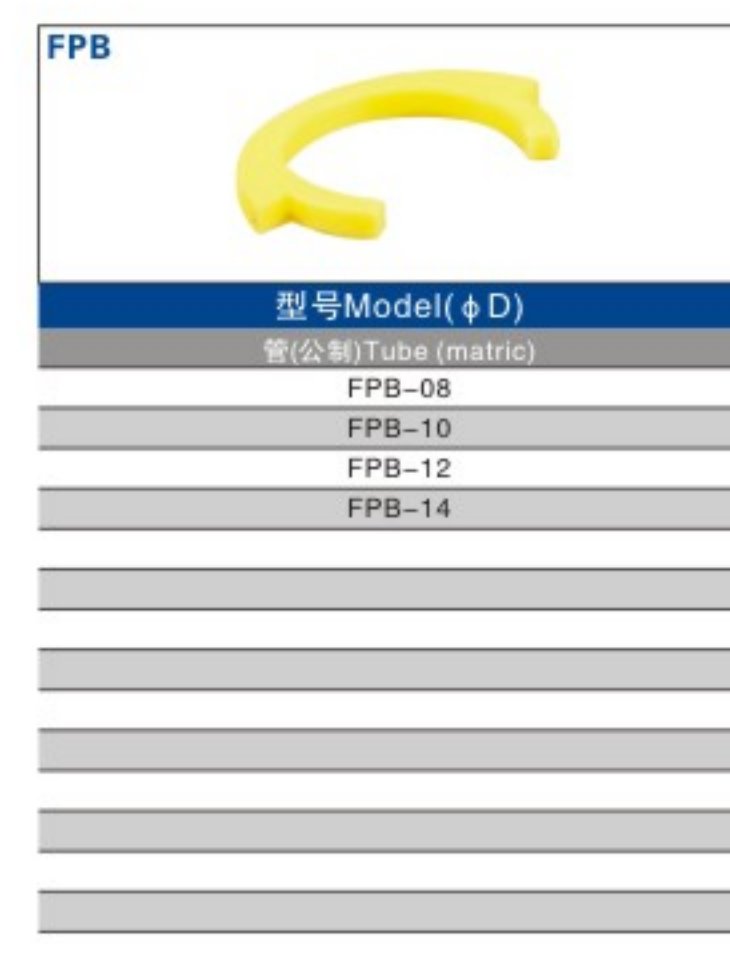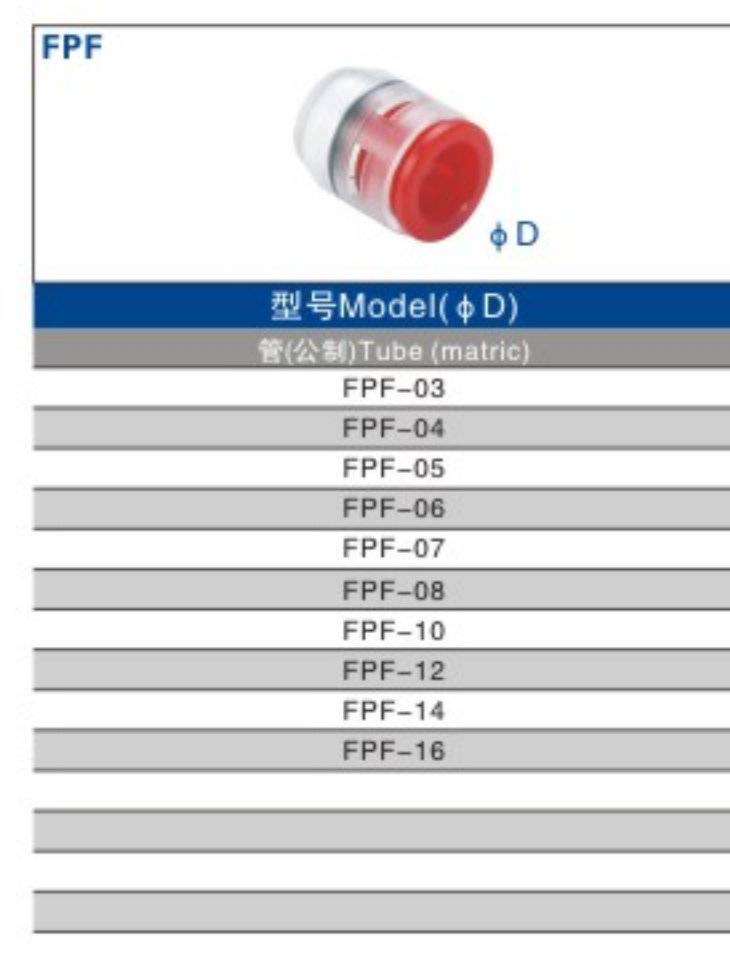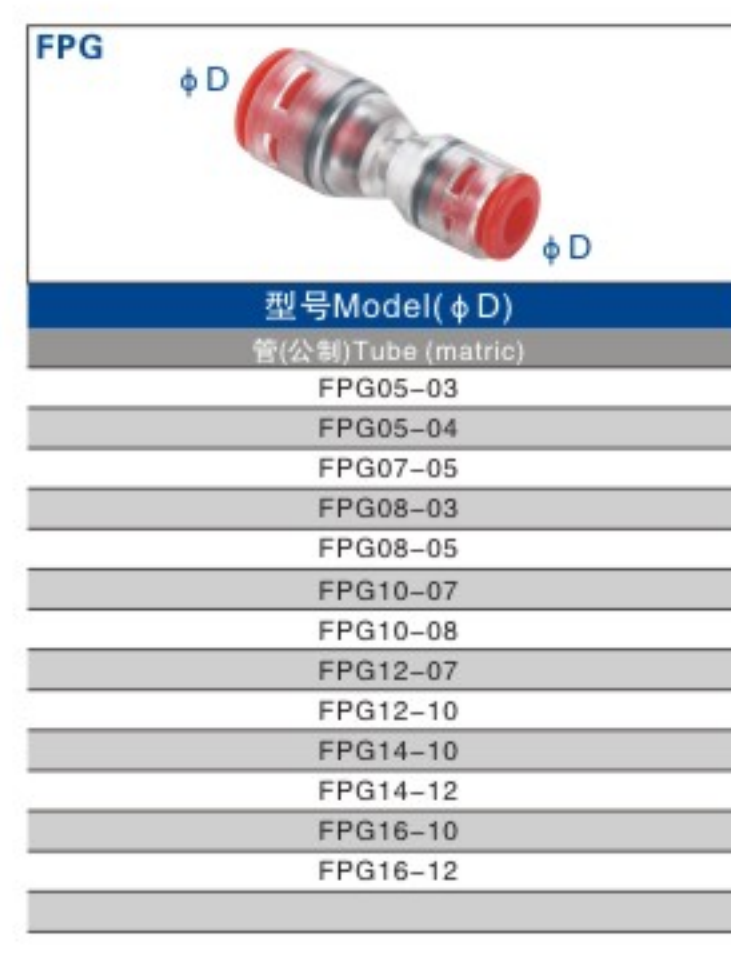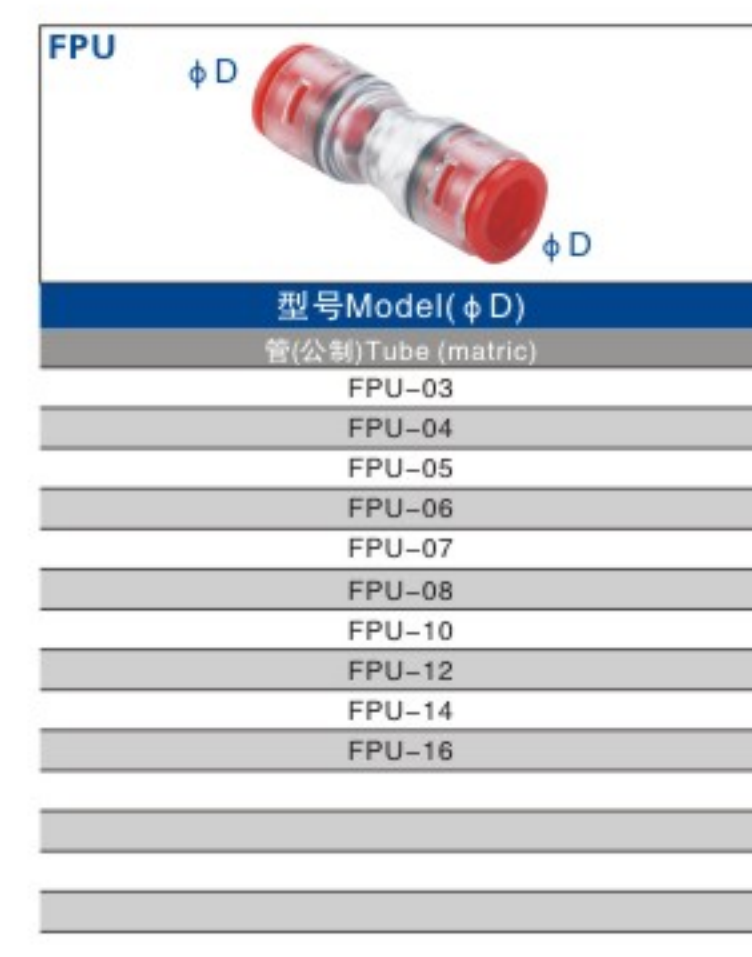

结构图 Structural diagram

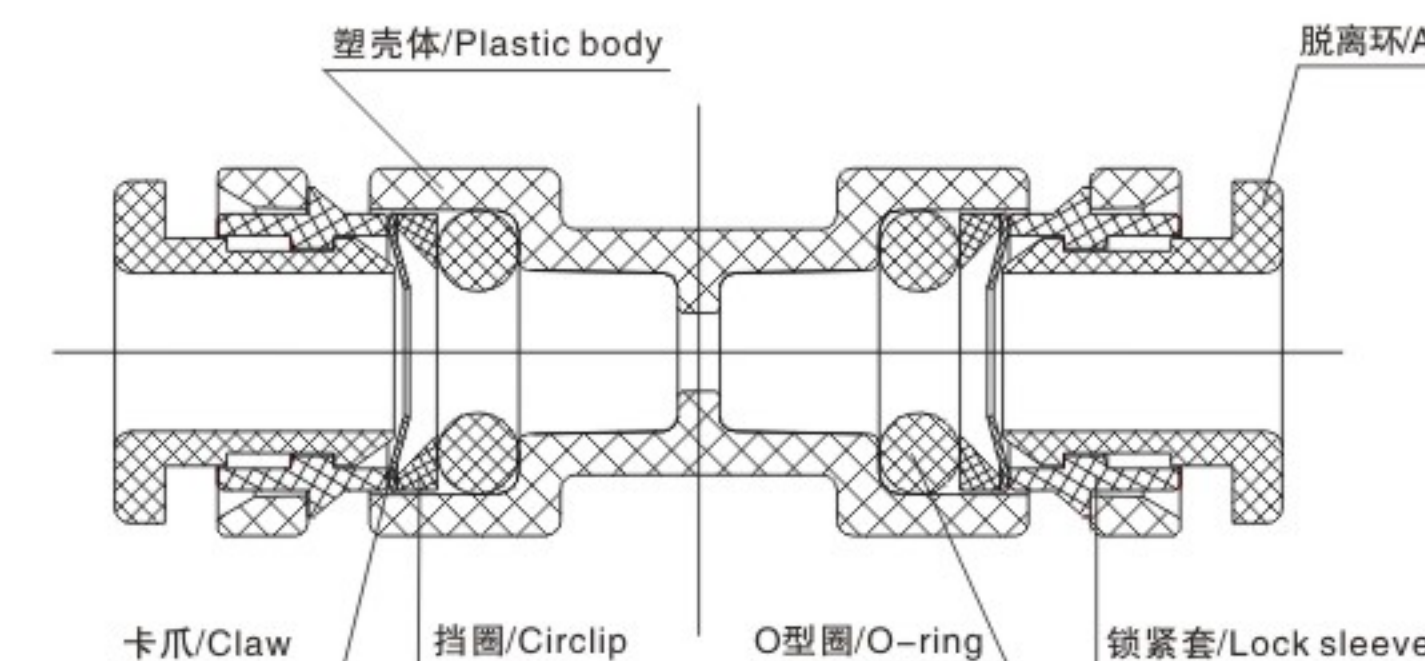

产品特性 Features

- 接头本体均采用无色透明的聚碳酸酯(PC)材料
- 具有耐酸、耐油、耐冲击，可视度高，韧性强等优良特性
- 可适用于通信光纤的布线
- The fitting's body uses clear PC material.
- Acid-resistant,oil-resistant,impact-resitant,and high visible
- Suitable for fiber management

消声器 SILENCERS



BSL-G 通用型消声器

型号Model(φ D)
管(公制)Tube (metric)
BSL-M5
BSL-G01
BSL-G02
BSL-G03
BSL-G04
BSL-G06
BSL-G10
BSL-G12
BSL-G14



BESL-G B型排气节流消声器

型号Model(φ D)
管(公制)Tube (metric)
BESL-G01
BESL-G02
BESL-G03
BESL-G04



SDV-G 铜接头消声器

型号Model(φ D)
管(公制)Tube (metric)
SDV-G01
SDV-G02
SDV-G03
SDV-G04
SDV-G06
SDV-G10



PSL-G 塑料消声器

型号Model(φ D)
管(公制)Tube (metric)
PSL-G01
PSL-G02
PSL-G03
PSL-G04
PSL-G06
PSL-G10



ISD-G 调速消声器

型号Model(φ D)
管(公制)Tube (metric)
ISD-G01
ISD-G02
ISD-G03
ISD-G04
ISD-G06
ISD-G10



BSLM-G 微型消声器

型号Model(φ D)
管(公制)Tube (metric)
BSLM-M5
BSLM-G01
BSLM-G02
BSLM-G03
BSLM-G04
BSLM-G06
BSLM-G10



PSE-G 塑料消声器

型号Model(φ D)
管(公制)Tube (metric)
PSE-G01
PSE-G02
PSE-G03
PSE-G04
PSE-G06
PSE-G10




PSU-G 塑料消声器

型号Model(φ D)
管(公制)Tube (metric)
PSU-M5
PSU-G01
PSU-G02
PSU-G03
PSU-G04
PSU-G06
PSU-G10

快换接头 PNEUMATIC QUICK COUPLER

备注：以下产品可以选用材质为铁，不锈钢。如果你需要不锈钢材质时，请在型号后加-SUS，比如SM-20-A-SUS

Note: the following products can be chosen material for iron, stainless steel.If you order stainless steel material,Pls add -SUS,For example:SM102-SUS.

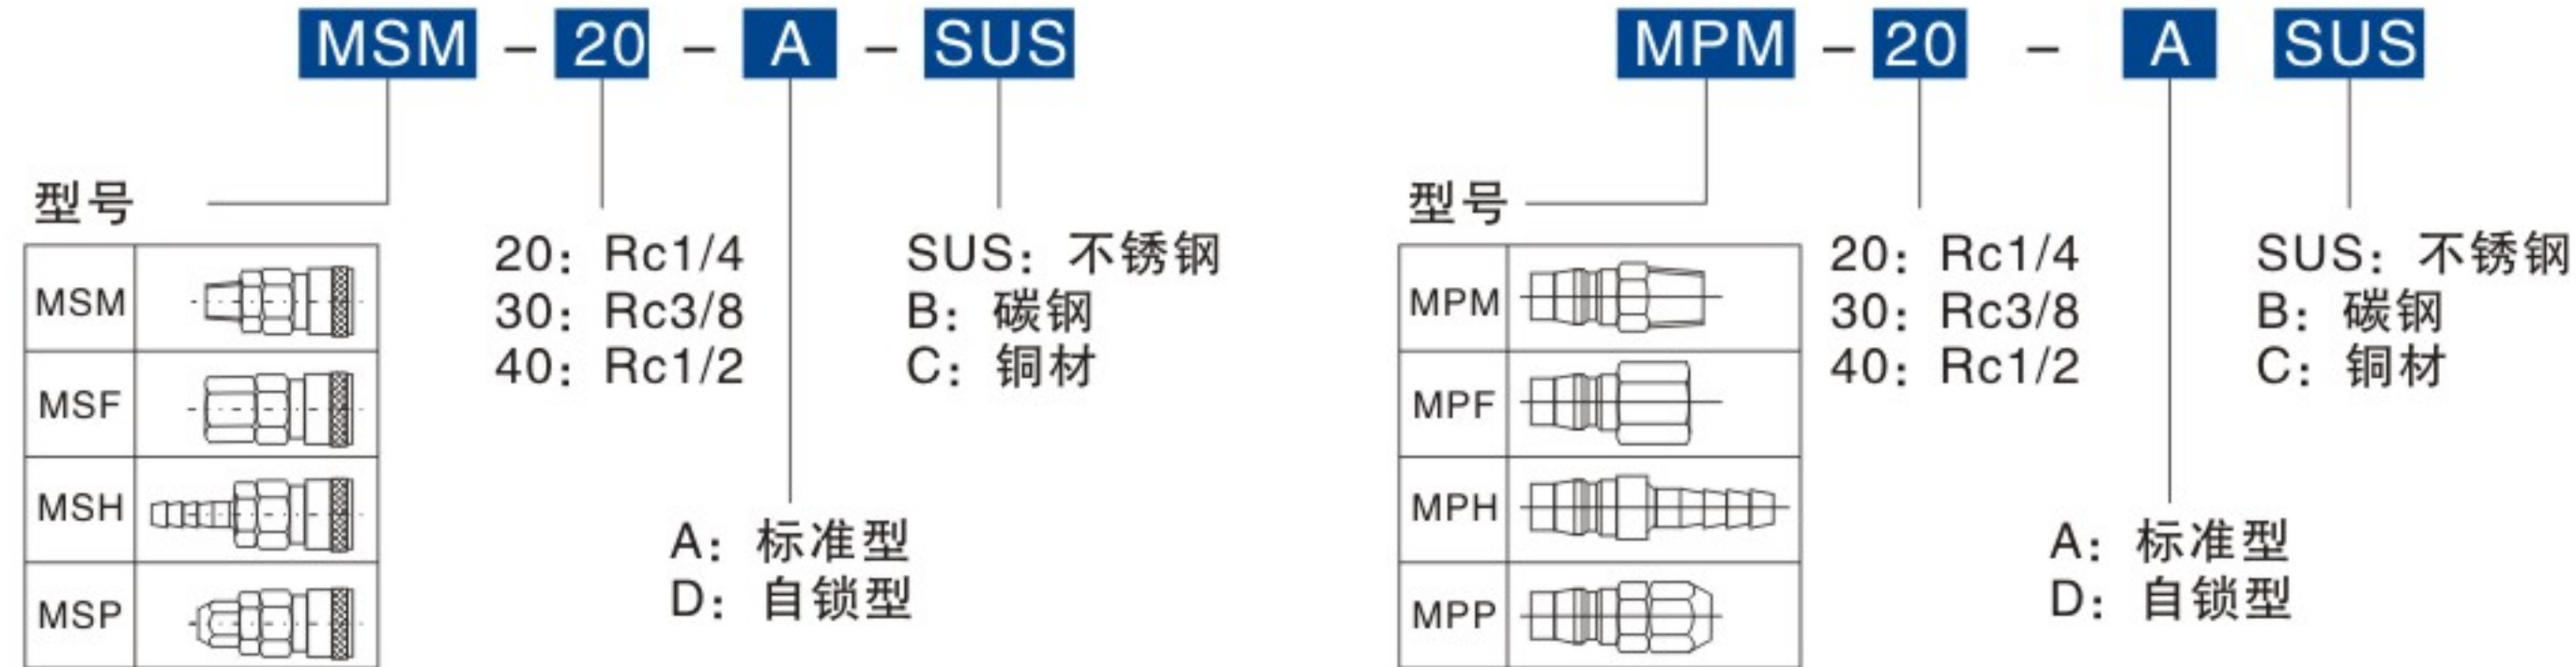

型号Model(φ D)
管(公制)Tube (metric)
SM102
SM103
SM104



型号Model(φ D)
管(公制)Tube (metric)
SH302 For 1/8"hose
SH303 For 1/4"hose
SH304 For 3/8"hose



型号Model(φ D)
管(公制)Tube (metric)
PM502
PM503
PM504



型号Model(φ D)
管(公制)Tube (metric)
PH702 For 1/8"hose
PH703 For 1/4"hose
PH704 For 3/8"hose



型号Model(φ D)
管(公制)Tube (metric)
SF2A
SF3A



型号Model(φ D)
管(公制)Tube (metric)
SF202
SF203
SF204



型号Model(φ D)
管(公制)Tube (metric)
SA402 5×8
SA403 6.5×10
SA404 8×12



型号Model(φ D)
管(公制)Tube (metric)
PF602
PF603
PF604



型号Model(φ D)
管(公制)Tube (metric)
PA802 5×8
PA803 6.5×10
PA804 8×12



型号Model(φ D)
管(公制)Tube (metric)
SF4B
SF5B
SF6B